



SPECIFICATIONS

AP-600

SERIES

RANGE HOOD



600 CFM/5.5 Sones @ 0.10" SP.
500 CFM/4.5 Sones @ 0.10" SP.
300 CFM/1.5 Sones @ 0.10" SP.

• Hood Dimensions

Overall bottom projection - 24"
 Available heights (without Soffit) - 10" and 18"
 Available widths: 30" and 36"

• Hood

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

• Lighting

3 - PAR16, 3.125" in length, type A screw-in base, 45 watt maximum Halogen lamps (included).

• Ducting Options

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical or horizontal duct adapter (included).

• Filters


Aluminum grease filters (included).

• Blower

Three speed, permanently split capacitor motor. Rated 120 volts, 60 hz.

• Blower Wheel

Dual inlet, electronically balanced polymeric centrifugal blower wheels, 57/8" width 59 paddles.

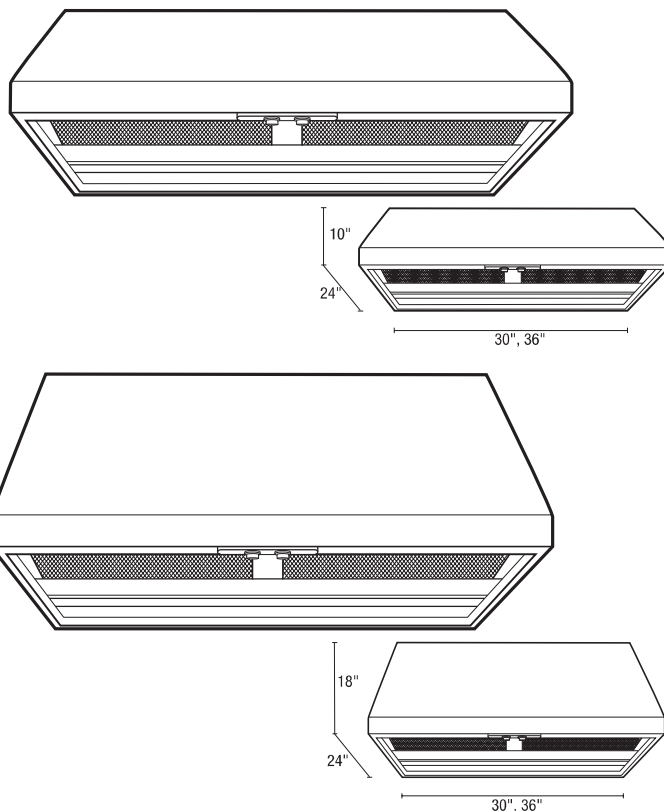

EXPANDED PERFORMANCE

Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Amps
	0	0.1	0.25	0.375	0.5	0.625				
High Speed	638	600	537	458	342	143	5.5	1492	164	1.25
Medium Speed	529	500	444	382	278	116	4.5	1206	131	1.10
Low Speed	317	300	267	229	167	-	1.5	760	95	.90

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 8 Edvac Drive
 Brampton, Ontario L6S 5P2
 Tel: (905) 456-2033 • 800-250-8767
 Fax: (905) 456-1015