



COOKTOP FEATURES

Total Burners	5 Brass Burners + 1 Griddle
Front Left	18,000 BTU
Rear Left	9,000 BTU
Right Burner	22,000 BTU
Front Center	9,000 BTU
Rear Center	18,000 BTU
Center Griddle	14,000 BTU

OVEN FEATURES

Oven Cavity	2
Oven Capacity	2.5 CU. FT. (Left) + 4.2 CU. FT. (Right)
Primary Oven BTU	14,000 BTU + 22,000 BTU
Broil oven BTU	16,500 BTU
Oven Modes	Broil, Bake, Convection Bake
Cleaning System	SteamClean
Oven Temp Range (F)	150° – 500 °

PRODUCT FEATURES


- **Five German Brass Burners (Up to 22,000 BTU):** Powerful performance with precise heat control for high-output cooking.
- **Integrated 14,000 BTU Griddle:** Ideal for breakfast foods, sandwiches, and everyday griddle cooking.
- **Dual Oven Cavities (6.7 Cu. Ft. Total Capacity):** Independent cooking zones provide flexibility for preparing multiple dishes simultaneously.
- **22,000 BTU Convection Oven:** Powerful convection cooking with even heat distribution and consistent results.
- **Infrared Broiler (16,500 BTU):** High-intensity broiling for exceptional searing and finishing.
- **Continuous Cast Iron Grates:** Durable design for smooth cookware movement and enhanced stability.
- **Exclusive Zinc Alloy Knobs with Blue Lighting:** Premium controls with illuminated accents.
- **Black Enamel Cooktop:** Durable, easy-to-clean cooking surface.
- **Carbon Fiber Handle:** Modern design with exceptional durability.
- **Soft-Close Oven Door with Removable Triple-Pane Glass:** Smooth operation with enhanced safety.
- **Blue Enamel Oven Interior:** Durable finish designed for easy maintenance.
- **SteamClean System:** Simplifies routine oven cleaning.
- **Included Accessories:** Telescopic guides with 2 racks, 1 enamel broiler pan.

SAFETY FEATURES

- Appliance gas safety device
- Cooktop auto-reignition system
- Child safety lock
- Appliance anti-tip bracket

PRODUCT SPECIFICATIONS

- Model No.: **VRN4802- PRO**
- Product Dimensions: **48"W × 27.375"D × 36" (depth without handle)**
- Package Dimensions: **53.9"W × 33.8"D × 45.35"H**
- Product Weight: **555 lbs**
- Electrical Supply: **120V / 60Hz**
- Electrical Service: **15-amp dedicated circuit**
- Gas Supply: **NG (Natural Gas) / LP conversio kit included**
- Plug: **Molded electrical plug, Type B (NEMA 5-15)**
- Distance to Vent Hood: **30" min / 36" max**
- Gas Connection: **½" gas fitting (bottom right)**

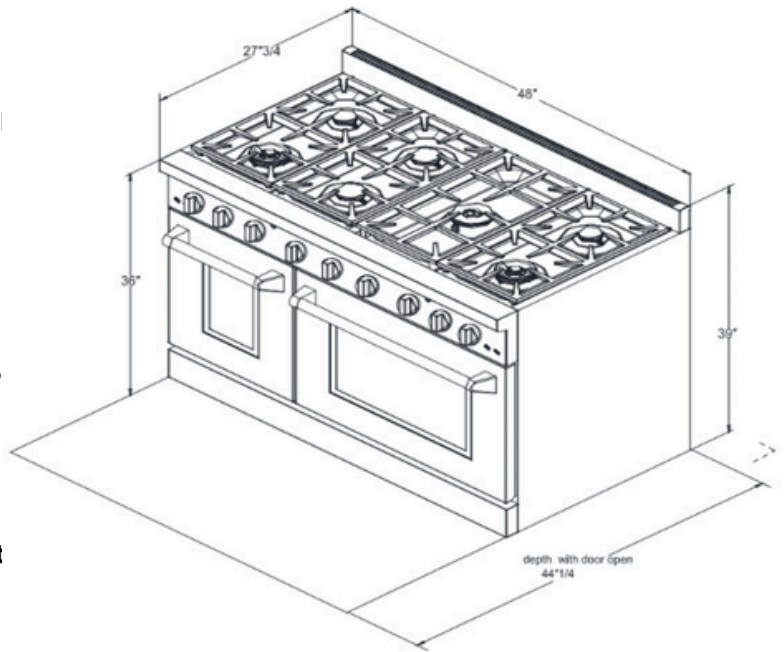

DIMENSIONS & CLEARANCES

The maximum depth of cabinets installed above the cooking surface should be 13" (330 mm), or as specified by the manufacturer and tested by the certification agency.

