

LB26H2200_

25.5 cu.ft. capacity Bottom Freezer Refrigerator

25.5 cu.ft Large Capacity

ENERGY STAR® Certified

Wi-Fi Enabled

ThinQ®

Smart Inverter Compressor

KEY FEATURES

SMART APPLIANCE

PRODUCT FEATURES

AVAILABLE COLORS

- PRINTPROOF™ STAINLESS STEEL
- BLACK STAINLESS STEEL





Proactive Smart Alerts to Keep Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

| SUMMARY | | REFRIGERATOR DOOR | | DIMENSIONS/CLEARANCES/WEIGHTS | |
|--|--------------------------------|---------------------------------------|--|---|-----------------------------------|
| Refrigerator (cu.ft.) | 17.2 | No. of Door Bins | 3 | Total (WxHxD) | 32 15/16" x 69 15/16" x 35 15/16" |
| Freezer (cu.ft.) | 8.3 | Door Shape | Flat | Width | 32 15/16" |
| Total Capacity (cu.ft.) | 25.5 | Handle Type | Bar (New) | Height (Top of Hinge or Door cap Décor) | 69 15/16" |
| ENERGY | | FREEZER | | Depth (with Handle) | 35 15/16" |
| ENERGY STAR® Certified | Yes | Door Type | Pull Drawer | Width (Door Open 90° without Handle) | 34 7/16" |
| Energy Consumption (kWh/Year) | 562 | Handle Type | Pocket Handle | Case Edge Clearance (Door Fully Open) | 12 15/32" |
| ICE & WATER SYSTEM | | Drawers / Shelves | 2-Tier Organization | Width (Door Open 90° with Handle) | 36 13/16" |
| Dispenser | N/A | Drawer Divider | Yes | Width (Door Fully Open without Handle) | 46 7/8" |
| No. Freezer Ice Maker | 1 | Freezer Light | LED Lighting | Door Edge Clearance with Handle | 4 1/16" |
| Freezer Ice Type | Cubed | No. of Door Bins/Construction | 2 | Door Edge Clearance without Handle | 1 11/16" |
| Freezer Daily Ice Production | 2.5 / 2.8 (Ice Plus) lbs. | DISPLAY | | Height to Top of Case | 68 5/8" |
| Freezer Ice Storage Capacity | 5.1 lbs | Display Type | Membrane/ White LED | Height (Floor to Top of Freezer Door) | 27 5/8" |
| Ice Plus | Yes | Temperature Control | Electronic/ Digital | Depth without Door | 29 1/2" |
| Filteration System | 1 Stage | Door Alarm | Yes | Depth without Handles | 35 15/16" |
| Filter | LT1000P | Child Lock | Yes | Depth (to Hinge Cover) | 19 5/8" |
| COOLING | | Smart Diagnosis | Yes | Depth (Total with Door Open) | 63 1/4" |
| Compressor Type | Smart Inverter Compressor | Auto Closing Door Hinge | No | Depth (Draw Open Fully without Handle) | 53 3/8" |
| Refrigerant | R600a / 70g / 2.47oz | Wi-Fi Enabled | Yes | Installation Clearance | Sides 1/8", Top 1", Back 2" |
| Evaporator | 1 | ThinQ® | Yes | Carton Dimensions (WxHxD) | 35" x 72" x 36 11/16" |
| Multi Air Flow Cooling | Yes | ThinQ® Care (Proactive Customer Care) | Yes | Weight (Unit/Carton) | 234 lb / 250lb |
| Temperature Sensors | 2 | Sabbath Mode | Yes | LIMITED WARRANTY | |
| REFRIGERATOR | | ADA Compliant | Yes | Parts & Labor | 1 Year |
| No. of Shelves | 4 Split (4 Fixed) | Garage Ready | No | Sealed System (Parts & Labor) | 5 Years |
| Shelf Construction | Spill Protector Tempered Glass | MATERIALS & FINISH | | Compressor (Parts & Labor) | 5 Years |
| Shelf Trim | White décor | Hidden Hinges | Yes | Inverter Compressor (Parts only) | 10 Years |
| No. of Crisper Bins | 2 | Surface | Smooth | UPC CODES | |
| Pantry (Glide N Serve) | Yes (Normal) | Toe Grill | No | LB26H2200S | 195174122310 |
| Cool Guard | No | All Available Colors | PrintProof™ Stainless Steel Black Stainless Steel | LB26H2200D | 195174122341 |
| Duct (Air Filter) | | Insulation | Low GWP and Zero ODP Blowing Agent | | |
| [Fresh Air Filter, Multi Air Flow] | Multi Air Flow | | | | |
| Light | Yes | | | | |
| Light (Back Lit Lighting) | No | | | | |
| Backwall [Metallic Décor, White Decor, LED Backwall] | White décor | | | | |

LB26H2200_

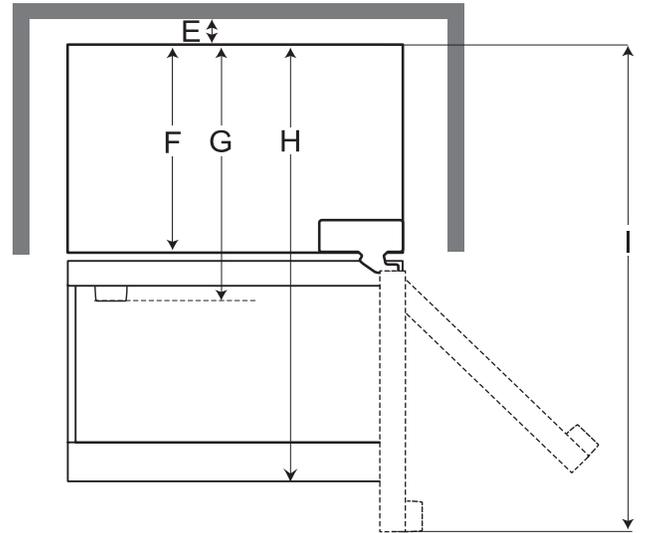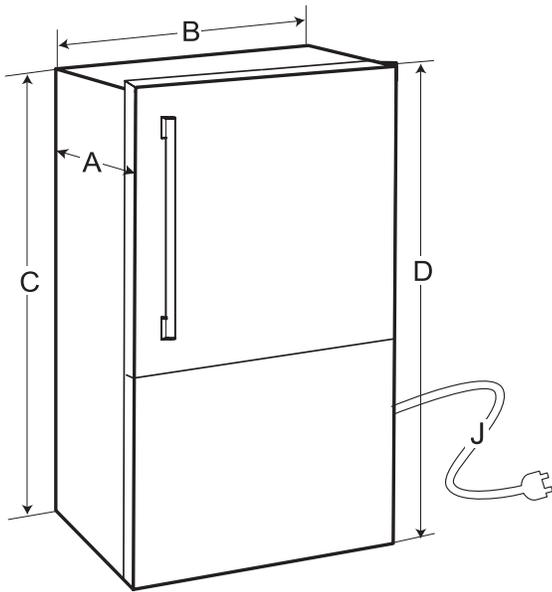

DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

DIMENSIONS

| | | |
|---|--|---------------------|
| A | Depth without Handle | 35 15/16" (913 mm) |
| B | Width | 32 15/16" (836 mm) |
| C | Height to Top of Case | 68 5/8" (1743 mm) |
| D | Height to Top of Hinge | 69 15/16" (1776 mm) |
| E | Back Clearance | 2" (51 mm) |
| F | Depth without Door | 29 1/2" (748 mm) |
| G | Depth with Handle | 35 15/16" (912 mm) |
| H | Depth (Total with Freezer Drawer Open) | 54 3/8" (1381 mm) |
| I | Depth (Total with Door Open 90°) | 63 1/4" (1606 mm) |
| J | Length of Power Cord | 61" (1550 mm) |

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or side to side. If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1. Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
2. Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE

- A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

