


UAGQ

Wall-mounted extraction hood

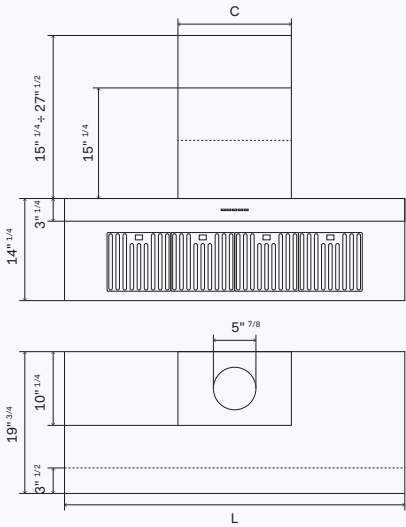

Color range

Body



Stainless
steel – SS



UAGQ30

L = 29" ⁷/₈ / C = 13"

Stainless steel

Stainless steel back panel (h. = 26" / sp. = ¹/₂")

AM4-76

Flue extension (h. 31" ¹/₂)

EA0883004000008



UAGQ36

L = 35" ⁷/₈ / C = 13"

Stainless steel

Stainless steel back panel (h. = 26" / sp. = ¹/₂")

AM4-90

Flue extension (h. 31" ¹/₂)

EA0883004000008



UAGQ40

L = 39" ⁷/₈ / C = 13"

Stainless steel

Stainless steel back panel (h. = 26" / sp. = ¹/₂")

AM4-100

Flue extension (h. 31" ¹/₂)

EA0883004000008



UAGQ48

L = 47" ⁷/₈ / C = 15" ³/₄

Stainless steel

Stainless steel back panel (h. = 26" / sp. = ¹/₂")

AM4-120

Flue extension (h. 31" ¹/₂)

EA0883009000008



UAGQ60

L = 59" ¹/₂ / C = 15" ³/₄

Stainless steel

Stainless steel back panel (h. = 26" / sp. = ¹/₂")

AM4-150

Flue extension (h. 31" ¹/₂)

EA0883009000008

General features

- Front LED bar
 - AISI 304 stainless steel body
 - Professional stainless steel baffle filters
 - Automatic filter cleaning warning light
- Maximum air flow 600 cfm
 - Maximum power: 450 W
 - Flue outlet hole dimension 5" ⁷/₈
 - Four-speed controls (3 + intensive)
 - Automatic delayed shutdown