

ESW 6880

30 inch warming drawer with 10 <sup>13/16</sup> inch front panel height with the low temperature cooking function - much more than a warming drawer.




- Ultimate enjoyment with Low temperature cooking
- Versatile use thanks to four operating modes
- Convenient and easy – Touch control
- Elegant and practical - Soft-close self-closing mechanism
- Safe is safe - Timer function with automatic switch off

EAN: 4002515387344 / material number: 09685120


| <b>Construction type</b>                                   |                   |
|--|-------------------|
| Gourmet drawer   | •                 |
| <b>Design</b>  |                   |
| PureLine   | •                 |
| Color  | Clean Touch Steel |
| Control panel with sensor controls                         | •                 |
| Control panel with text                                    | •                 |
| <b>Convenience features</b>                                |                   |
| Prewarming of dishware                                     | •                 |
| Keeping food warm  | •                 |
| Precise electronic temperature control from 104°F to 185°F | •                 |
| <b>Operating modes</b>                                     |                   |
| Warm cups  | •                 |
| Warm plates  | •                 |
| Keeping food warm  | •                 |
| Slow roast   | •                 |
| <b>Control panel</b>                                       |                   |
| Fully telescopic runners for easy loading and unloading    | •                 |
| Self-closing with softclose feature                        | •                 |
| Stop programming/Timer function                            | •                 |
| Capacity   | 12 place settings |
| Sabbath program  | •                 |
| <b>Cleaning convenience</b>                                |                   |
| Stainless steel front with Clean Touch Steel surface       | •                 |
| Flush control panel  | •                 |
| <b>Safety</b>  |                   |
| Cool front   | •                 |
| Safety cut-out   | •                 |
| Non-slip liner   | •                 |
| <b>Technical data</b>                                      |                   |
| Appliance width in in.(mm)                                 | 29 7/8 (757)      |
| Appliance height in in.(mm)                                | 10 3/4 (271)      |
| Appliance depth in in.(mm)                                 | 24 (608)          |
| Oven cavity volume in cu. ft. (l)                          | 2.12 (60.0)       |
| Useable interior height in in.(mm)                         | 8 1/8 (205)       |
| Total connected load in kW                                 | 1                 |
| Voltage in V   | 120               |
| Fuse rating in A   | 10                |
| Number of phases   | 1                 |
| Frequency in Hz  | 60                |
| Wire length in ft (m)                                      | 4 (1.5)           |
| <b>Standard accessories</b>                                |                   |
| Non-slip liner   | 1                 |
| Rack for increased capacity                                | 1                 |

## ESW 6880


30 inch warming drawer with 10 <sup>13</sup>/<sub>16</sub> inch front panel height with the low temperature cooking function - much more than a warming drawer.

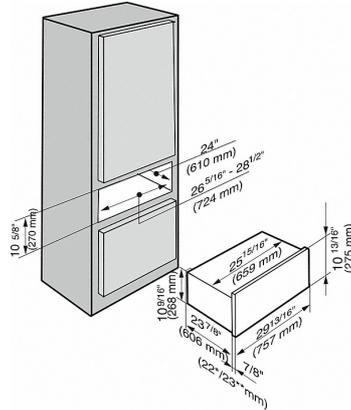


ESW 6\*80, CLST (Installation drawing) - USA

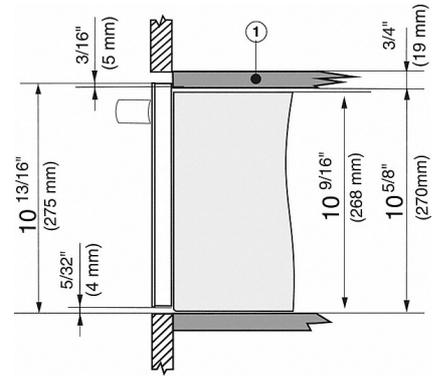

ESW 6\*80, CLST (detailed installation drawing) - USA

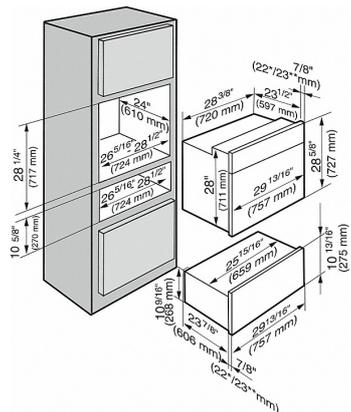

ESW 6\*80, CLST (Installation drawing) - USA

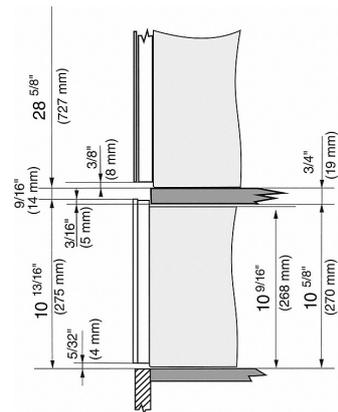

ESW 6\*80, CLST (detailed installation drawing) - USA