

Refrigeration Equipment Sandwich/Salad Preparation Table, 72" with 18GN 1/6 containers - Stainless Steel (R290)

ITEM # _____
MODEL # _____
NAME # _____
SIS # _____
AIA # _____



738258 (KCHST70.18)

3-door sandwich/salad preparation table for 18 GN 1/6 containers, 72", R290 refrigerant gas, +33/+41°F, stainless steel

Short Form Specification

Item No.

3-door sandwich/salad refrigerated preparation table. Exterior back panel in aluminium, exterior bottom panel in galvanized steel, side and top panels in 430 stainless steel; interior back, top panels and interior bottom panel in 304 stainless steel, worktop in 430 stainless steel. Built-in refrigeration unit and an insulated lid to maintain food freshness. Fin & Tube Condenser improves performance in high-temperature environments. Automatic Defrost Cooling System to provide worry-free performances. Full-depth cutting board of 71,7x11,4x0,5 in. Control panel, Vinyl-Coated Steel adjustable shelves, removable door gaskets and self-closing doors with 90-degree stay-open feature. Temperature range: +33/+41°F.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.


Main Features

- External temperature display.
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.
- Removable gasket for easy cleaning operations.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Full Depth cutting board.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.
- Heavy duty Vinyl coated steel shelves.

Construction

- Heavy duty casters.
- Insulated lid maintains food freshness.
- Holds 18 1/6 pans.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

APPROVAL: _____

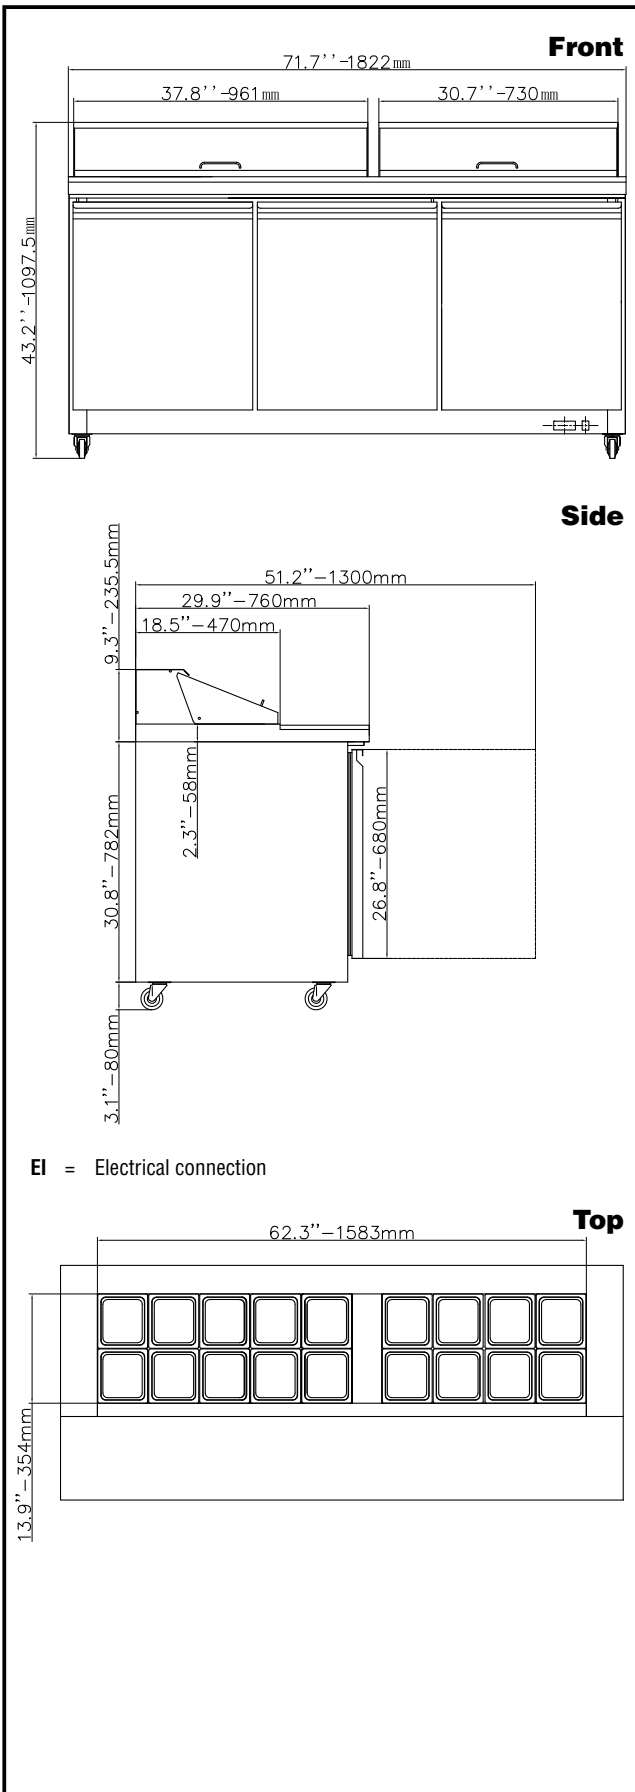

Electric

Supply voltage:

738258 (KCHST70.18) 115 V/1 ph/60 Hz

Electrical power, max:

0.7 kW

Plug type:

NEMA 5-15

Capacity:

Gross capacity:

18 cu.feet

Key Information:

Door hinges:

1 Left+2 Right

External dimensions, Width:

71 3/4" (1822 mm)

External dimensions, Depth:

29 15/16" (760 mm)

External dimensions, Height:

43 3/16" (1097.5 mm)

Number and type of doors:

3 Full

Internal Dimensions (depth):

23 13/16"

Internal Dimensions (height):

23 1/2"

Internal Dimensions (width):

66 7/16"

Shipping height:

47 1/4" (1200 mm)

Shipping weight:

419 lbs (190 kg)

Shipping volume:

63.12 ft³ (1.79 m³)

Number and type of grids (included):

3 - 538x425/580x425

Type of external material:

Stainless Steel

Type of internal material:

Polystyrene

Warranty:

3 / 5 years

Refrigeration Data

Compressor power:

R290

Refrigerant type:

32 °F

Operating temperature min.:

41 °F

Operating temperature max.:

Condenser type:

Fin & tube

Defrost type:

Auto Defrost