



36" Overhead Range Hood

Ventilation

Available Products: FHWC3625MW, FHWC3625MB, FHWC3625MS

Available Colors: White, Black, Stainless Steel

Version: 08/22

Product Specifications

Ventilation System

Ductless Vent	Yes
Exhaust Fan Speeds	2
Minimum Air Flow Capacity	160 CFM
Maximum Air Flow Capacity	190 CFM
Maximum Sones Rating	7 sone
Charcoal Filter Included	No

Surface Light System

Lighting Type	Incandescent
---------------	--------------

Electrical Specifications

Voltage Rating	120 V
----------------	-------

Safety Certifications and Approvals

UL Listed	Yes
-----------	-----

Controls

Control Type	Rocker Switch
--------------	---------------


Dimensions and Volume

Height	5"
Width	36"
Depth	18 5/8"

General Specifications

Prop 65 Label	Yes
Sound Level	67.9 dBA
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Installation Diagram

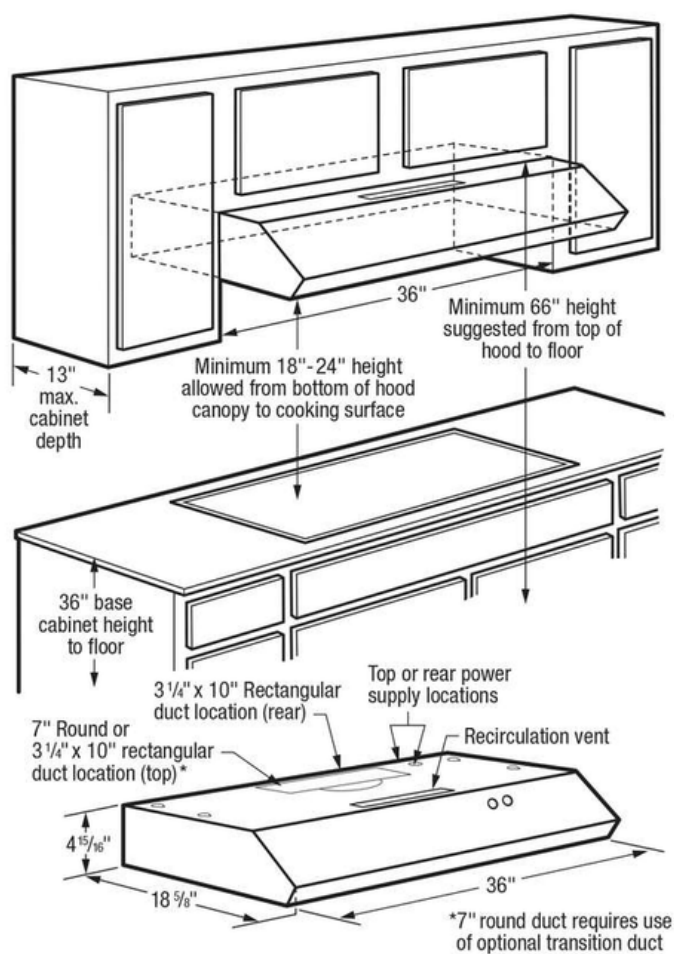


Exhaust Options


Vent hood can be vertically or horizontally ducted outside using round or rectangular duct; or recirculated inside with no ducting required.

For detailed duct preparation and installation specifications, refer to installation instructions on web.

Outside Vertical – 7" Round Duct Cabinet Bottom

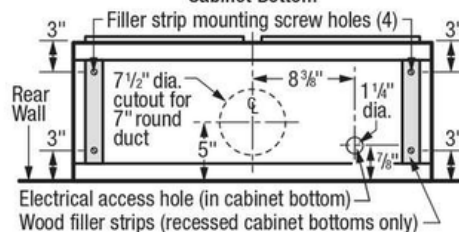

Outside Vertical – 3 1/4" x 10" Rectangular Duct Cabinet Bottom

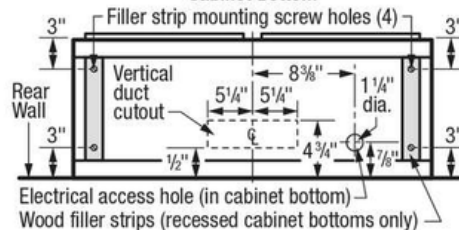

Outside Horizontal – 3 1/4" x 10" Rectangular Duct Cabinet Front

