

SPECIFICATIONS


0. 200		
Overall Width	29 3/4" (75.6 cm)	
Overall Height	53 1/16" (134.7cm)	
Overall Depth Including Handle	26 5/8" (67.6 cm)	
Oven Door Clearance	20 11/16" (52.6 cm)	
Overall Oven Interior Capacity	10.0 cu. ft. (283.2 liters)	
Oven Interior Dimensions $(W \times H \times D)$ each oven	25" × 17 3/8" × 20 1/4" (63.5 × 44.1 × 51.4 cm)	
Minimum Cabinet Width*	30" (76.2 cm)	
Minimum Cabinet Depth*	24" (61.0 cm)	
Minimum Base Support	375 lbs. (170 kg)	
Cutout Width*	28 1/2" (72.4 cm) Min 28 5/8" (72.7 cm) Max	
Cutout Height*	51 13/16" (131.6 cm) Min 51 15/16" (131.9 cm) Max	
Cutout Depth*	23 1/2" (59.7 cm) Min	
Volts/Hertz/Amps	240/208 V AC, 60 Hz, 40A	
Conduit Length	40" (72" available special order: WB18T10398)	
Electrical Rating	6.8 kW at 208V 9.0 kW at 240V	
Shipping Weight	390 lbs. (178 kg)	


^{*} Additional space will be needed for flush installation.

ATTENTION ELECTRICIAN:

A 240/208V, 60Hz, 40 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.


OVERALL DIMENSIONS

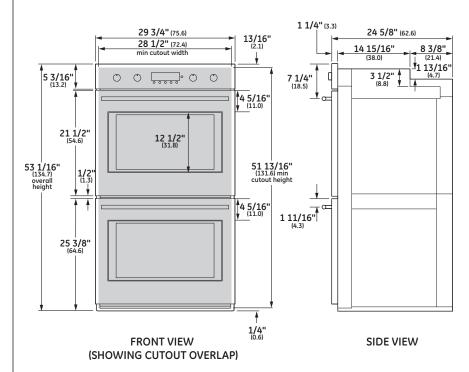




Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

WALL INSTALLATION

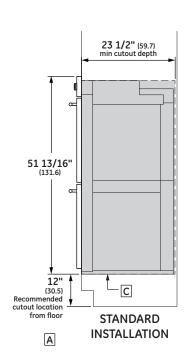

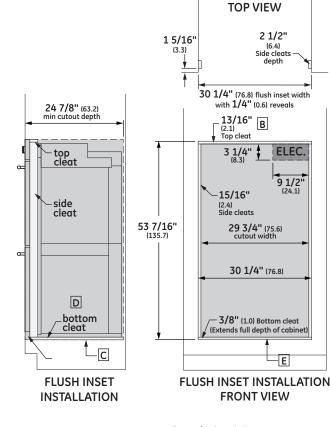


Allow 1/4" (0.64) clearances from side edges of oven door.

NOTES

- A Based on a user height of 5' 6" to 5' 10"
- B Junction box location (May also be located in adjacent cabinet.)
- C Platform must be able to support 375 lbs (169 kg)
- D Cabinet surfaces must be an appearance finished surface for flush installation.
- E Cleats may be visible and should be finished to match cabinetry.
- F Dimension per **Warming Drawer** requirement

INSTALLATION OVER WARMING DRAWER

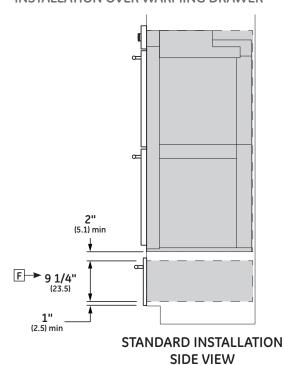

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are

in centimeters unless otherwise noted.

FEATURES AND BENEFITS

True European Convection with Direct Air - Channels heated air from the top of the oven and circulates it around food on all sides for perfectly uniform baking and roasting

10.0 Cu. Ft. Oven Capacity (5.0 each oven) - Accommodates even the largest meals

Ten-Pass Bake Element - Covers more surface area for more even baking results

All-Glass Interior Door Panel – Offers a visually striking look that's easy to clean

Theatre-Style LED Oven Lighting - Located on both sides of the oven to enhance visibility and provide a clear view of food, regardless of rack position

Stainless steel back-lit digital control knobs - Rotate with smooth precision. An indicator light in each knob makes it easy to view and select heat settings

Notification Lighting - Allows you to check cooking status with a quick glance

Self-Cleaning, Full-Extension Oven Racks (each oven) - Glide in and out smoothly on stainless steel ball bearings, and are designed to be left in the oven during the self-clean cycle

Self-Clean with Steam Clean Option - Gives you flexible options for thorough oven cleaning

Ten-Pass, Dual Broil Element - Evenly browns dishes of all types and sizes

WiFi Connect - Allows you to control oven functions from anywhere inside or even outside your home, using your smartphone or other web-enabled mobile device

Black Interior – Offers a stylish complement to the sophisticated exterior design









Client GE Appliances		NOTES:
Job Number 82323		8.5" x 11"
File Name ZET2SHSS_r3	3.indd	4pgs - 4/C
Date 7/6/15		
MB Database gea_creative/79	9710	
Operator glb, jv		
Art Director Chris Colby		COLOR: ■ 4 Color □ Black and White
Art ACD Chris Colby		□ 1 PMS □ 2 PMS □ 3 PMS
6	AE:	Art ACD: Art Director:
POWERCREATIVE	Proofreader:	Writer ACD:

MB/ gea_creative/ 0_quick_specs/ quick specs/ 2015_Monogram / Wallovens / (or appropriate product line subfolder)