COREtec - One Plus

Product Specifications

Style Number	VV585
Construction	Waterproof Foamed Core
Edge Profile	Micro Bevel
Nominal Dimensions	6" wide, 48" long

	US Units	Metric Un
Actual Product Width	5.91"	15 cm
Actual Product Length	48.03"	122 cm
Wear Layer Thickness	12 mil (0.012")	0.3 mm
Overall Product Thickness	0.255"	6.5 mm
Core Thickness	0.217"	5.5 mm
Attached Underlayment	Attached Cork	
Attached Underlayment Thickness	0.039"	1 mm
Finish	UV Acrylic	
Installation Methods	Floating or Direct Glue	
Profile	Angle/Tap	
Country of Origin	Imported	

Packaging

Area per Box	31.52 sq ft	3 sq m
Pieces per Box	16 pcs	
Weight per Box	45.5 lbs	20.63 kg
Boxes per Pallet	42 boxes	

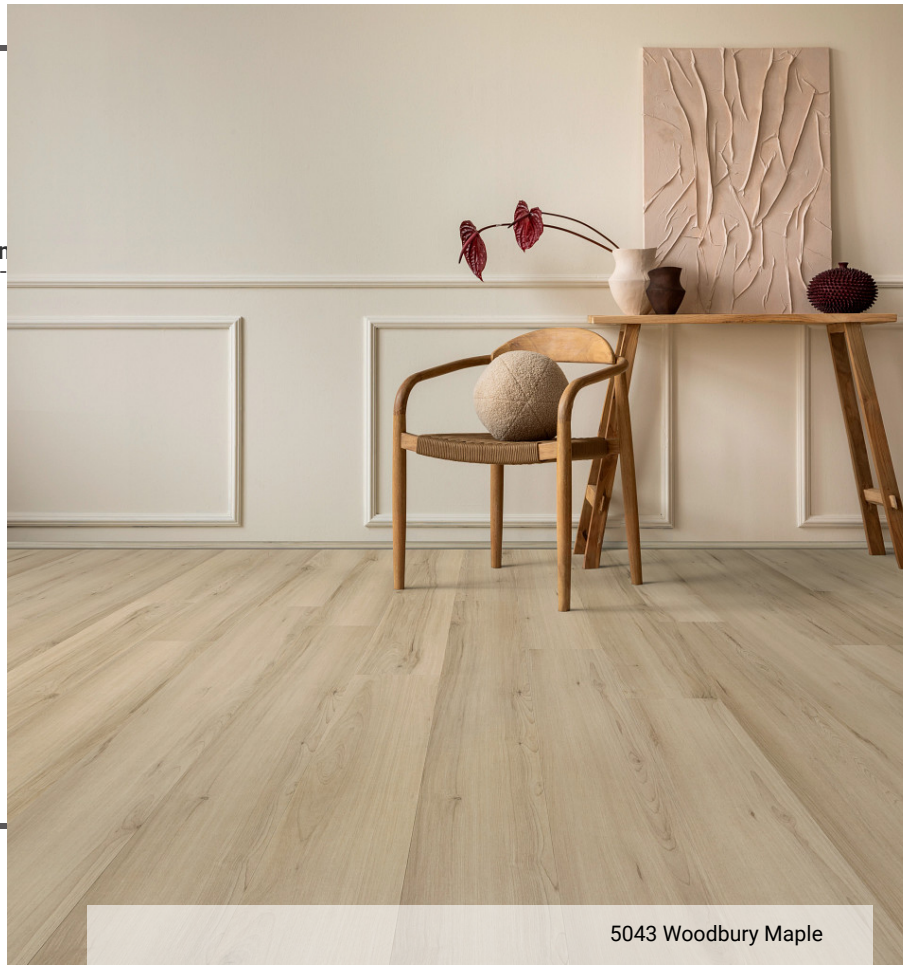

5043 Woodbury Maple

50004 Deep Lake Oak

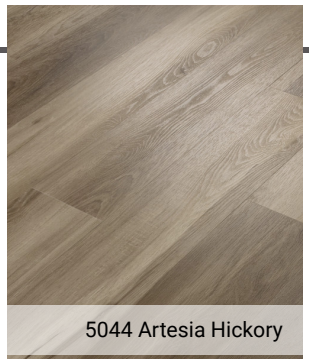

5044 Artesia Hickory

50005 Laguna Beach Oa

Color Variation: Moderate

50001 Salton Chestnut

Color Variation: Substantial

50008 Caspian Oak

Color Variation: Substantial

50009 Fresno Chestnut

50010 Irvine Chestnut





For reference purposes only if printed or downloaded.

50012 Venture Chestnu

lus

Static Load (ASTM F970)	Passes
Residual Indentation (ASTM F1914)	Passes
Resistance to Heat (ASTM F1514)	Passes
Resistance to Light (ASTM F1515)	Passes
Resistance to Chemicals (ASTM F925)	Passes
Smoke Density (ASTM E662)	Passes
Radiant Panel (ASTM E648)	Passes, Class I
Slip Resistance (ASTM D2047)	ADA compliant

Test Reports may be included or listed by the manufacturing/inventory style number as opposed to the noted selling style number.

Warranties

USF 25 Years

Residential Resilient Limited Warranty - Defects, Wear, Waterproof, Petproof

5 Year Light Commercial

Coordinating Trim

Baby Threshold*

BT3HU | 94"



T-Molding*

02V30 | 94"



Quarter Round

01V33 | 94"



Flush Stairnose

FS5CT | 94"

02V18 | 94"

*Packaged with molding track

Stair Tread

Stair Tread

03Z70 | 48"

For reference purposes only if printed or downloaded.