



Powered by the exclusive iQ Blower System with GPS Technology for the quietest, most energy efficient and fastest smoke and odor removal available in a range hood

Four-speed electronic light-touch controls are operated with the ACR3 remote control, included

10-minute delay-off and filter clean reminder provide convenient operation

Four 3-watt LED light strips provide bright cooktop lighting

Designed to work with optional Automatic make-up air dampers

Perimeter aspiration provides superior ventilation, backed up by mesh grease filters

Stainless Steel panels for a designer look

Model Numbers:

CC34IQ63SB CC34IQ63SB CC34E63SB



Panels provide perimeter aspiration and conceal washable grease filters.



Bright, energy-efficient LED lighting.



Central control button with LED indicator ring.



Included ACR3 remote control lets the busy cook stay in control from anywhere in the kitchen.

Hood Sizes

Width 63"
Depth 27-1/2"

Finish

Stocked Brushed Professional Grade Stainless Steel
Special Order Not Available

Features

Lighting Type LED
Number of Lamps 4 Light strips (3 watts each, 660 Lumens total, 2800-3200K)
Lighting Levels 3
Lighting Lamps Included Yes
Control Type 4-speed Electronic Light Touch
Control Features Delay-off, Filter Clean Reminder
Remote Control ACR3 Included
Filter Type Mesh Grease Filter with Perimeter Aspiration
Non-ducted Capability No

Hood Blower Included (CC34IQ63 and CC34IQ63)

Internal	iQ6	iQ12
Blower CFM	600	1200
Sones Low/High	0.3/8.0	0.6/11.5

Hood Blower Options (CC34E blowers sold separately)

*External In-line:	ILB3	ILB6	ILB9	ILB11
Max CFM	280	600	800	1100
*External Exterior:	EB6	EB9	EB12	EB15
Max CFM	600	900	1200	1500


*Sone levels using External blowers are typically half of comparable CFM Internal blowers.

Accessories


Non-ducted Kit ANKCC34 63
Charcoal Replacement Filters AFCCCE34 63
Automatic MUA Damper MD6T, MD8T, MD10T (Requires Fresh Air Inlet)
Fresh Air Inlet 641FA, 643FA, 610FA

Installation Requirements


Electrical Amps @ 120V Internal: 4.0, External: 6.5
Electrical connection Direct
Duct Size—Internal Blower 8" and 10" for iQ12
Duct size—External Blower 8"
Duct Direction Horizontal
Vertical (External vent only)
Backdraft Damper Included

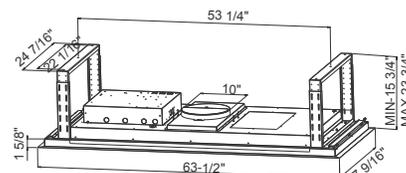

CC34E

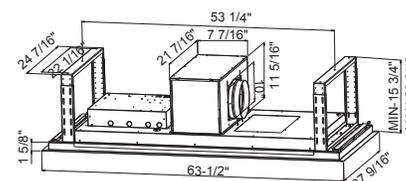

CC34IQ63

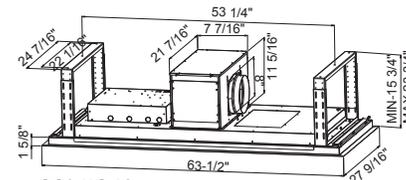

CC34IQ63

Installation height above the cooking surface 48" minimum, 72" maximum recommended.

