accucold

ARS1ML



21.5" x 17.5" x 19.75" (H x W x D)

Performance series Med-Lab 1 cu.ft. compact all-refrigerator with antmicrobial silver-ion handle and hospital grade cord with 'green dot' plug

Highlights:

Intelligent microprocessor digital temperature controller

Improved temperature accuracy with a separate temperature probe for continuous product readout to simulate stored product temperature

Powder-coated handle with naturally occurring silver ions to help reduce germ spread

Product Features:


Purpose-built design	Designed and purpose-built to meet the demanding needs of scientific, life science, laboratory, and medical cold storage applications
+/-1ºC Variation	The published temperature variation is derived from the maximum deviation of an NTC sensor in a 1 oz. vial located nearest the chamber geometric center during a 24 hour test period
Antimicrobial silver ion-coated handle	Powder-coated handle with naturally occurring silver ions to help reduce germ spread
Adjustable temperature	Intuitive controls let you adjust the interior temperature between +2 to +10ºC
Temperature alarm	Visual and audible alarms alert if the interior temperature rises or falls out of set range
Remote alarm contacts	Electronic controller is equipped with a volt-free contact for alarm forwarding to an external remote system (contacts located in the external rear of the unit)
Automatic defrost with adjustable cycle defrost	Adjustable cycle defrost operation ensures the unit avoid temperature spikes and ice buildup
Access port	Includes a pre-installed 1/2" probe hole in the right interior wall to allow easier connection to user-provided monitoring equipment
Open door alarm	Alarm will sound if the door is left ajar for over 4 minutes (adjustable from 1-99 minutes)


ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**

accucold

ARS1ML Specifications:

Overview	
Height of Cabinet	21.5" (55 cm)
Width	17.5" (44 cm)
Width with Door Open	18.0" (46 cm)
Depth	19.75" (50 cm)
Depth with Handle	21.5" (55 cm)
Depth with door at 90°	36.0" (91 cm)
Capacity	1.0 cu.ft. (28 L)
Defrost Type	Automatic
Door	White
Cabinet	White
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Amps	0.6
Voltage/Frequency	115 V AC/60 Hz
Weight	61.0 lbs. (28 kg)
Shipping Weight	68.0 lbs. (31 kg)
Parts & Labor Warranty	2 Years
Compressor Warranty	5 Years
UPC	761101062969
Refrigerator Features	
Door Swing	RHD
Reversible	Yes
Shelf Type	Wire
Shelf Qty	3
Adjustable Shelves	Yes
Thermostat Type	Digital
Fan Type	Interior
Refrigerant Type	R600a
Refrigerant Amount	0.71oz.
Interior Light	Yes
Temperature Range	2 to 10ºC
Sound Level	39 dB
Dimensions	
Interior Height	15.75" (40 cm)
Interior Width	14.0" (36 cm)
Interior Depth	8.0" (20 cm)

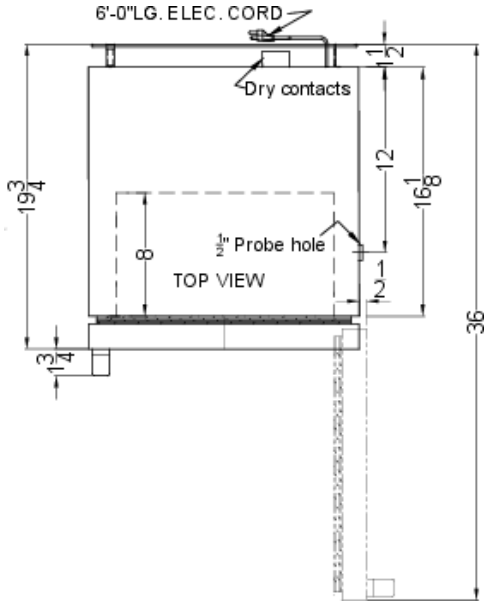

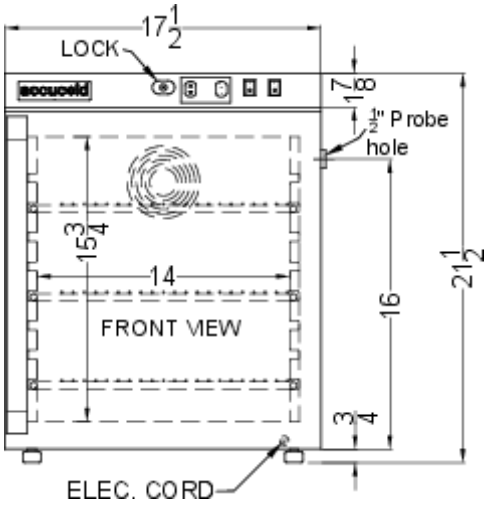

ACCUCOLD DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799
info@accucold.com **www.accucold.com**