

DELANCEY™
SINGLE CONTROL BAR SINK FAUCET
WITH PULL-DOWN SPRAY

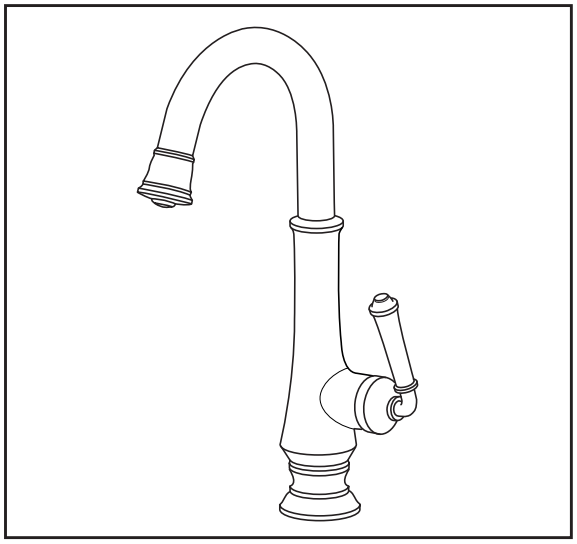

MODEL NUMBER:

❑ **4279410 Pull-Down Faucet**

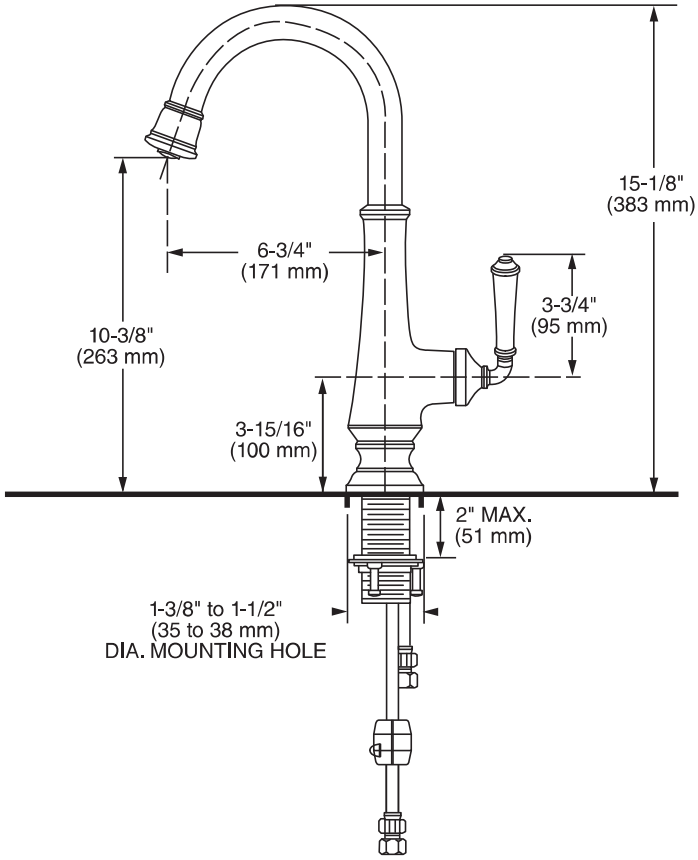

GENERAL DESCRIPTION:

Metal body and handle with brass swivel spout and pull-down spray. Nylon braided pull out hose complete with two integral check valves. Washerless 35 mm ceramic disc valve cartridge. 28-3/4" long braided flexible supply hoses with 3/8" compression connections. Mounting shank with brass fixation ring. 1.5 gpm/5.7 L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Metal Construction: Quality materials for durability & long life.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Pull-Down Spray Head: Single function pull-down spray head.

Integral Check Valves: Prevents back flow.

SUGGESTED SPECIFICATION

Single control kitchen faucet shall feature a metal body with brass pull-down spray. Shall also feature washerless ceramic disc valve cartridge, flexible braided supply hoses and two integral check valves. Fitting shall be American Standard Model # 4279410.___.


© 2023 AS America Inc.

DELANCEY™
SINGLE CONTROL BAR SINK FAUCET
WITH PULL-DOWN SPRAY

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
CSA B125.1
NSF/ANSI/CAN 61: Q<1
NSF/ANSI/CAN 372

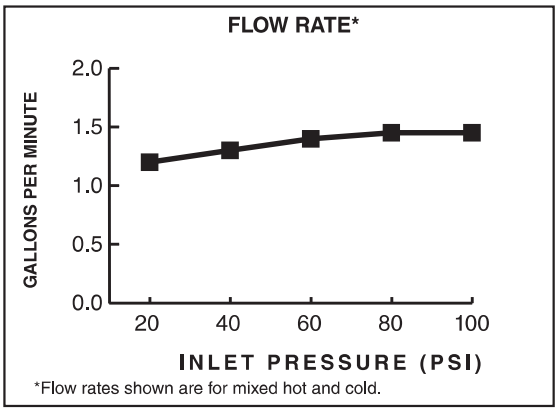

1.5 gpm/5.7 L/min. FLOW RATE

Product Number	Description	Finish Options				
		Polished Chrome	PVD Polished Nickel	PVD Stainless Steel	Legacy Bronze	Brushed Cool Sunrise
		002	013	075	278	GN0
4279410	Pull-Down Kitchen Faucet	✓	✓	✓	✓	✓

ADA Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

© 2023 AS America Inc.