
2-HANDLE THERMOSTATIC ROUGH VALVE WITH VOLUME CONTROL

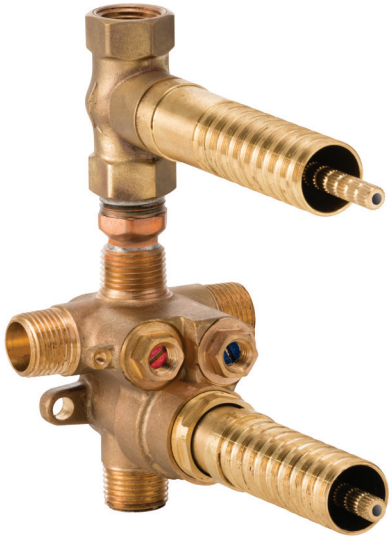


- Ceramic disc valve cartridge
- Forged brass valve body with built-in check stops
- **1** -½" volume control
- ½" Wax thermostatic unit permits shuttle valve to move between the hot and cold seats to maintain the preselected constant water temperature
- ½" NPT Inlets/Outlets
- Includes Adjustable Hot Limit Safety Stop
- Maximum temperature limit is 120˚F

CODES AND STANDARDS
Meets or Exceeds ASME A112.18.1/CSA B125.1/ASSE 1016

DESCRIPTION
2-handle Thermostatic Rough Valve with Volume Control

PRODUCT NUMBER
D35005511.191

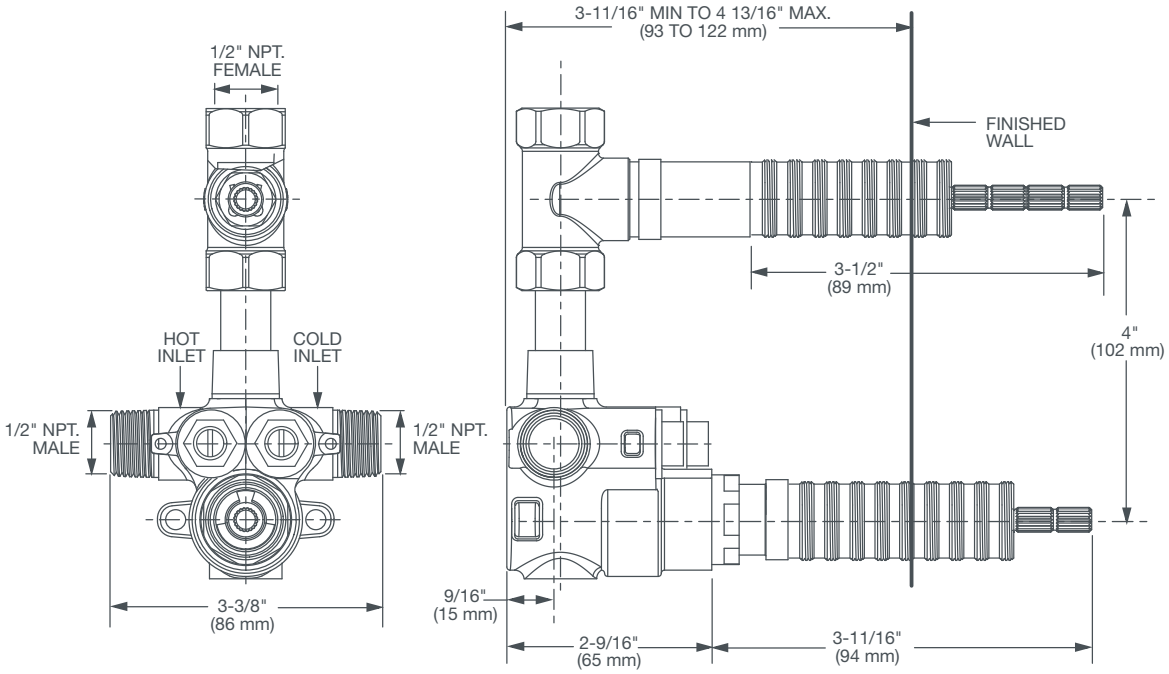

IMPORTANT: These measurements are subject to change or cancellation.

No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL

©2017 AS America Inc.