

MDE/MDG17PD

MAYTAG® COMMERCIAL
SUPER-CAPACITY DRYER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



FOR YOUR CUSTOMERS:

- Extra-Large 7.4 cu. ft. Capacity
- Easy-To-Use One-Touch Cycle Selection
- High Airflow For Better Clothes Care
- Time Remaining Display
- Optional Top-Off

FOR YOUR OPERATION:

- TurboVent™ Technology—Better Performance On Long Vents
- 4-Way Venting—Right or Left Side, Back or Both
- Advanced Computer Trac® Controls Allow For Easy Programming
- Front Access For Easier Self Service
- Accu Trac® Audit System With Two-Way Data Communication
- Large-Capacity Metal Mesh Lint Filter
- Debit Card Compatibility
- Dual Coin-Drop Option
- Reversible Side-Swing Door

BUILT-TO-LAST™ FEATURES:

- Premium Porcelain-Enamel Top
- Four Roller Suspension With Permanently Lubricated Bearings
- Blower Guard Reduces Service Calls
- High Security Vault
- 5-Year Limited Warranty—All Parts Covered

LAUNDRY SOLUTIONS
YOU CAN *DEPEND ON.*

FASTER DRYING WITH
TURBOVENT™ TECHNOLOGY

visit maytagcommerciallaundry.com
or call 800-662-3587



OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.




MDE/MDG17PD MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

Maytag® Super-Capacity Dryer MICROPROCESSOR COIN-DROP

DRYER SPECIFICATIONS	
MODEL	MDE/MDG17PD
MOTOR	
Single-phase, thermoprotected against overload, auto-reset	•
HP (kw)	.33 (.25)
CAPACITY	
Cu. ft. (liters)	7.4 (209.5)
AIRFLOW	
Gas models — cfm (cmm)	230 (6.5)
Electric models — cfm (cmm)	215 (6.1)
TUMBLE SPEED	
RPM	50 ± 1
ELECTRICAL REQUIREMENTS	
MDE model — voltage	240V/60Hz*
MDG model — voltage	120V/60Hz
BREAKER/FUSE REQUIREMENTS	
MDE model — amps	30
MDG model — amps	15
HEATER ELEMENT RATING	
MDE model — watts	5,600
EXHAUST DUCT DIAMETER	
In. (mm)	4 (101.6)**
ELECTRONIC BURNER IGNITION	
MDG model	•
GAS RATING	
MDG model — BTU/hr. (kcal/hr.)	24,000 (6,048)
MDS export model — BTU/hr. (kcal/hr.)	20,000 (5,040)
GAS INLET	
MDG model — in.	¾ N.P.T.
AUTOMATIC PRESSURE REGULATOR	
MDG model	•
ADJUSTABLE LEVELING LEGS	•
APPROXIMATE WEIGHT	
Crated — lbs. (kg)	154 (68.6)
Uncrated — lbs. (kg)	140 (63.5)
DIMENSIONS	
Width — in. (mm)	27 (686)
Depth — in. (mm)	29.25 (743)
Height — in. (mm)	43.25 (1099)***

*208-Volt electric element kit available.
 **Use 4" (101.6 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, non-metal or combustible duct.
 ***Height at top of metercase.
 See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

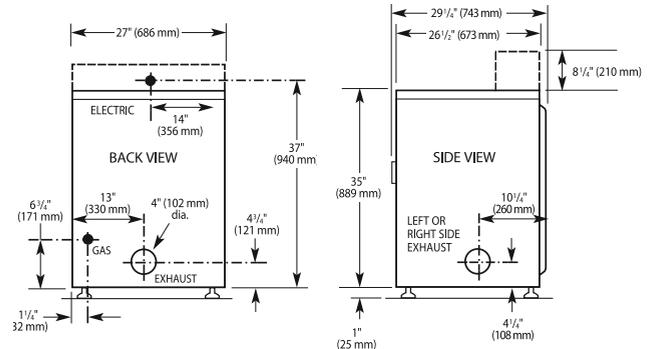

MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	135 ft. (41.2 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.3 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28.0 m)

Flexible Metal Vent

	Flexible Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	76 ft. (23.2 m)	62 ft. (18.9 m)
1	71 ft. (21.6 m)	57 ft. (17.4 m)
2	67 ft. (20.4 m)	53 ft. (16.2 m)
3	65 ft. (19.8 m)	51 ft. (15.6 m)
4	63 ft. (19.2 m)	49 ft. (14.9 m)



NEW YORK CITY M.E.A.



5-YEAR LIMITED WARRANTY ALL PARTS COVERED

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.