


30 in. Under Cabinet Range Hood

SHN3033MS

- 30 in. Stainless Steel Hood
- 2-Speed/Max 350 CFM Blower
- LED Lighting
- Baffle Grease Filters
- Convertible To Recirculation

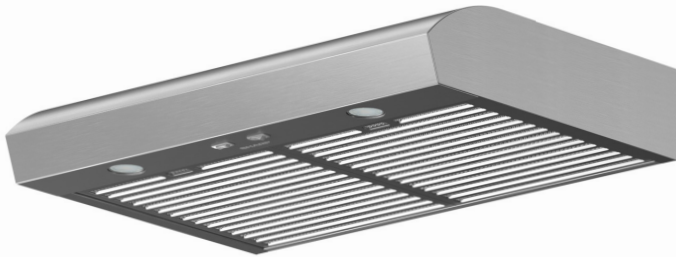

STYLE & DESIGN

Finish	Stainless Steel
Width	30"
Type of Control	Rocker Switch

FEATURES

Speed Levels	2 Levels
Max. Blower CFM*	350 CFM
Grease Filters	Aluminum Baffle Filter
	Dishwasher safe
Lighting	2 LED Lights
	200 Lumen, 3000K
Light Levels	On/Off
Rectangular Duct	Included (3-1/4" x 10")
Recirculation	Non-ducted filters sold separately

MOUNTING HEIGHT

	Minimum 18" from cooktop to hood for electrical range
	Minimum 26" from cooktop to bottom of hood for gas range

ADDITIONAL SPECIFICATIONS

AC Input	120V, 60Hz, 0.8 Amps
Safety Regulation	ETL
Electrical Connection	Direct Wire
HVI Certified	Yes

OPTIONAL ACCESSORIES

Range Hood Electric Cord	SKRH36PWC
7" Round Damper	SKRH07DMP
Range Hood Charcoal Filters	SKRH30CFL

DIMENSIONS & WEIGHT (IN./LBS.) (W X H X D)

Product Dimensions	29-15/16" x 5-1/8" x 20-1/16"
Shipping Dimensions	33-5/8" x 8-1/4" x 23-1/2"
Product Weight/Shipping Weight	19.18/25.9 lbs


WARRANTY/UPC

Parts	1 Year
Labor	1 Year
UPC	074000622876

*Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified.


PRODUCT DIMENSIONS

The following are measurements only. Do not use to install the wall mount chimney range hood. For detailed installation instructions, please refer to the installation manual.

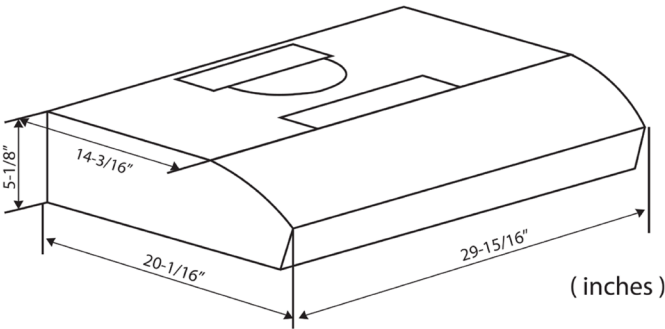

HVI PERFORMANCE						
Duct Orientation	Damper	Sones		CFM		
		Normal	High	Normal	High 0.25 in.w.g.	High 0.1 in.w.g.
3.25" x 10" vertical	Included	1.5	6.0	120	130	220
3.25" x 10" horizontal	Included	2.0	6.5	100	150	220
7" round vertical ¹	Sold Separately	2.0	6.0	110	100	200

7 in. adapter plate included ¹

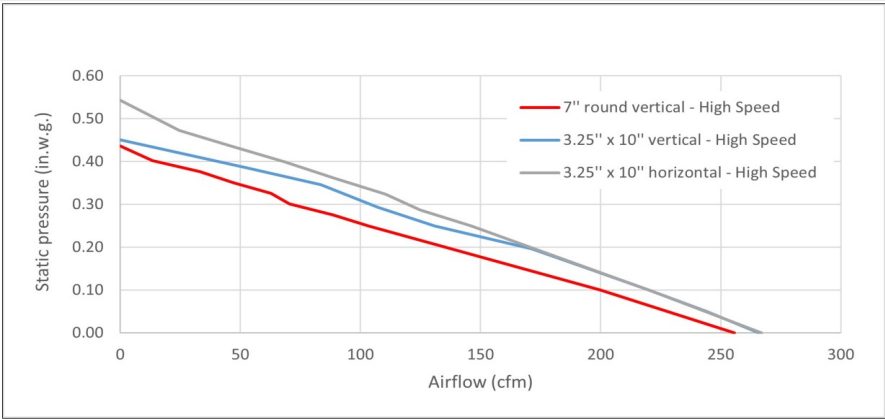

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements. 4508521

PLACEMENT GUIDE

