

4-Door French Door Refrigerator

- NEW Mini Craft Ice
- Dual Ice Makers with Craft Ice
- Full-Convert Drawer
- Soft Closing Door
- LED Back Wall Lighting
- Smart Inverter
- Multi Air Flow Cooling
- Door Cooling
- PrintProof Stainless Steel
- ThinQ
- Water Filter: LT1000P

KEY FEATURES



PRODUCT FEATURES

AVAILABLE COLORS

SMUDGE RESISTANT STAINLESS



SUMMARY		Dispenser		Ice & Water	Hidden Hinges		Yes
Refrigerator (cu.ft.)	17.0	No. of In-door Ice Maker		1	Insulation		Low GWP and Zero ODP Blowing Agent
Full Convert Drawer	3.2	In-door Ice Maker Ice Type		Mini Craft Ice®/ Crushed	DIMENSIONS/CLEARANCES/WEIGHTS		
Freezer (cu.ft.)	8.4	In-door Ice maker Daily production (lbs)		3.0 / 3.3 (Ice Plus) lbs.	Total (WxHxD)		35 3/4" x 70 3/8" x 34 3/8"
Total Capacity (cu.ft.)	28.6	In-door Ice Storage Capacity		3.0 lbs	Width		35 3/4"
ENERGY		No. Freezer Ice Maker		1	Height (Top of Hinge or Door cap Décor)		70 1/4"
ENERGY STAR® Certified	Yes	Freezer Ice Maker Ice Type		Craft Ice®	Width (Door Open 90° without Handle)		40 1/2"
Energy Consumption (kWh/Year)	785	Freezer Ice maker Daily production (lbs)		1.5 / 1.7 (Ice Plus) lbs.	Case Edge Clearance (Door Fully Open)		21" (R) 9 5/8" (L) 11 3/8"
REFRIGERATOR		Freezer Ice Storage Capacity		3.0 lbs.	Width (Door Fully Open without Handle)		56 3/4"
No. of Shelves	4 Split (1 Folding)	Ice Plus		Yes	Door Edge Clearance without Handle		2 1/4"
Shelf Construction	Spill Protector Tempered Glass	Filteration System		1 Stage	Height to Top of Case		68 7/8"
Shelf Trim	White décor	Filter		LT1000P	Height (Floor to Top of Freezer Door)		23 5/8"
No. of Crisper Bins	2	COOLING					
Light	Yes	Compressor Type		Smart Inverter Compressor	Depth without Door		30 1/8"
Light (Back Wall LED)	Yes	Refrigerant		R600a / 84g / 2.96oz	Depth without Handles		34 3/8"
REFRIGERATOR DOOR		Evaporator		1	Depth (to Hinge Cover)		30"
No. of Door Bins (left door)	3	Multi Air Flow Cooling		Yes	Depth (Total with Door Open)		48 1/2"
No. of Door Bins (right door)	3	Door Cooling		Yes	Depth (Draw Open Fully without Handle)		55 3/8"
Door Shape	Flat	Temperature Sensors		3	Installation Clearance		Sides 1/8", Top 1", Back 2"
Handle Type	Pocket	DISPLAY					
Full-Convert Drawer		Display Type		Smooth Touch Control / White LED	Carton Dimensions (WxHxD)		38" x 73" x 35"
Divider	Yes	Temperature Control		Electronic/ Digital	Weight (Unit/Carton)		351 lbs / 373 lbs
Temperature Range (°F)	41/ 37/ 33/ 29/ Freezer	Door Alarm		Yes	LIMITED WARRANTY		
Handle Type	Pocket Handle	Child Lock		Yes	Parts & Labor		1 Year
Light	LED Lighting	Smart Diagnosis		Yes	Sealed System (Parts only)		7 Years
FREEZER		Auto Closing Door Hinge		Yes	Compressor (Parts only)		10 Years
Door Type	Pull Drawer	Wi-Fi Enabled		Yes	UPC CODES		
Handle Type	Pocket Handle	ThinQ®		Yes	LF29S9730S		195174122860
Drawers / Shelves	2-Tier ogarnization	ThinQ® Care		Yes			
Freezer Light Upper	LED Lighting	Sabbath Mode		Yes			
ICE & WATER SYSTEM		ADA Compliant		Yes			
		MATERIALS & FINISH					

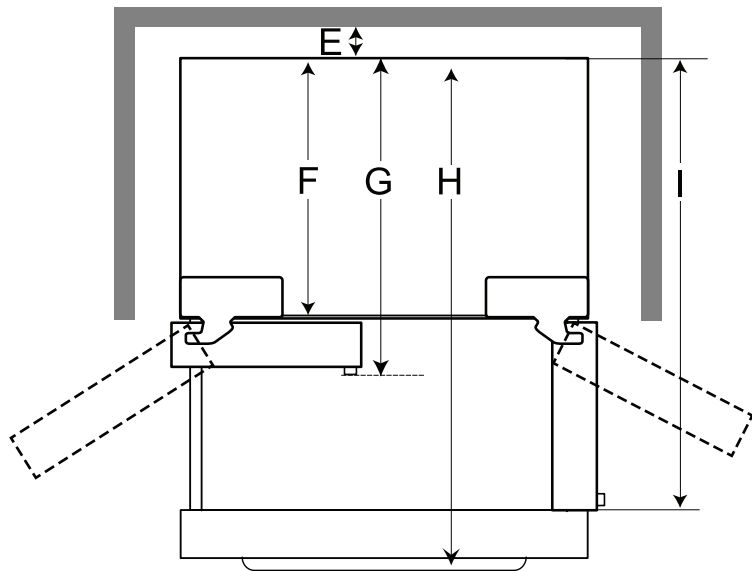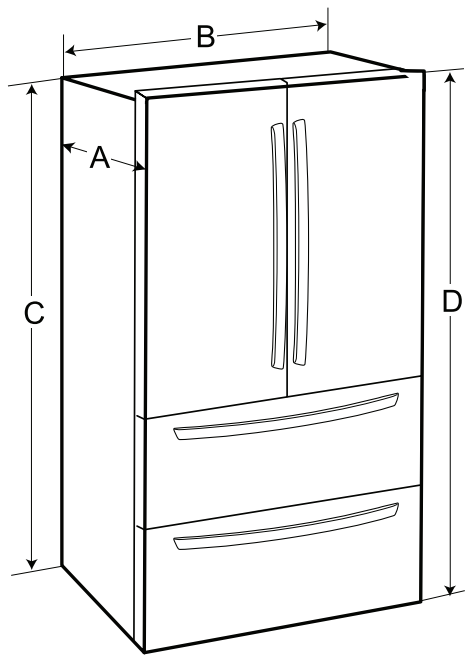

DIMENSION / CLEARANCES

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/ Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

DIMENSIONS		
A	Depth without Handle	34 3/8" (874mm)
B	Width	35 3/4" (908 mm)
C	Height to Top of Case	68 7/8" (1750 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)
F	Depth without Door	30 1/8" (764 mm)
G	Depth with Door	34 3/8" (874mm)
H	Depth (Total with Freezer Drawer Open)	55 3/8" (1406 mm)
I	Depth (Total with Door Open 90°)	48 7/8" (1240 mm)
	Length of Power Cord	104' (2650mm)

LEVELING THE REFRIGERATOR

The refrigerator has two front leveling legs. Adjust the legs to alter the tilt from front-to-back or sideto side.
If the refrigerator seems unsteady or the doors do not close easily, adjust the refrigerator's tilt, using the instructions below:

1. Turn the leveling leg to the left to raise that side of the refrigerator or to the right to lower it. It may take several turns of the leveling leg to adjust the tilt of the refrigerator.
2. Open both doors, and check to make sure that they close easily. If the doors do not close easily, tilt the refrigerator slightly more to the rear by turning both leveling legs to the left. It may take several more turns, and be sure to turn both leveling legs the same amount.

NOTE
• A flare nut wrench works best, but an open-end wrench will suffice. Do not over-tighten.

