SUMMIT

SBC682PNRTWIN



33.63" x 23.75" x 24.25" (H x W x D)

24" wide built-in indoor/outdoor full-sized kegerator with panel-ready door, stainless steel exterior, and complete commercial grade twin tap kit to serve from two 1/6 kegs

Highlights:

Meets residential guidelines for home wet bars and similar spaces

Designed for built-in installation under the counter

Customizable door accepts full overlay panels for a seamless look that can blend into cabinetry

Product Features:

Large capacity kegerator	5.6 cu.ft. interior can accept a full half barrel keg, two slim quarter kegs, or up to three sixth barrel or Cornelius style kegs
Built-in capable	Front-breathing design allows fully recessed installation under counters
Panel-ready door	Extended hinging allows you to install your own panel overlay on the door, creating a custom look to complement or blend into your own cabinetry (panel size: 29 3/4" H x 23 5/16" W at a 3/4" thickness)
Indoor/Outdoor compatible	Weatherproof construction for safe use in the outdoors
Durable design	Solid 304 grade stainless steel construction ensures long-lasting durability
Complete tap kit	Includes a 5 lb. CO2 tank and regulator, dual tap draft arm, Sankey American tap, connection hardware, and cleaning kit
Twin tap system	Twin draft tower allows you to serve from two slim quarter kegs
Automatic defrost	Reduced user maintenance with auto defrost operation
Digital thermostat	Electronic controls ensure easy temperature management, with an external readout in Celsius or Fahrenheit


SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**


SUMMIT

SBC682PNRTWIN Specifications:

Overview	
Height of Cabinet	33.63" (85 cm)
Width	23.75" (60 cm)
Depth	24.25" (62 cm)
Depth with door at 90°	46.75" (119 cm)
Capacity	5.6 cu.ft. (159 L)
Defrost Type	Automatic
Door	Panel-Ready
Cabinet	Stainless Steel
US Electrical Safety	ETL
Canadian Electrical Safety	ETL-C
Sanitation	ETL-S
Energy Usage/Year	305.0kWh/year
Amps	1.25
Voltage/Frequency	115 V AC/60 Hz
Weight	120.0 lbs. (54 kg)
Shipping Weight	135.0 lbs. (61 kg)
Parts & Labor Warranty	1 Year
Compressor Warranty	5 Years
UPC	761101083964
Kegerator	
Door Swing	RHD
Reversible	Factory Reversible
Tap Kit	Yes
Height with Tap	51.5" (131 cm)
Number of Taps	2
Adjustable Shelves	Yes
Shelf Type	Chrome
Shelf Qty	2
Thermostat Type	Digital
Fan Type	Interior
Refrigerant	R600a
Refrigerant Amount	1.06 oz.
High Side PSI	150.0
Low Side PSI	50.0
Inter Height	26.75" (68 cm)

Interior Width	20.0" (51 cm)
Interior Depth	19.0" (48 cm)
Level Legs Qty	4
Wheel Qty	4
Temperature Range	34°F to 68°F (1°C to 20°C)
Sound Level	34.0 db

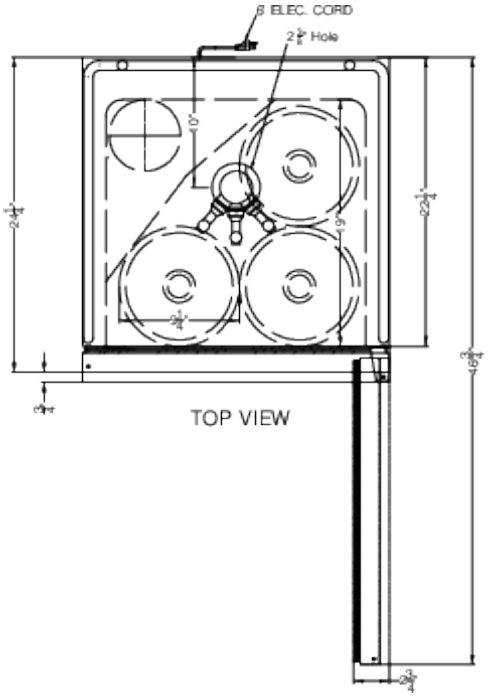

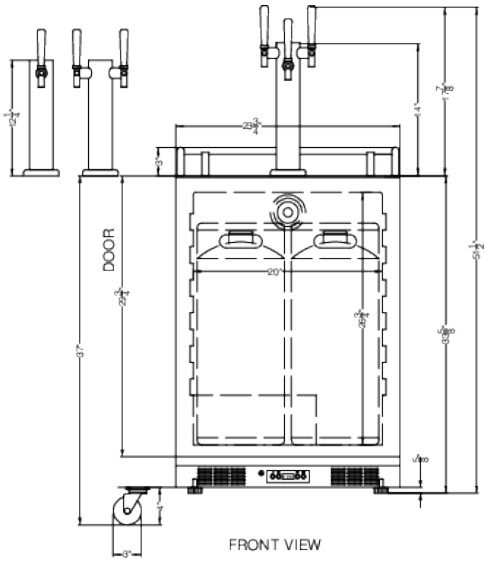

SUMMIT APPLIANCE DIVISION, FELIX STORCH, INC. | ISO 9001:2015 Certified
770 Garrison Avenue Bronx, NY 10474 USA **TEL** 718-893-3900 **FAX** 844-478-8799 info@summitappliance.com **www.summitappliance.com**