

UTTERMOST

ASSEMBLY INSTRUCTIONS


21660

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Installation Steps

1. Turn power off at fuse or circuit box before starting installation process.
2. Carefully unpack your new fixture and lay out all the parts on a clear surface.
3. Secure the Square frame-1 (I) to the Stem (L) with the four Lock balls (M) as shown. Do not fully tighten.
4. Secure the Square frame-2 (N) to the Stem (L) with the four Lock balls (M) as shown. Do not fully tighten.
5. After installing the four Stems (L), if the upper and lower frames are misaligned and the light fixture is tilted, adjust the light fixture to a level position first, then tighten all the Lock balls (M) with a flathead screwdriver (not included).
6. Secure the Square frame-1 (I) to the Fixture body (J) with the Screws (H) as shown, then tighten with a flathead screwdriver until snug.
7. Choose desired hanging length for the light fixture.
8. Adjust the Chain (G) & wire to the desired length remove extra links and extra wire as needed.
9. Thread wire through chain (G).
10. Connect one end of the Chain (G) to the Fixture body (J) with one Quick Link (F).
11. Place the Canopy lock ring (E) and the Canopy (D) over the Chain (G).
12. Connect the other end of the Chain (G) to the Canopy chain loop (C) with the remaining Quick Link (F).
13. Thread the Green ground screw (B) into the hole of the Crossbar assembly (A). Secure the Crossbar assembly (A) to the outlet box with the Outlet box screws (c).
14. Make Wire connections with Wire Connector (a):
 - The Smooth side of Wire from Fixture to Black Wire from power source.
 - The Ribbed side of Wire from Fixture to White Wire from power source.
 - Attach the Ground Wire and house ground wire to the Crossbar assembly (A) with the Green ground screw (B).

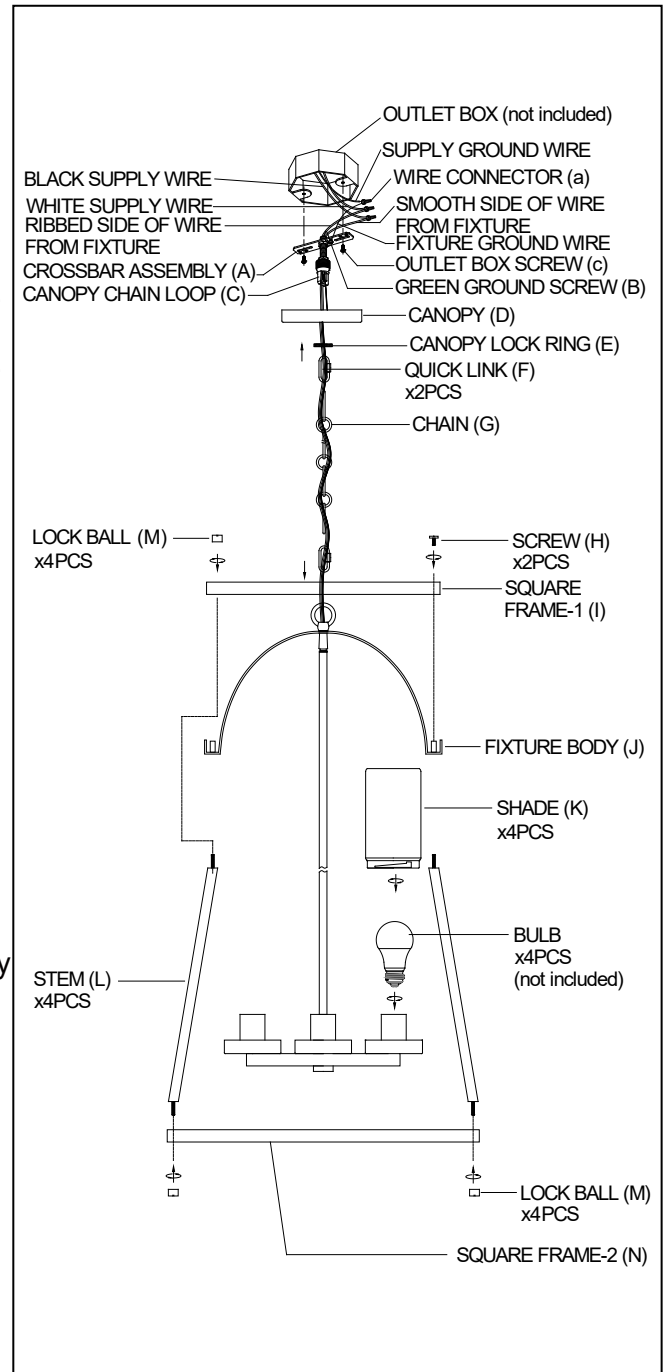

UTTERMOST

ASSEMBLY INSTRUCTIONS

21660

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF WHILE POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

We suggest a licensed professional electrician for installation

Installation Steps

15. Carefully tuck wires back into the outlet box.
16. Attach the Canopy (D) over the Canopy chain loop (C). Secure with Canopy lock ring (E).
17. Install the light bulbs (Not Supplied) in accordance with the fixture's specifications. **DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**
18. Align the slots on the Shade (K) to the studs on the cap on the fixture body (J) and twist the Shade (K) until it is secure.