Wall Mount IR Gateway

The C2N-IRGW-1G IR Gateway is a 1-way infrared receiver for Crestron IR

wireless handheld remotes and touchpanels. It is also compatible with

third-party IR remotes utilizing the RC5 command set.

The C2N-IRGW-1G is designed to fit in a 1-gang electrical box using a

decorator style faceplate (not included). Its entire visible face consists

of a smoked plastic lens providing a neutral appearance suitable

with any color scheme. The C2N-IRGW-1G is a Cresnet device compatible with

any 2-Series control system.



IR Wireless

IR Frequency: 36 to 38 kHz IR Formats: Crestron format, RC5

Range: Up to 50 ft line of sight (typical), dependent upon angle, obstructions, IR interference, and IR remote signal strength

Connectors

NET: 4-pin 3.5mm detachable terminal block;

LED Indicators

(1 red) Indicates IR signal reception, Cresnet network communication,

and setup/update functions

Controls

(1) Recessed miniature pushbutton for setup

Power Requirements

Cresnet Power Usage: 1 Watt (0.042 Amps @ 24 Volts DC)

Environmental

Temperature: 41° to 104°F (5° to 40°C)



an electrical box using decorator style faceplate (not included)

Dimensions (Without Faceplate)

Height: 4.13 in (10.48 cm) Width: 1.75 in (4.45 cm) Depth: 1.37 in (3.45 cm)

Weight

2.4 oz (68.0 g)

ACCESSORIES

CRESNET-HP-NP-TL-SP1000:

CRESNET-NP-BK-B500:

CRESNET-P-BK-SP500:

CRESNET-HP-NP-TL-SP500:

CRESNET-NP-OR-B500:

CRESNET-NP-TL-B250:

CRESNET-NP-TL-B500:

CRESNET-NP-TL-SP1000:

CRESNET-NP-TL-SP500:

CRESNET-P-OR-SP500:

CRESNET-P-TL-SP1000:



Wall Mount IR Gateway

CRESNET-P-TL-SP500:


FP-G1-A-S:

FP-G1-B-S:

FP-G1-W-S:



Wall Mount IR Gateway

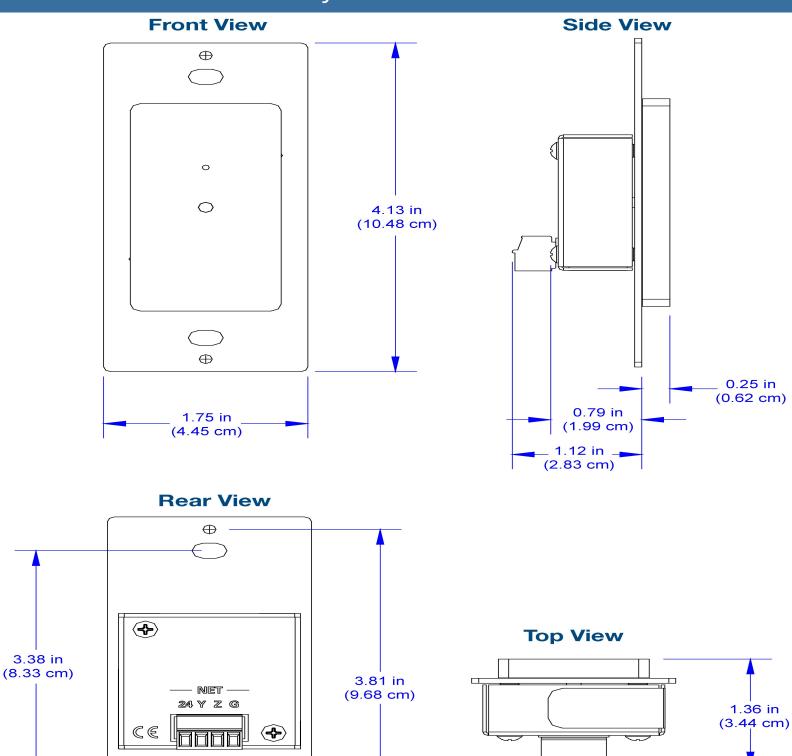

 \oplus

Wall Mount IR Gateway

