

### 36" REFRIGERATOR WITH BOTTOM FREEZER & STAINLESS SOLID DOOR

# TR-36RBF-R/L-SS-A

TR-36RBF-R-SS-A (Right hinged)

TR-36RBF-L-SS-A (Left hinged)

## **FEATURES**

- Industry exclusive, 300-series stainless steel interior and exterior.
- All stainless steel, beautifully crafted proud hinges pass True's rigorous one million door opening test.
- Ramp-up, showcase interior LED lighting provides amazing illumination throughout.
- Balanced refrigeration system with cascade airflow that enables even temperature throughout to keep food fresh.
- Built-in Ice Maker produces up to 3lbs./day of prism shaped ice with 5 lbs. storage capacity.
- Dual evaporator and dual compressor enable dedicated cooling systems for each zone.
- Environmentally friendly, r600a hydrocarbon refrigerant that improves performance and efficiency.

### ORGANIZATION

### Refrigerator

- 4 adjustable/removable stainless steel encapsulated glass half-shelves.
- 2 adjustable/removable door bins that allow for additional storage/organization.
- 1 adjustable/ removable stainless steel encapsulated glass full-width shelf.
- 1 fixed stainless steel encapsulated full-width glass shelf.
- 1 full-extension/full-width drawer with 2 removable dividers.
- 2 half-width, deep drawers with 2 removable dividers, ideal for produce storage.

### Freezer

- 2 tiered drawers with nested pull-out drawer and top shelf.
- · Built-in Ice Maker.

### **BUILD YOUR TRUE**

Customize your True with a variety of finish and hardware options at **true-residential.com/custom**.













R-36RBF-R-SS-A


## **SPECIFICATIONS**


Dimensions (w x h x d)	36" x 84" x 24"	
Cutout Dimensions (w x h x d) Flush Opening Standard Opening	36¼" x 84¼" x 26" 35¾" x 84" x 24"	
Total Capacity (cu. ft.) Capacity (cu. ft.) — Refrigerator Capacity (cu. ft.) — Freezer	22.6 17.5 5.1	
Temperature. Range — Refrigerator Temperature. Range — Freezer	33°F – 42 °F -4°F – 4°F	
Water Supply	1/4" O.D. braided stainless steel or PEX tubing (1/4" O.D. lines and fittings not included). <b>Note:</b> Copper line is not recommended.	
Flow Rate (gpm/lpm)	0.5 / 1.89	
Operating Pressure psi (kPa)	30 (207) — 100 (689)	
Incoming Water Temperature	33 – 100°F (0.6 – 38°C)	
Weight (lbs.)	720	
Voltage	115/60/1 115/60/1 NEMA-5-15R	
Amps	1.8	
Annual Energy Consumption (kwh)	568	
Refrigerant Type	r600a	
Power Cord Length (ft.)	9	
Energy Star Rated	Yes	

2001 East Terra Lane I O'Fallon, MO 63366-4434 | p 636.240.2400 | f 636.272.7546 | true-residential.com | info@true-residential.co



# TR-36RBF-R/L-SS-A






# **OPENING DIMENSIONS**

### FLUSH OPENING

WIDTH	HEIGHT	DEPTH				
361/4"	84¼"	26"				
STANDARD OPENING						
WIDTH						
WIDTH	HEIGHT	DEPTH				

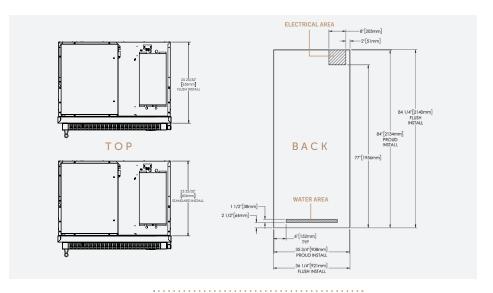

### MODEL OPTIONS

MODEL		FINISH
	MODEL	LINI2U
	TR-36RBF-R-SS-A	Stainless solid door right-hinged
	TR-36RBF-L-SS-A	Stainless solid door left-hinged

# **ACCESSORIES (OPTIONAL)**

Joining kit		
Side panel(s)	 	 
90° door stop		
Full size anti-condensation pad	 	 

# WARRANTY

3 year full (parts & labor)

6 year sealed system (parts & labor)

7-12 year (parts only - sealed system on registered products)