

GFDS170GH/175GH

GE® 7.5 cu. ft. capacity frontload gas dryer with Steam and stainless steel drum

Dimensions and Installation Information (in inches)


Gas Dryer Rating	
120V	60Hz, 6A

Exhaust Options: 3-way via rear, left, and bottom.

Circuit Requirements: An individual, properly grounded branch circuit, protected by a 15-20 amp circuit breaker or a time-delay fuse, is required.

Note: Dryer wall outlet must be located within 36" of service cord entry and accessible when dryer is mounted in position.

Installation Information: For complete information, see installation instructions packed with your dryer.

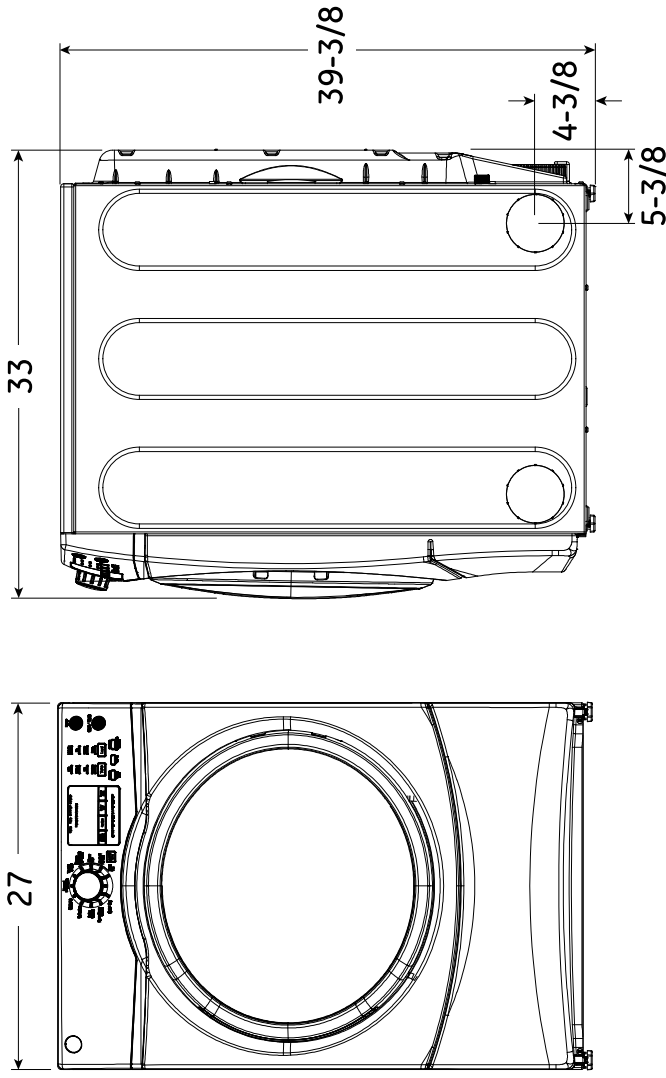

For answers to your Monogram® GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work



GFDS170GH/175GH

GE® 7.5 cu. ft. capacity frontload gas dryer with Steam and stainless steel drum

Special Installation Requirements:

Stacked Installation:

Brackets for stacking dryer over washer are not included with the washer. Order part no. GEFLSTACK or part no. WE25X10018.

Alcove or Closet Installation:

- If your dryer is approved for installation in an alcove or closet, it will be stated on a label on the dryer back.
- The dryer MUST be exhausted to the outside.
- Minimum clearances between dryer cabinet and adjacent walls or other surfaces are: 0" either side, 3" front and rear
- Minimum vertical space from floor to overhead cabinets, ceilings, etc. is 52".
- Closet doors must be louvered or otherwise ventilated and must contain a minimum of 60 sq. in. of open area equally distributed. If this closet contains both a washer and a dryer, doors must contain a minimum of 120 sq. in. of open area equally distributed.
- No other fuel-burning appliance shall be installed in the same closet with a gas dryer.

Bathroom or Bedroom Installation:

- The dryer MUST be exhausted to the outdoors.
- The installation must conform with the local codes, or in the absence of local codes, with the National Electric Code and National Fuel Gas Code, ANSI Z223 for gas dryers.

Minimum Clearance other than Alcove or Closet Installations:

- Minimum clearances to combustible surfaces 0" both sides, 3" rear.


For more information on venting kits and accessories, please call 1-800-GE-CARES.

For answers to your Monogram® GE Profile™ or GE® appliance questions, visit our website at geappliances.com or call GE Answer Center® service, 800.626.2000.



imagination at work


Stacked Dimensions (in inches)

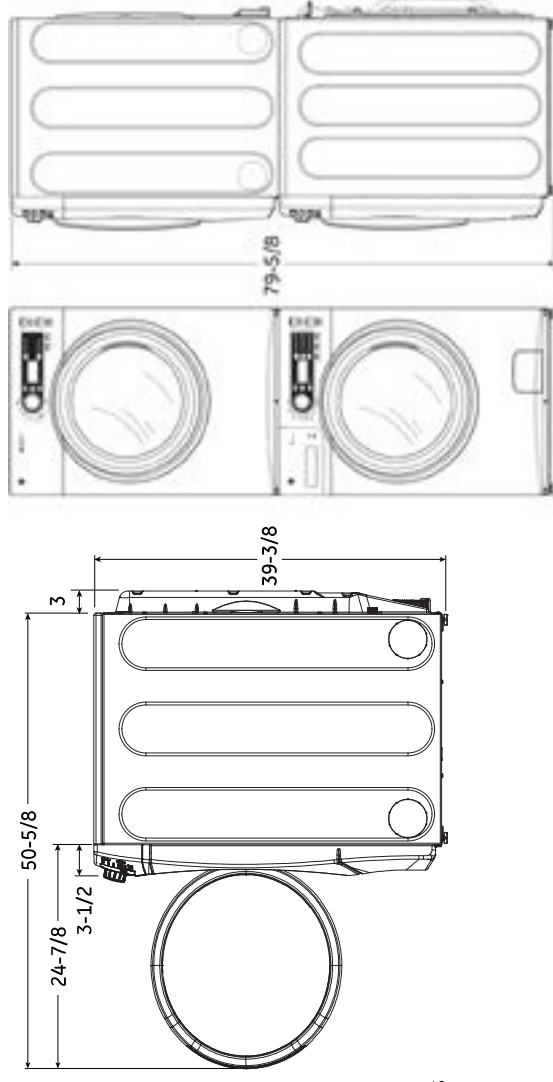

Pedestal Dimensions (in inches)

SBSD137HWW - white

This optional 13" pedestal raises the door opening and height of the washer or dryer. Feet on 13" pedestal allow it to adjust to 13-3/8" height.

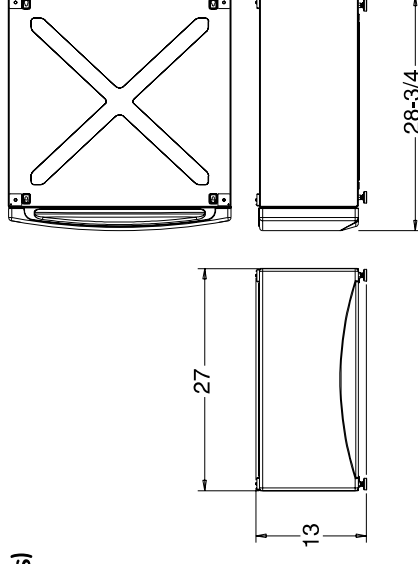

GFDS170GH/175GH

GE® 7.5 cu. ft. capacity frontload gas dryer with Steam and stainless steel drum

Dryer Exhausting Information – Metal Duct Only

For complete information, see installation instructions packed with your dryer.

Ducting Materials: For best performance, this dryer should be vented with 4" diameter all rigid metal exhaust duct. If rigid metal duct cannot be used, then UL-listed flexible metal (semi-rigid) ducting can be used (Kit WX08X10077). In special installations, it may be necessary to connect the dryer to the house vent using a flexible metal (foil-type) duct. A UL-listed flexible metal (foil-type) duct may be used ONLY in installations where rigid metal or flexible metal (semi-rigid) ducting cannot be used AND where a 4" diameter can be maintained throughout the entire length of the transition duct. Please see installation instruction packed with your dryer for complete instructions when using flexible metal (foil type) ducting.

Exhaust Length Calculation:

1. Determine the number of 90° turns needed for your installation. If you exhaust to the side or bottom of dryer, add one turn.
2. The maximum length of 4" rigid (aluminum or galvanized) duct which can be tolerated is shown in the table.

A turn of 45° or less may be ignored. Two 45° turns within the duct length should be treated as a 90° elbow.

A turn over 45° should be treated as a 90° elbow.

Dryers **must** be exhausted to the outside.


Caution: For personal safety do not terminate exhaust into a chimney, under any enclosed house floor (crawl space), or into an attic, since the accumulated lint could create a fire hazard or moisture could cause damage. Never terminate the exhaust into a common duct or plenum with a kitchen exhaust, since the combination of lint and grease could create a fire hazard.

Exhaust ducts should be terminated in a dampered wall cap to prevent back drafts, bird nesting, etc. The wall cap must also be located at least 12" above the ground or any other obstruction with the opening pointed down.


For more information on venting kits and accessories, please call 1-800-GE-CARES.



imagination at work



		Best performance	
Domestic dryer models	Number of 90° turns	Maximum length of 4" dia. rigid metal duct	
		Exhaust hood type	
7.5 cu. ft. capacity models gas dryers		A 4" opening	B 2-1/2" opening
		90 ft.	60 ft.
	0	60 ft.	45 ft.
	1	45 ft.	35 ft.
	2	35 ft.	25 ft.
	3	25 ft.	15 ft.

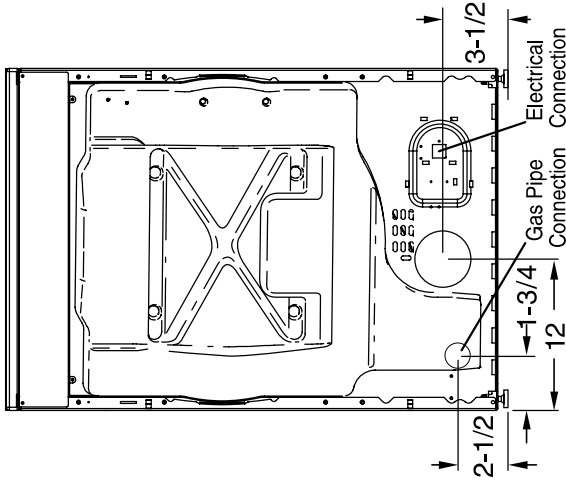

GFDS170GH/175GH


GE® 7.5 cu. ft. capacity frontload gas dryer with Steam and stainless steel drum

Features and Benefits

- Steam Refresh - Rejuvenate lightly worn clothes by getting rid of wrinkles and odors with this convenient setting using the power of steam
- Steam Dewrinkle - Stored or wrinkled clothes come out wrinkle-free with this helpful setting that uses steam to refresh and dry a load of any size
- HE Sensor Dry - Keep your clothes looking and feeling their best. Dual thermistors continually monitor temperature with a sensor bar that measures moisture to prevent over-drying
- Quick Dry - Quickly dries items and small loads for families on the go
- Damp Dry - Allows you set an alert to remove select items for hang-drying or damp ironing
- Stainless steel drum - Resists rust and helps protect clothes
- Delay start - Set the dryer to begin cycles whenever it's convenient for you
- Sanitize - Extends heating cycle time to reduce certain types of bacteria by 99.99%*

*The Sanitize cycle is certified by NSF International to NSF Protocol P9 Sanitization Performance of Residential Clothes Dryers

- Bulky Bedding cycle - Dries larger items, such as comforters, blankets and jackets
- Model GFDS170GHWW - White
- Model GFDS175GHDG - Diamond Gray

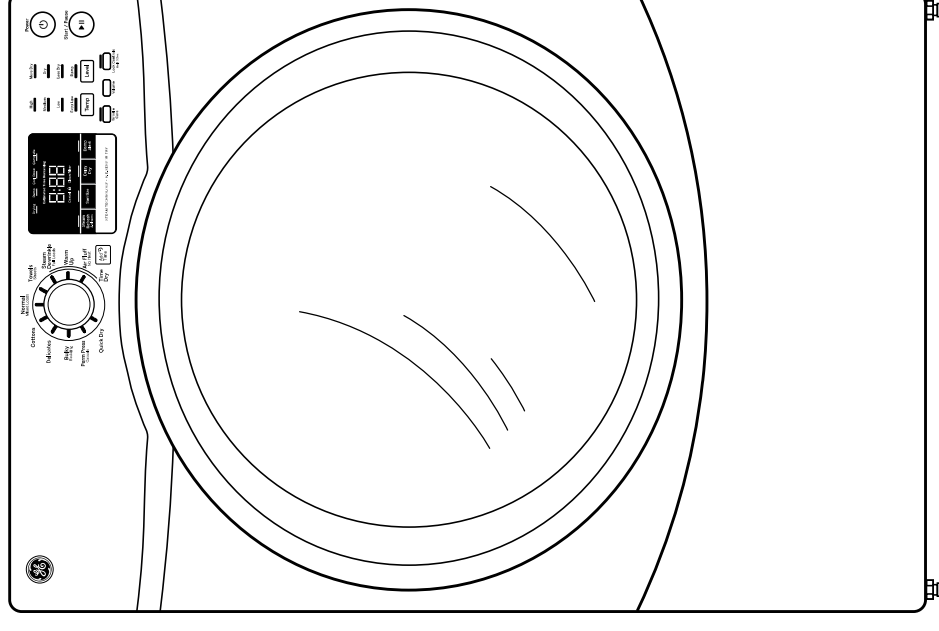

imagination at work