



Color Variants

RW414760
fully integrated, with glass door
Niche width 24" (45.7 cm), Niche height
32" (213.4 cm)

Optional accessories

RA491131
Fully extendable bottle tray in beech
and aluminium
RA492130
Fully extendable shelves in aluminium

Product Variants

RW464760
Wine storage unit 400 series
Niche width 24" (61 cm), Niche height
32" (213.4 cm)
fully integrated, with glass door

RW414760
Wine storage unit 400 series
fully integrated, with glass door
Niche width 24" (45.7 cm), Niche height
32" (213.4 cm)

- Two individual temperature zones, both continuously variable
- Consistant temperatures, adjustable from 40 °F to 64 °F (+5 °C to 18 °C)
- 70 bottle capacity
- Humidity control
- Stainless steel interior
- Fully extendable bottle trays in beech and aluminum
- Presentation light option
- low-vibration operation

Operation

Electronic precision temperature control with digital temperature display.

Technical features

Dynamic cool air distribution.
Automatic defrosting with defrost water evaporation.
Activated charcoal air filter.
Energy-saving vacation mode.
Open-door and malfunction warning system.

Features

Net volume 9.7 cu. ft.
(275 liters)
70 bottle capacity (based on 0.75 liter standard bottles).
10 fully extendable bottle trays, up to four can store magnum bottles.
Space for maximum 14 bottle trays or aluminum shelves
Interior lighting with 3 ceiling spot lights, one of which can be used as a presentation light in the lower temperature zone.
UV-protection.

Consumption data

Energy consumption 1 kwh/24 h.

Planning notes

Flat hinge.
Door hinge right, reversible.
Door opening angle of 115°, optional 90° door stop.
Plan the power outlet and water connection behind the appliance per installation instructions.
Connecting cable 78 3/4" with plug.
Max. door panel weight 147 lb.

Rating

120 V / 60 Hz
Total Amps: 15 A

Product Features

Number of temperature zones
1
Range of temperature (°C)
5-18
Eco Mode
Yes
Carbon Air Filter
No
Presenter Lighting
Yes
Presenter Shelf
Yes
Type of Glass Door
2 glass panels
Number of Adjustable Shelves
0
Number of shelves
10
Bottles per Shelf
5
Door Hinge
Right reversible
Shelf Material - Refrigerator
Reversible Door Hinge
Yes
Lighting
Halogen



Consumption and connection features

UPC code
825225848226
Color / Material housing
Colour.Material door
Panel ready
Not possible
Installation Type
N/A
Silence level (dBA)
43
Watts (W)
92
Current (A)
15
Volts (V)
120
Frequency (Hz)
60
Energy consumption per Year (kWh/a)
winecooler
365.00
Approval certificates
ETL, ETL C
Power cord length (in)
78 3/4"
Plug type
120V-3 prong
Required cutout size (HxWxD) (in)
84" x 18" x 24 3/4"
Appliance Width (in)
17 3/4"
Height (in)
83 3/4 "
Depth (in)
24"
Capacity in 0.75l (bordeaux bottles)
70
Total unit gross capacity (cu. ft.) - AHAM
Product packaging dimensions
(HxWxD) (in)
89.76 x 21.57 x 29.25
Net weight (lbs)
328
Gross weight (lbs)
359
2013-07-02
Page 1

RW414760
Wine storage unit 400 series
fully integrated, with glass door
Niche width 24" (45.7 cm), Niche height
32" (213.4 cm)


2013-07-02
 Page 2

Bottle storage

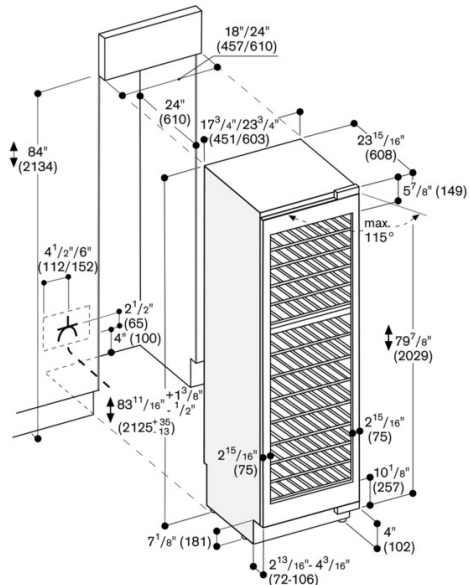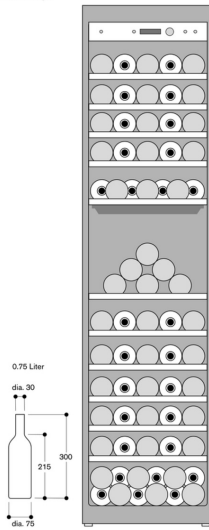

The maximum door front dimensions are designed for a gap dimension of 3 mm.


Wall clearance RB 472/RC/RF/RW

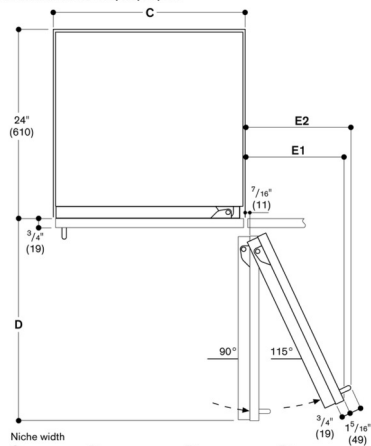

Niche width	C	D	E1	E2
18" (457 mm)	20 1/16" (525 mm)	9 7/16" (235 mm)	10 7/16" (265 mm)	
24" (610 mm)	26 5/16" (677 mm)	11 3/4" (299 mm)	13" (330 mm)	
30" (762 mm)	32 1/16" (830 mm)	14 3/16" (363 mm)	15 5/16" (395 mm)	


The drawing is based on a cabinet panel width of 3/4" (19 mm) and a Gaggenau cabinet handle height of 1 5/16" (49 mm).

Door opening angle

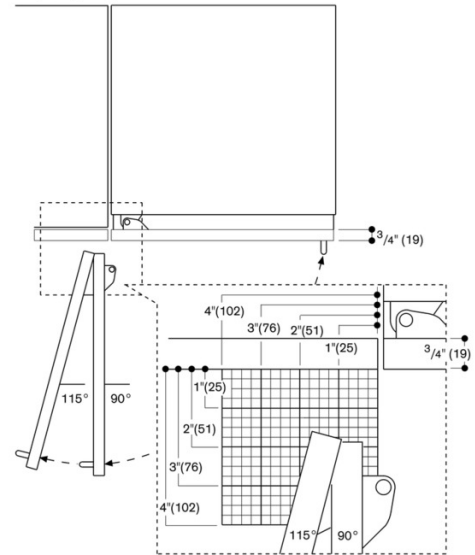

The space required for the hinge and the consequential distance to the adjacent unit and its handle can be seen in the above drawing, depending on the thickness. The drawing assumes a panel thickness of 19 mm.

45.7

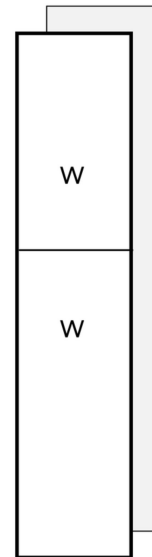

GAGGENAU