

DA 4248 V D Puristic Varia

Island décor hood with energy-efficient LED lighting and backlit controls for easy use.



- Timeless design 47 1/4 (1,198)Inch wide stainless steel ventilation hood
- Unique user convenience Con@ctivity
- Motorized chimney
- Energy-efficient and quiet

EAN: 4002515990162 / material number: 10877250

Construction type	
Island ventilation hood	•
Design	
Color	Stainless steel
Customization possible on request	•
Operating modes	
Recirculated mode	air extraction
Control panel	
Electronic controls	<u> </u>
Light-touch controls	•
Power levels (number excl. Intensive)	3
Intensive setting	
Programmable 'Intensive' switch-off	•
Delayed shutdown for 5 or 15 minutes	•
Programmable grease filter saturation indicator	
Acoustic package	•
Hood in Motion	•
Cleaning convenience	
Easy-to-clean CleanCover hood liner	•
Networking of domestic appliances	
Miele@home	<u>•</u>
WiFiConn@ct	<u> </u>
Automatic function Con@ctivity 2.0 (Zigbee)	•
Filter system	
Number of dishwasher-safe stainless steel grease filters	6
Lighting	
LED ClearView lighting	
Light intensity in Lx	600
Color temperature in K	3,500
Light dimmer function	•
Blower	
Dual-action blower	
AC motor	•
Air throughput with max. duct diameter in vented mode (not for external version)	
Air throughput	Values upon request
Safety	- In the second
Safety shut-off	•
-	



DA 4248 V D Puristic Varia

Island décor hood with energy-efficient LED lighting and backlit controls for easy use.




Technical data	
Overall hood height for vented and external in in.(mm)	29 3/4 (755)
Canopy width in in.(mm)	47 1/4 (1,198)
Height of hood canopy in in.(mm)	2 7/8 (70)
Depth of hood canopy in in.(mm)	27 1/2 (698)
Minimum distance above electric cooktops in in.(mm)	24 1/8 (610)
Minimum height above gas cooktop (max. 12.6 kW total power, burner 4.5 kW) in mm	26 (660)
Net weight in lbs. (kg)	109 (49.0)
Length of electrical wire in ft (m)	0 (0.0)
Hard-wired	•
Total connected load in kW	0.51
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Installation notes	
Vent connection at top	•
Diameter of vent connection in in.(mm)	6 (150)
Telescopic chimney	•
Standard accessories	
Non-return flap	•
Wireless stick Con@ctivity 2.0 for KM	XKS 3000 Z



DA 4248 V D Puristic Varia

Island décor hood with energy-efficient LED lighting and backlit controls for easy use.

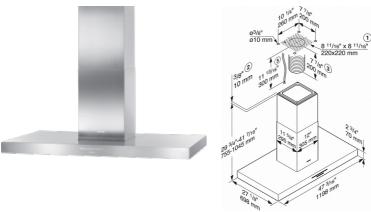

DA 4248 V (Installation drawing) USA

- Installation area/site
 Installation alternatively with spacer frame
 3) A supply lead, and for vented mode flexible vent ducting, must be pre-fitted for the connection in the ceiling to the connection of the cooker hood.