

K-CKTPD Double Cooktop



PRODUCT FEATURES

- Two 19,000 BTU cooktop burners (LP)
- · Safety valves for each burner
- · Natural gas or bulk liquid propane
- · Stainless steel wok grate
- · Battery powered electronic ignition
- For masonry installation or with a 24" Kalamazoo base cabinet, available in Signature and Arcadia Cabinet Series
- · Stainless steel cover included
- · Marine-grade stainless steel available

Overall Width / Installation Width	16 in (407 mm)
Overall Depth / Installation Depth	28.38 in (720 mm)
Overall Height / Counter Height	7 in (179 mm)
Approximate Product Weight	34 lb (15.4 kg)
	Natural Gas: 3/8" male NPT connection. 12 ft. (366 cm) gas hose with external
	regulator and quick disconnect provided. Gas service line to deliver 7 i.w.c. at grill
	location. See BTU information below for pipe sizing.
Gas Requirements	Bulk Propane: 3/8" male NPT connection. 12 ft. (366 cm) gas hose with external
	regulator and quick disconnect provided. Gas service line to deliver 11 i.w.c. at grill
	location. See BTU information below for pipe sizing.
	Propane Cylinder: Not available
Electrical Requirements	1.5V "AAA" battery x 1
Total BTUs	38,000 BTU liquid propane / 33,000 BTU natural gas


Ensure proper gas pipe sizing. Diameter and length of the supply pipe may limit the pressure and BTU delivery.

For outdoor use only. Maintain at least 9 inches (229 mm) of clearance around the sides and back of cooktop. Never place cooktop underneath an overhead combustible surface. For installation in built-in enclosure constructed of non-combustible materials. Do not place cooktop in a location where it is likely to be exposed to a strong wind.

High altitude kit available.



K-CKTPD Double Cooktop

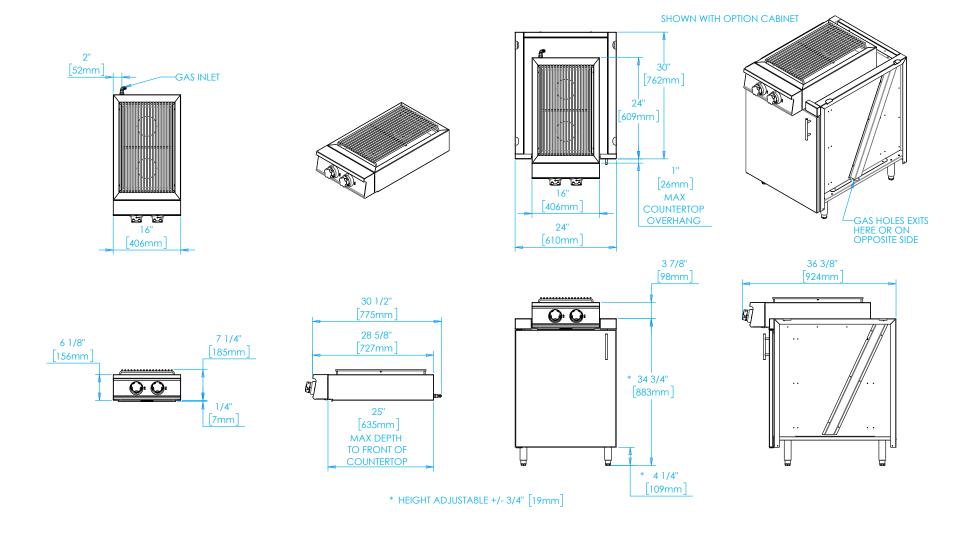



K-CKTPD Double Cooktop

