

18-1/8" Depth, 10" High	MODEL
<ul style="list-style-type: none"> 625± CFM 7" Round Duct 	C2030BPB-SS C2036BPB-SS C2042BPB-SS C2048BPB-SS
<ul style="list-style-type: none"> 750± CFM 8" Round Transition 	C2030BPB-8-SS C2036BPB-8-SS C2042BPB-8-SS C2048BPB-8-SS
<ul style="list-style-type: none"> 840± CFM 10" Round Transition 	C2030BPB-K-SS C2036BPB-K-SS C2042BPB-K-SS C2048BPB-K-SS


FEATURES:

- Variable Controls
- Sones: 1.5 to 4.6
- Filters: Stainless Steel Baffles
- Front Panel Lighting: LED bulbs Included.
- Electrical: 115 AC, 60 Hz, 9 Amps. For proper installation, unit must be hard wired. Suggested use with 15 Amp Circuit.
- Heat Controlled Thermostat, Fire Safety Controlled. Activates at 130 degrees.
- Suggested Distance Codes: 36" above cooking surface.

OPTIONS:

- Flange for the perfect fit.
- Remote wiring,.

NO Performance Warranty over BBQ Grills/Griddles.

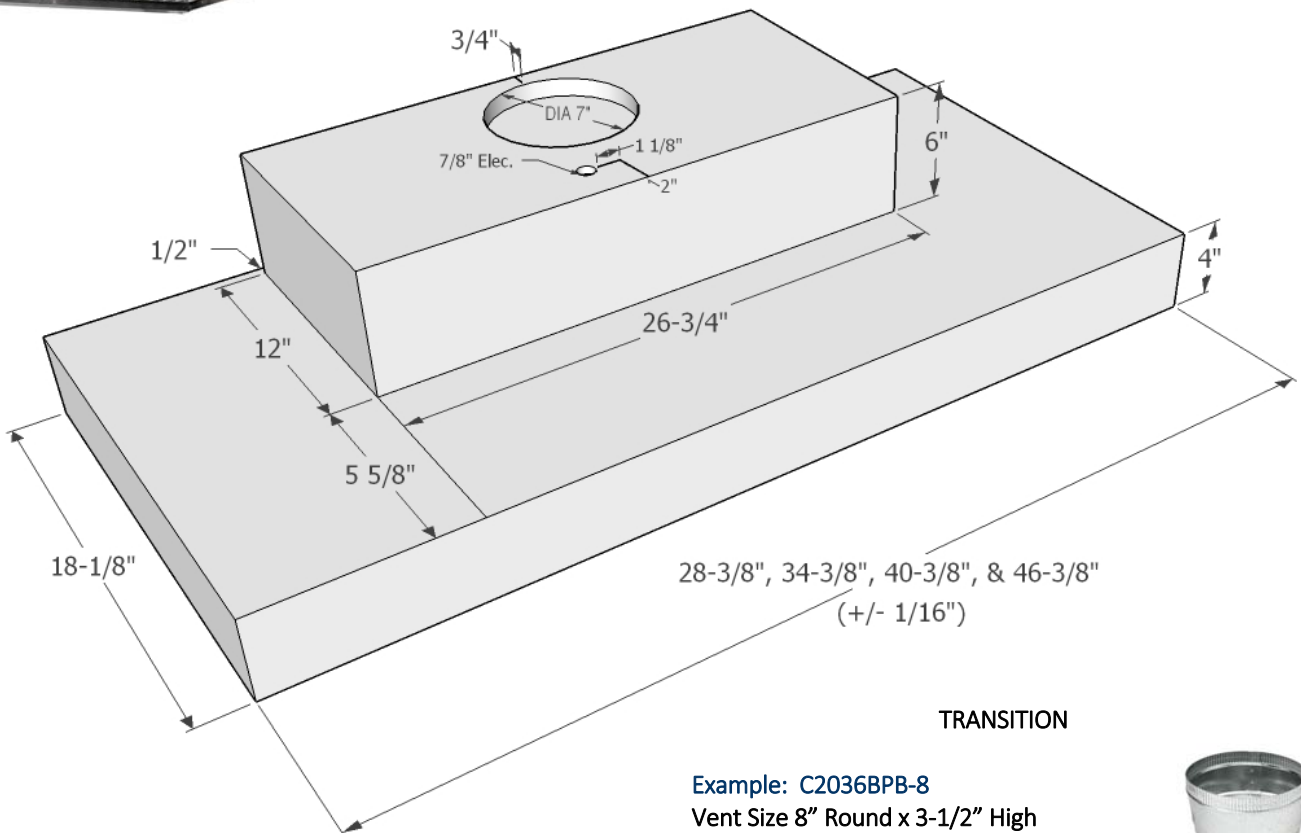

Example: C2036BPB-8
Vent Size 8" Round x 3-1/2" High



Example: C2042BPB-K
Vent Size 10" Round x 7" High



SEVEN YEAR, IN HOME, LIMITED WARRANTY, THE BEST IN THE INDUSTRY!

All dimensions are (+/-) 1/16" and are subject to change. Drawings are not to scale.