## FRIGIDAIRE.



**General Specifications** 

**ENERGY STAR Certified** 

**Performance Certifications and Approvals** 

Annual Energy

Refrigerant Type

Warranty - Labor

Warranty - Parts

13.9 Cu. Ft. Top Freezer Refrigerator

Top Freezer Refrigerator

Available Products: FFHT1425VB, FFHT1425VV, FFHT1425VW

Available Colors: Black, Brushed Steel, White

Version: 08/22

	Produc	ct Specifications	
Refrigerator		Freezer	
Crisper Color	Clear	Automatic Defrost	Yes
Deli Drawer	Yes	Baskets / Bins Color	White
Door Bin Color	White	Shelf Material	Glass
Interior Lighting	LED	Number of Fixed Door Bins	2
Shelf Material	Glass	Number of Adjustable Shelves	1
Number of Fixed Gallon Door Bins	2		
Number of Adjustable Shelves	2	Controls	
Number of Crispers	1	Digital Display	No
Ice Maker Ice Maker	No	Electrical Specifications  Minimum Circuit Required	15 Amps
Ice Maker Ready	Yes	<u> </u>	•
Dimensions and Volume Height With Hinge Height Without Hinge	60 1/2" 59 7/8"	Certifications and Approvals  ADA Compliant  Safety Certifications and Approvals	Yes
Width	27 5/8"	UL Listed	Yes
Width of Cabinet	27 5/8"		
Depth of Cabinet	25 1/4"		
Depth With Door	29 3/8"		
Depth With Door 90° Open	53 5/8"		
Depth With Door and Handle	29 3/8"		
Fresh Food Capacity	10 Cu. Ft.		
Freezer Capacity	3.9 Cu. Ft.		
Total Capacity	13.9 Cu. Ft.		

332 kWh

R-600A

1 Year

1 Year

Yes

13.9 Cu. Ft. Top Freezer Refrigerator


Top Freezer Refrigerator

Available Products: FFHT1425VB, FFHT1425VV,


Available Colors: Black, Brushed Steel, White

FFHT1425VW Version: 08/22

## **Installation Diagram**

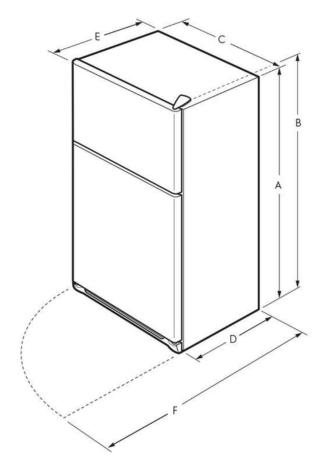

Α	59 <sup>7</sup> / <sub>8</sub> "
В	60 1/2"
С	27 <sup>5</sup> / <sub>8</sub> "
D	25 1/4"
Е	29 <sup>3</sup> / <sub>8</sub> "
F	53 <sup>5</sup> / <sub>8</sub> "

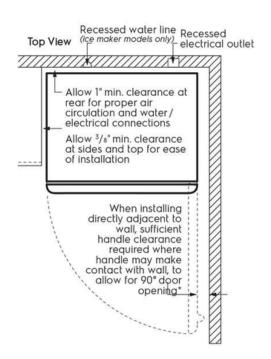

\* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)