

# Wgb7470

Wine Refrigerator

# LIEBHERR

## Refrigeration and Freezing



home.liebherr.com

Wgb7470	
Energy consumption (kWh / y)	130
Sound rating dB(A)	35
Total capacity cu.ft. (l)	19.8 (562)
Max. No. of Bourdeaux bottles (0.75l)	149
Number of wine racks	12
Shelves on telescopic rails	9
Self material	FlexFit
Sommelier kit	Yes
Electronic control	Touch & swipe display
Temperature range °F (°C)	41 to 68°F (5 to 20°C)
Temperature zones	3
Temperature alarm	Yes
Humidity Regulation	HumiditySelect
Interior light	ColumnLight
Door alarm	Yes
Safety thermostat	Yes-TempProtect Plus
Activated charcoal filter	Yes
Door lock	eDoorLock
Door hinges	Right, reversible
Product dimensions	
in inch (H / W / D)	79 5/16 / 27 1/2 / 30 1/8
in cm (H / W / D)	201.3 / 69.7 / 76.4
Cut out dimensions	
in inch (H / W / D)	80 / 27 15/16 / 26 15/16
in cm (H / W / D)	203.2 / 70.9 / 68.5
Net weight lbs. (kg)	335.5 (152.2)
Voltage V / Hz	115/60



## Accessories

FreshAir charcoal filter	9882460
--------------------------	---------

## Features

### 3 Zones

Ultimate wine flexibility with 3 temperature zones, independently set between 41°F and 68°F. Store reds, whites, and champagne, for the perfect conditions for your wine collection.

### Sommelier Kit

Add elegance to your space with the Sommelier-Board. Display wine, glasses, decanter, and utensils in style. This features include integrated storage box for its serving area.

### UV Protect Plus

Triple protection: three protective layers consisting of tinted glass and a double layer of vacuum-deposited offer unprecedented protection from UV radiation.

### Temp Protect Plus

Two sensors constantly measure the temperature in the wine refrigerator. A notification is sent in the event of a critical change.

### Light Column

Two vertical light columns illuminate your wine bottles like the pieces of art they are, every time you open the door, or all the time. The choice is yours – just like the light intensity.

### Flex Fit

Enjoy custom shelves with FlexFit boards. Adjustable wooden trim creates a perfect fit for every bottle, even Magnums. Maintain a tidy collection, and replace stained trim easily.

### Super Silent

Noise levels are kept to a minimum thanks to virtually silent, speed-controlled, and sound absorbing compressors.

### Soft System


SoftSystem integrated into the appliance door, cushions the door closure, thus eliminating slamming, even when the shelves are fully loaded.

\*\* Noise output - according to EN 60704-3


Not recommended for installation or use at altitude greater than 4900 feet above sea level.

# Diagrams

## Product Dimensions

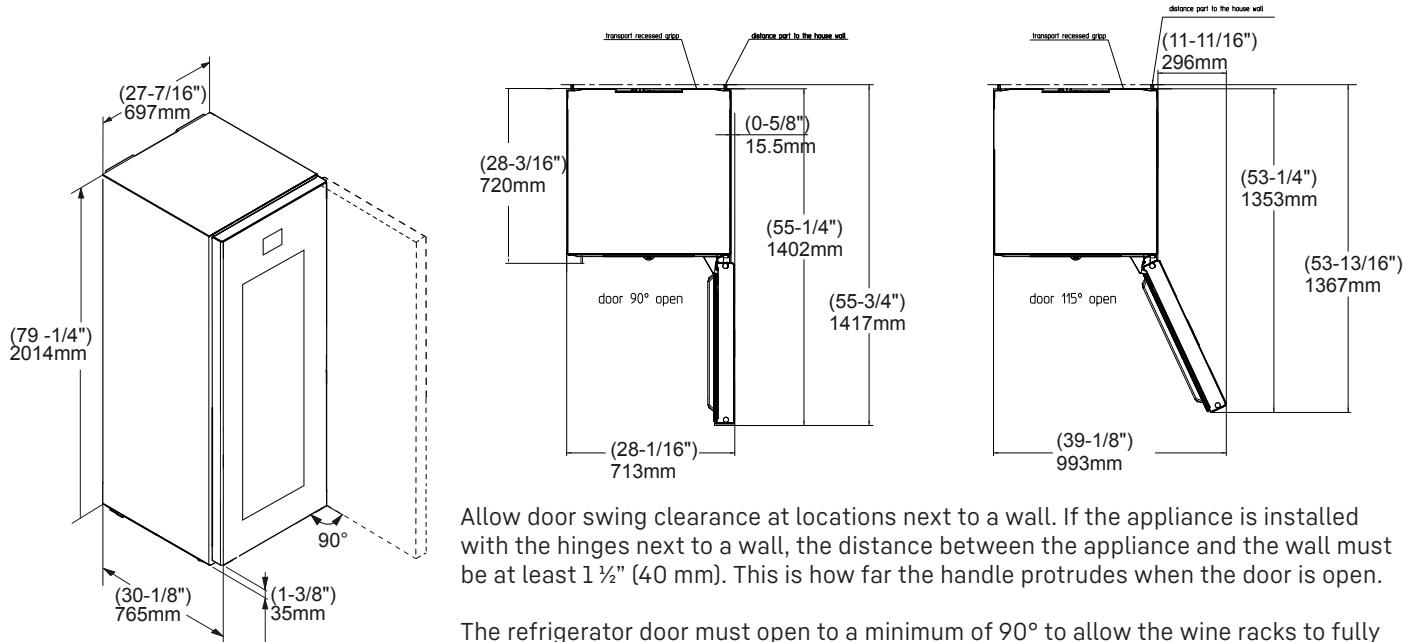

## Semi built-in look – Cutout Dimensions

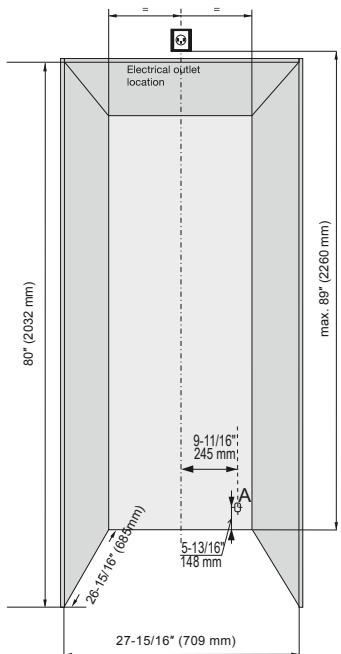

The appliance can be used freestanding or semi built-in. If semi built-in, consider the minimum cabinet opening dimensions specified on this image. For ventilation requirements, please follow instructions on section Ventilation Requirements in the Freestandig Design Guide.

The power cord exists the rear of the appliance (A) left side and has a length of 6.5 ft (2m). We suggest the electrical outlet not to be located behind the appliance, so it is easily accessible. This can be located on top of the niche like shown on the image or on the side.