

Jenn-Air Grill-Range Cooktop Cartridges

Black Glass-Ceramic (Model A120) (Model A120-8)	Twin element plug-in cooktop cartridge	Rated 240 V Rated 208 V
Solid Element (Model A105) (Model A105-8)	Twin element plug-in cooktop cartridge	Rated 240 V Rated 208 V
Conventional Coil (Model A100) (Model A100-8)	Twin element plug-in cooktop cartridge	Rated 240 V Rated 208 V
Induction (Model A130R—White) (Model A135R—Black) (Model A130F—White) (Model A135F—Black)	Twin element cartridges with rear plug-in Twin element cartridges with front plug-in	Dual rated 208/240 V Dual rated 208/240 V
Gas Surface Burner Module (Model AG200)	2 surface-burner assembly (for 4-burner cooking)	8000 BTUs per burner (LP—8,000 BTUs per burner)

Jenn-Air Grill-Range Cooktop Accessories

Model A312 Rotiss-Kebab: Chrome-finished motor, rotiss, skewers, all brackets included.

Model A141 Wok: Contoured element snaps in place of large conventional coil (in cartridge or Model C202 cooktop). Cannot be used with glass-ceramic, solid element or induction cartridges.

Model A335 Cooker-Steamer: Black non-stick coating. Large steaming basket, see-through cover included.

Model A341 Grill Cover: Covers grill between uses.

Model A300/AG301 Griddle: Family-sized black surface. Self-draining. Order Model A300 for electric grill-ranges and electric grill-range cooktops. Order Model AG301 for gas convertible cooktop.

Model A151/A151-8 Plug-In Energy-Saver Grill: Independent temperature control of front and rear grills (2800 watts total). Includes element, grates, grill rock plate and tray. Model A151 rated 240 V. Model A151-8 rated 208 V. Both models U.L. Listed.

Model A150/A150-8 Plug-In Standard Grill: 2800-watt grill element. Model A150 rated 240 V. Model A150-8 rated 208 V. Both models U.L. Listed.

Model A145 "Big Pot" Canning Element: Raised heating element replaces conventional coil element, sets an increased distance above cooking surface. U.L. Listed.

Model A912 Collo Luneta®: Removes stains and heat discoloration from stainless steel cooktops, cartridges and cookware.

Model A911 Collo Electrol®: Maintains the matte black appearance of Model A105 solid element cartridge burner surfaces.

Model A905 Cookbook—Complete Cooking with Jenn-Air: 192-page full-color cookbook with tested recipes for your Jenn-Air electric appliances.

Model A910 Cookware Set: 5-piece set includes 9" skillet, 2½-quart au gratin pan, 2-quart saucepan. Porcelain enamel-on-steel with triple-fired white porcelain exterior finish. Recommended for use on all Jenn-Air cooktops except solid element or glass-ceramic cartridges.

Ducting Data (Ranges)

See installation instructions included with product before making cutouts or beginning installation.

Model A403 surface wall cap
Single-damper; down discharge. Fits 3¼" × 10" duct.

Model A405 surface wall cap
Single spring-loaded damper; down discharge. Fits 5" diameter duct. Requires opening 5½" in diameter.

Model A406 surface wall cap
Single spring-loaded damper; down discharge. Fits 6" diameter duct. Requires opening 6½" in diameter.

Model A453 transition
5" round to 3¼" × 10" duct.

Model A456 transition
5" to 6" round duct.



Model A463 transition
6" round to 3¼" × 10" duct.

Model A495 transition
90° angle for transition from 5" round to 3¼" × 10" duct.


Model A496 transition
90° angle for transition from 6" round to 3¼" × 10" duct.

DUCT LENGTH RECOMMENDATIONS (MAXIMUM)


MODELS	5" Dia.	6" Dia. or 3¼" × 10"
D140, S160, S120, S100	Not Recommended	30'
C301, C228, C221, C202	20'	26'
C101, G102	22'	30'
CG200	10'	30'
Important: Use 6" or 3¼" × 10" duct on island or peninsula installations. For best performance, it is suggested that no more than two 90° elbows are used with 5" duct—or three with 6" or 3¼" × 10" duct.	Count Each 90° Elbow as 4' of Duct	Count Each 90° Elbow as 5' of Duct
	IMPORTANT Although not recommended, 5" or 6" flexible duct may be used for short runs. Each foot of flex duct counts as two (2) feet of metal duct. Each flex elbow counts as two (2) metal elbows.	

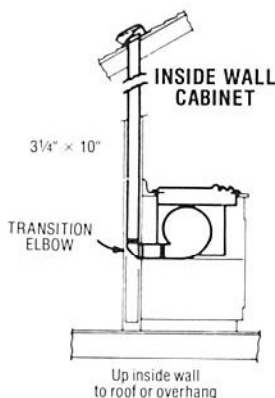

Glass-Ceramic



Solid Element




Conventional Coil



Plug-In Grill



Induction
(Black, White)




Models A405/A406
Surface Wall Cap




Model A403
Surface Wall Cap

OUTSIDE WALL CABINET




Directly to outside

PENINSULA OR ISLAND



Between floor joists

PENINSULA

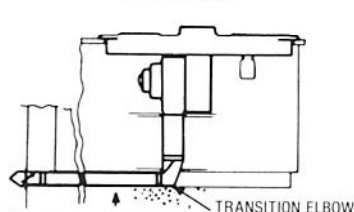

3¼" × 10" Through cabinet toe space

IMPORTANT

Ducted grill-ranges shown in this brochure are designed to be vented to the outdoors with 6" or 3¼" × 10" standard ducts. Convertible cooktops also may be ducted with 5" diameter duct (see chart at left). It is important that ducting instructions included with product be followed carefully. Failure to follow ducting recommendations or use recommended ducting accessories may result in substandard performance. Laundry-type wall caps never should be used.