EQUILITY™

TWO-PIECE RIGHT HEIGHT® ELONGATED SINGLE FLUSH TOILET



D2210AA109.415 - Left-Hand Trip Lever

D2210AA108.415 - Right-Hand Trip Lever

FEATURES

- Elongated bowl contemporary design
- Made of vitreous china
- 12″ (305 mm) rough-in
- Siphon action jetted bowl with smooth-sided, concealed trapway
- High efficiency, low consumption 1.28 gpf/4.8 Lpf
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- PowerWash® rim scrubs bowl with each flush
- 16-1/2″ (419 mm) rim height
- Fully-glazed 2-1/8″ trapway
- 3″ Flush valve
- Durable, slow-close telescoping seat made from polypropylene plastic
- Color-matched bolt hole covers

DIMENSIONS

NOMINAL DIMENSIONS

30-3/16″ x 15-1/8″ x 31-9/16″ (767 x 384 x 802 mm)

WATER SPOT

7-7/8″ (200 mm) wide
9-1/4″ (235 mm) length
5-1/2″ (140 mm) distance to rim

COLORS/FINISHES

Canvas White (415)

COMPONENTS

5025A15G.415	Contemporary Toilet Seat Elongated, Slow-Close, Topmount, Easy Lift Off, Telescoping
D24434A108.415	Right-hand tank, 1.0/1.28 gpf rough-in complete with coupling components and tank trim.
D24434A109.415	Left-hand tank, 1.0/1.28 gpf rough-in complete with coupling components and tank trim.
D23226A000.415	Right Height Elongated Bowl
735221-400.415	Tank Cover
7381891-200-XXX0A	Plated Trip Lever — Right-Hand Satin Nickel (295), Polished Nickel (008)
7381887-200-XXX0A	Plated Trip Lever — Left-Hand (optional component) Satin Nickel (295), Polished Nickel (008)

COMPLIANCE CERTIFICATIONS

Meets or Exceeds ASME A112.19.2-2008, CSA B45.1-08

EPA WaterSense® Certified

CEC and CALGreen® Compliant

ROUGH IN DIAGRAM SHOWN ON NEXT PAGE


Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for Accessible and Usable Building Facilities-Check Local Codes

CALGreen® is a registered trademark of California Building Standards Commission.

©2019 AS America Inc.

EQUILITY™

TWO-PIECE RIGHT HEIGHT®
ELONGATED SINGLE FLUSH TOILET

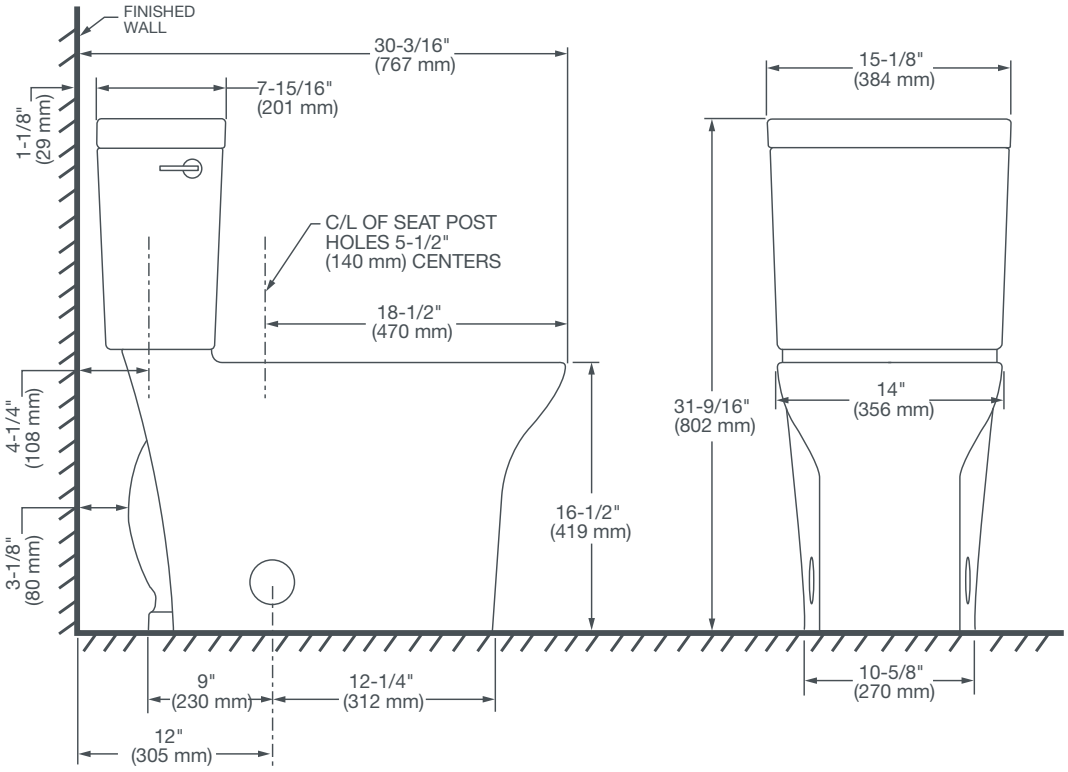

NOTES:
This toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet.
Supply not included with fixture and must be ordered separately.
* Dimensions shown for location of supply is suggested.

IMPORTANT:
Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL

©2019 AS America Inc.