

5 Technical data

5.1 JIDT730SBL

Parameter	Value
Supply voltage	240 V (208 V)
Frequency	60 Hz
Maximum power consumption	8.0 kW (6.9 kW)
Fuse protection	40 A
Dimensions	$30^{55}_{64} \times 22^{3}_{64} \times 7^{53}_{64}$ in 78.4 x 56 x 19.9 cm
Weight	42 lbs (19.1 kg)
Cooktop	
Surface material	Glass ceramic
Cooktop power levels	1 – 9, P
Front left cooking zone size	$\varnothing 8^{1}_{4}$ in, $\varnothing 21$ cm
Front left cooking zone output	2300 W
Front left cooking zone power setting output	3000 W
Rear left cooking zone size	$\varnothing 6^{7}_{8}$ in, $\varnothing 17.5$ cm
Rear left cooking zone output	1400 W
Rear left cooking zone power setting output	2100 W
Front right cooking zone size	$9^{1}_{16} \times 9^{1}_{16}$ in, 23 x 23 cm
Front right cooking zone output	2100 W
Front right cooking zone power setting output	3000 W
Rear right cooking zone size	$9^{1}_{16} \times 9^{1}_{16}$ in, 23 x 23 cm
Rear right cooking zone output	2100 W
Rear right cooking zone power setting output	3000 W
Energy efficiency	EnergyStar certified
Exhaust air system	
Cooktop extractor power levels	1 – 9, P
Airflow	332 cfm / sone at 100 cfm 0.271
Grease absorption rate	98.2 %

Tab. 5.1 Technical data for JIDT730SBL

5.2 Appliance dimensions JIDT730SBL

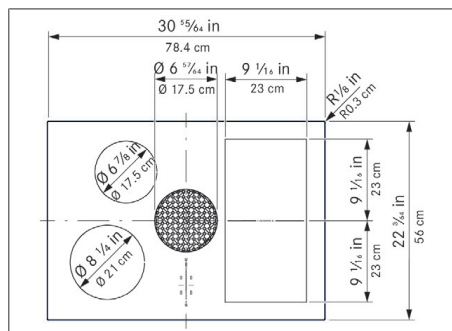


Fig. 5.1 Appliance dimensions top view

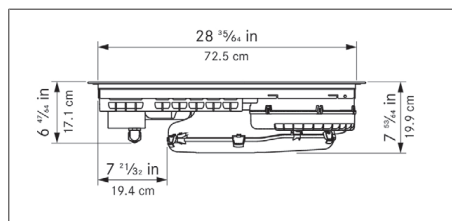


Fig. 5.2 Appliance dimensions front view

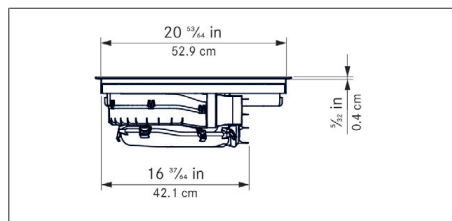


Fig. 5.3 Appliance dimensions side view