


UAG

Wall-mounted extraction hood

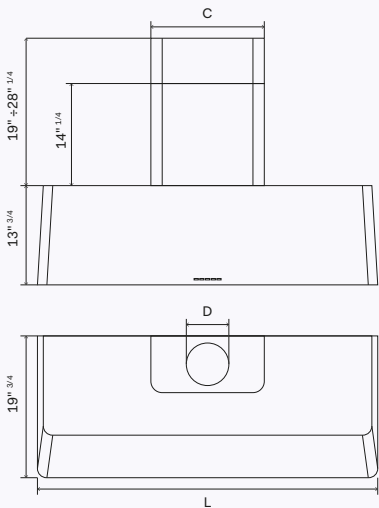

Color range

Body



White – WH



Antique white – AW



Stainless steel – SS



Graphite matt – MG



Glossy black – BK



Blue – MB



Burgundy red – BU



Emerald green – EG



Blue grey – BG



Optional RAL Classic – RA



UAG30

L = 29" 7⁄8 / C = 9" ¾ / D = 5" 7⁄8

Stainless steel back panel (h. = 26" / sp. = ½")

AM4-76

Flue extension (h. 31" ½)

EA088301000...*



UAG36

L = 35" 7⁄8 / C = 9" ¾ / D = 5" 7⁄8

Stainless steel back panel (h. = 26" / sp. = ½")

AM4-90

Flue extension (h. 31" ½)

EA088301000...*



UAG40

L = 39" 7⁄8 / C = 9" ¾ / D = 5" 7⁄8

Stainless steel back panel (h. = 26" / sp. = ½")

AM4-100

Flue extension (h. 31" ½)

EA088301000...*



UAG48

L = 47" 7⁄8 / C = 15" ¾ / D = 7" 7⁄8

Stainless steel back panel (h. = 26" / sp. = ½")

AM4-120

Flue extension (h. 31" ½)

EA088300600...*



UAG60

L = 59" ½ / C = 15" ¾ / D = 7" 7⁄8

Stainless steel back panel (h. = 26" / sp. = ½")

AM4-150

Flue extension (h. 31" ½)

EA088300600...*

* Complete the flue cover extension code, by entering the following in place of the ellipsis "...":
0001 for Antique White - 0002 for White - 0008 for Stainless Steel - 0010 for Charcoal / Matte - 0052 for Burgundy Red - 0054 for Blue - 0056 for Green - 7031 for Blue Grey

General features

- Front LED bar
 - Painted steel body, AISI 304 stainless steel (only inox version)
 - Anodised aluminium filters
 - Automatic filter cleaning warning light
 - Maximum air flow 600 cfm / 850 cfm on mod UAG48 - UAG60
- Maximum power: 450 W
 - Flue outlet hole dimension: 5" 7/8 - 7" 7/8 on mod UAG48 - UAG60
 - Four-speed controls (3 + intensive)
 - Automatic delayed shutdown