MONTERREY®
TWO-HANDLE TOP-MOUNT KITCHEN FAUCET
RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH



6405.141 Shown


MODEL NUMBER:

❑ **6405.141 Top Mount Faucet with 5" Gooseneck Spout**
Field-convertible rigid / swivel gooseneck spout. Vandal-resistant metal lever handles with red/blue indexes. 1.5 gpm pressure compensating aerator. Color matched spray.

❑ **6405.140 Top Mount Faucet with 5" Gooseneck Spout**
Same as above, less spray.

❑ **6405.171 Top Mount Faucet with 5" Gooseneck Spout**
Field-convertible rigid / swivel gooseneck spout. Vandal-resistant metal wrist blade handles with red/blue indexes. 1.5 gpm pressure compensating aerator. Color matched spray.

❑ **6405.170 Top Mount Faucet with 5" Gooseneck Spout**
Same as above, less spray.

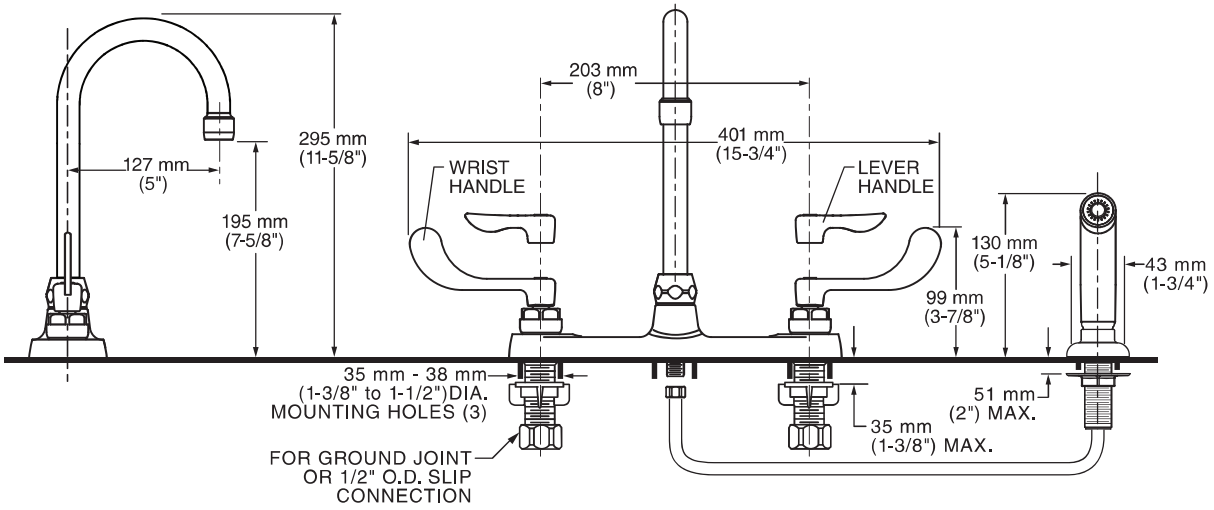

GENERAL DESCRIPTION:
Durable cast brass construction. Field-convertible rigid-swivel gooseneck spout with 5" reach. 1/4 turn ceramic disc valve cartridges. 1/2" male threaded inlet shanks with shank nuts and brass coupling nuts. Choice of vandal-resistant wrist blade or lever handles with blue & red color indexes. 1.5 gpm/5.7 L/min. maximum flow rate.

PRODUCT FEATURES:
Ceramic Disc Valve Cartridges: Assure a lifetime of drip-free performance.

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Field-Convertible Rigid / Swivel Gooseneck Spout

Solid Brass Construction: Durable. Excellent in high use applications. Ideal for prolonged contact with water.

Handle Choice: Vandal-resistant lever or wrist blade handles with red & blue indexed handles.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

SUGGESTED SPECIFICATION:
Two handle top-mount kitchen faucet shall feature cast brass construction with all brass coupling nuts. Shall feature brass, field-convertible rigid/swivel spout with 5" reach. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model #6405.1__.002.


© 2016 AS America Inc.

MONTERREY®
TWO-HANDLE TOP-MOUNT KITCHEN FAUCET
RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B125.1
NSF 61/Section 9, Annex G
CALGreen

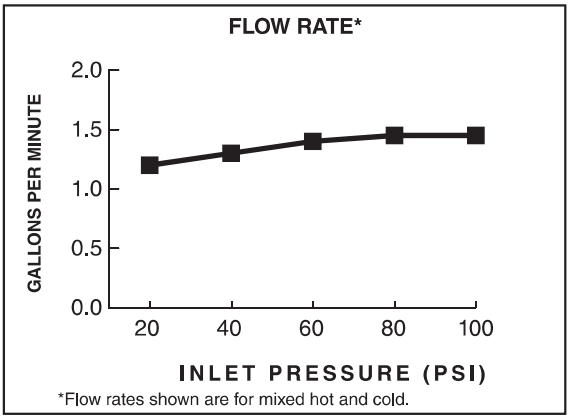

Product Number	Description	Finish: Polished Chrome 002
6405.141	Top mount faucet with field-convertible 5" rigid / swivel spout. VR lever handles. 1.5 gpm PCA aerator. With color matched spray.	
6405.140	Top mount faucet with field-convertible 5" rigid / swivel spout. VR lever handles. 1.5 gpm PCA aerator. Less spray.	
6405.171	Top mount faucet with field-convertible 5" rigid / swivel spout. VR wrist blade handles. 1.5 gpm PCA aerator. With color matched spray.	
6405.170	Top mount faucet field-convertible 5" rigid / swivel spout. VR wrist blade handles. 1.5 gpm PCA aerator. Less spray.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND **ANSI A117.1** REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
L15	1.5 gpm (5.7 Lpm) PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V05	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Non-Aerated Spray
V035	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray

*PCA - Pressure Compensating
All modifications meet CALGreen Code

© 2016 AS America Inc.