

FEATURES

- Custom front panel and hardware allow for infinite design options.
- Integrated design allows for dual installation with integrated unit.
- Full-view, UV-resistant glass door—high altitude glass available.
- Full-size wine storage with individual temperature control of two separate compartments.
- Maintains ideal storing and serving temperature for all wines, humidity and UV protection.
- Temperature zones range from 40°F to 65°F.
- Illuminated touch control panel.
- Discreet interior lighting.
- Wine racks accommodate 750 ml bottles, half-bottles and magnums.
- Roller-glide wine racks with natural cherrywood facing have three-quarter extension for easy access.
- Illuminated display rack for prized bottles of wine.
- Home security system connection.
- Star-K compliant with installation of a harness kit.



MODEL

Wine Storage	427G
--------------	------

Specify RH or LH door.

ACCESSORIES

- Stainless steel front panel with tubular or pro handle—80" or 84" finished height.
- Stainless steel tubular and pro handles.
- Solid overlay door.
- Dual installation kit for installation with integrated column, tall or drawer model.
- Door lock.

Accessories available through an authorized Sub-Zero dealer. For local dealer information, visit the find a showroom section of our website, subzero.com.


ENEMIES OF WINE

Heat. Two independent storage zones can be set in a range of 40°F to 65°F, with one-degree digital accuracy.

Light. UV-resistant, bronze-tinted glass shields wines from harmful rays.

Humidity. Dual evaporators, one for each storage zone, maintain steady, moderate humidity.

Vibration. Sub-Zero's quiet compressor allows wine to rest undisturbed. Racks glide out smoothly, providing access without agitating the wine.

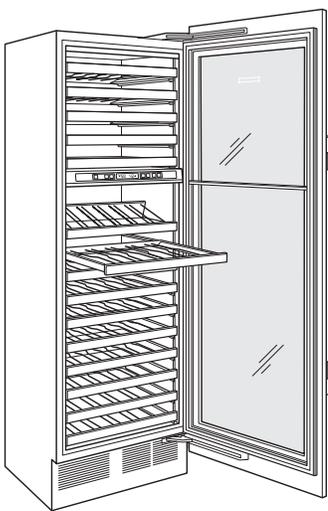

Model 427G



Wine rack arrangement.



SPECIFICATIONS	
PRODUCT	
Dimensions	27"W x 80"H x 24"D
Door Clearance	25 1/2"
Weight	395 lb
CAPACITY	
Wine Storage	132 bottles (750 ml)
ELECTRICAL	
Supply	115 VAC, 60 Hz
Service	15 amp circuit

Product dimensions do not include panel or handle and will vary with panel thickness. Allow for panel thickness when planning the finished opening depth.

Specifications are subject to change without notice. Visit subzero.com/specs for the most up-to-date information.


Dimensions may vary $\pm 1/8"$ (3). Dimensions in parentheses are millimeters unless otherwise specified.

DIMENSIONS

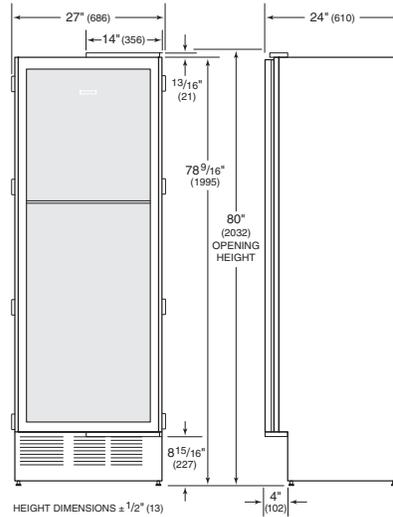

DIMENSIONS WILL VARY WITH PANEL THICKNESS

ELECTRICAL



INSTALLATION

