

24" Whole Bean Coffee System

CVA 6401 OBSW



Whole Bean Coffee System

CVA 6401 OBSW



CVA 6401 OBSW

Features:

- DirectSensor controls: choose an operating mode with a single touch of one of the symbols on the left of the display. The touch component to the right of the display is used to navigate through the different levels.
- OneTouch function prepares beverage with the touch of a button
- OneTouch for Two operation dispenses two cappuccino or latté macchiato drinks, coffee or espresso simultaneously
- EasyClick Milk System simply clicks the milk reservoir into and out of place at the front of the machine
- Dishwasher-safe milk flask
- Automatic rinsing and cleaning programs
- Up to 10 user profiles
- The coffee pot function allows up to 8 cups of coffee to be brewed at one time
- BrilliantLight
- Timer function
- Ground coffee chute for whole bean bypass
- Removable brew unit for easy cleaning
- Removable water tank

SPECIFICATIONS

CVA 6401 OBSW — Item 29640120USA

Overall Unit Width - Excluding Fascia Dimension	21 ⁷ / ₁₆ " (545 mm)
Overall Height - Excluding Fascia Dimension	17 ¹ / ₂ " (445 mm)
Overall Unit Depth - Excluding Fascia Dimension	18 ¹ / ₈ " (460 mm)
Depth with Door Open	41 ¹ / ₂ " (1054 mm)
Overall Fascia Dimensions	23 ⁷ / ₁₆ " (595 mm) W x 17 ¹⁵ / ₁₆ " (455.5 mm) H x 1 ³ / ₁₆ " (22 mm) D

Built-In

Minimum Cabinet Width	22 ¹ / ₁₆ " (560 mm)
Minimum Cabinet Depth	21 ⁵ / ₈ " (550 mm)
Minimum Cabinet Opening Height	17 ¹¹ / ₁₆ " (450 mm)
Minimum Base Support	62 lbs

Additional Cut-outs Required	Venting: 19 ¹¹ / ₁₆ " (500 mm) x 1 ⁹ / ₁₆ " (40 mm) or 78 ³ / ₄ " in ² (200 cm ²)
------------------------------	--

Electrical

Electrical Requirements	120V, 60Hz, 15A
Power Cord	Molded NEMA 5-15A plug, 6 ft (1.8 m)

Shipping


Shipping Weight	70 lbs
Shipping Dimensions	23 ⁵ / ₈ " W x 22 ¹ / ₁₆ " H x 26" L

Support


Call Miele	800.843.7231
Miele Website	www.mieleusa.com
20/20 Link	2020technologies.com

PRODUCT VIEWS

Isometric View

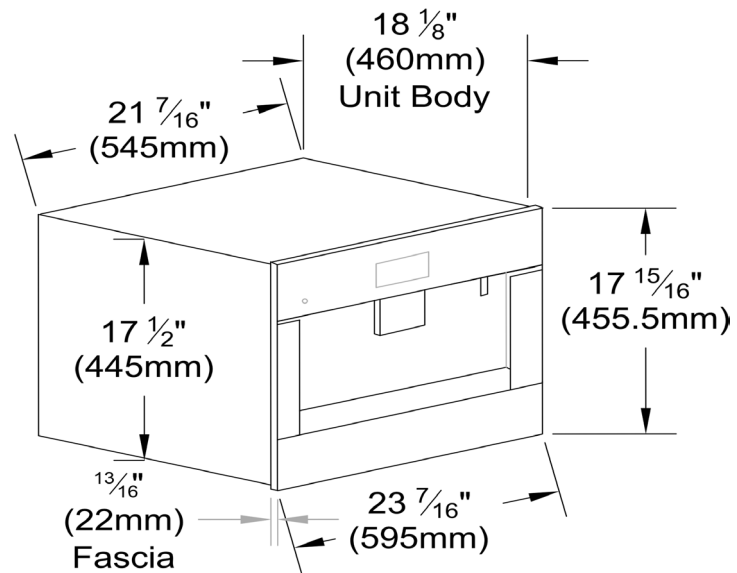

Top View, Door Open

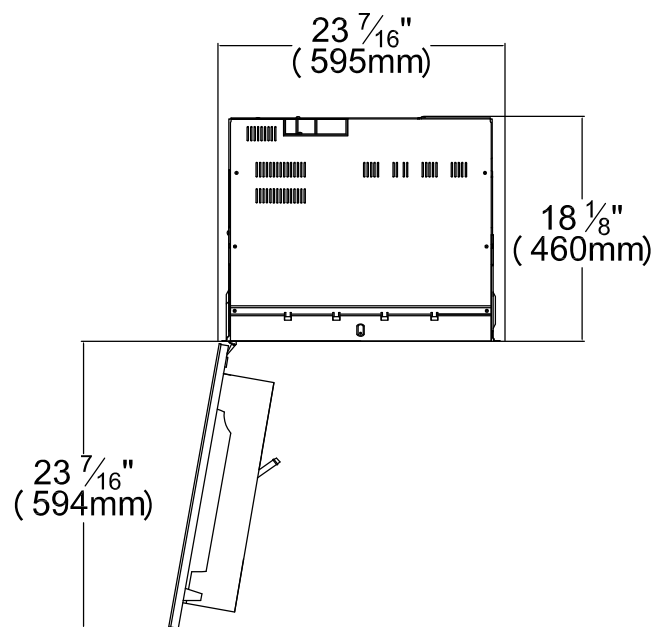


Whole Bean Coffee System

CVA 6401 OBSW




PRODUCT VIEWS


Front View

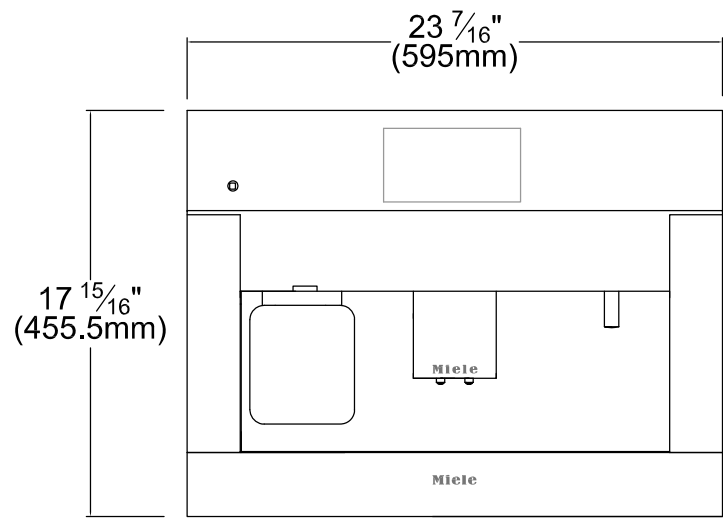

Side View

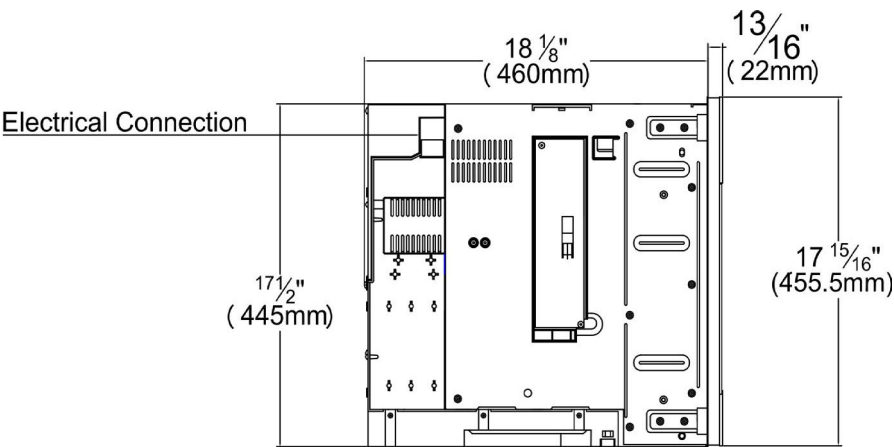


PRODUCT VIEWS

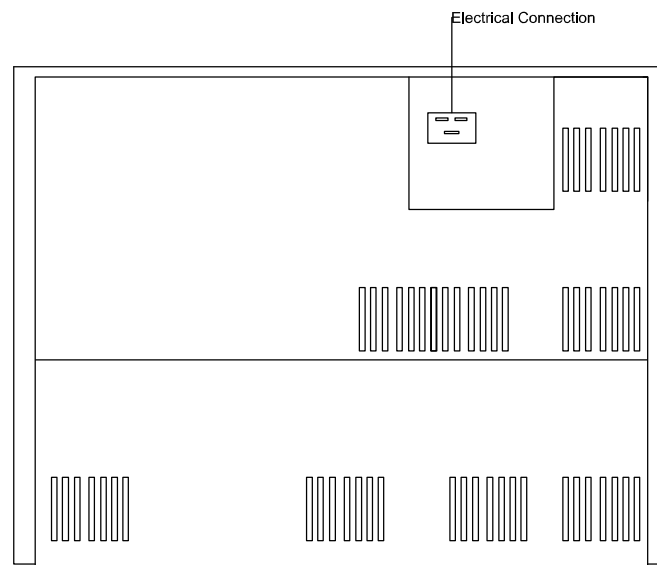



Whole Bean Coffee System CVA 6401 OBSW



INSTALLATION IN COMBINATION WITH WARMING DRAWER

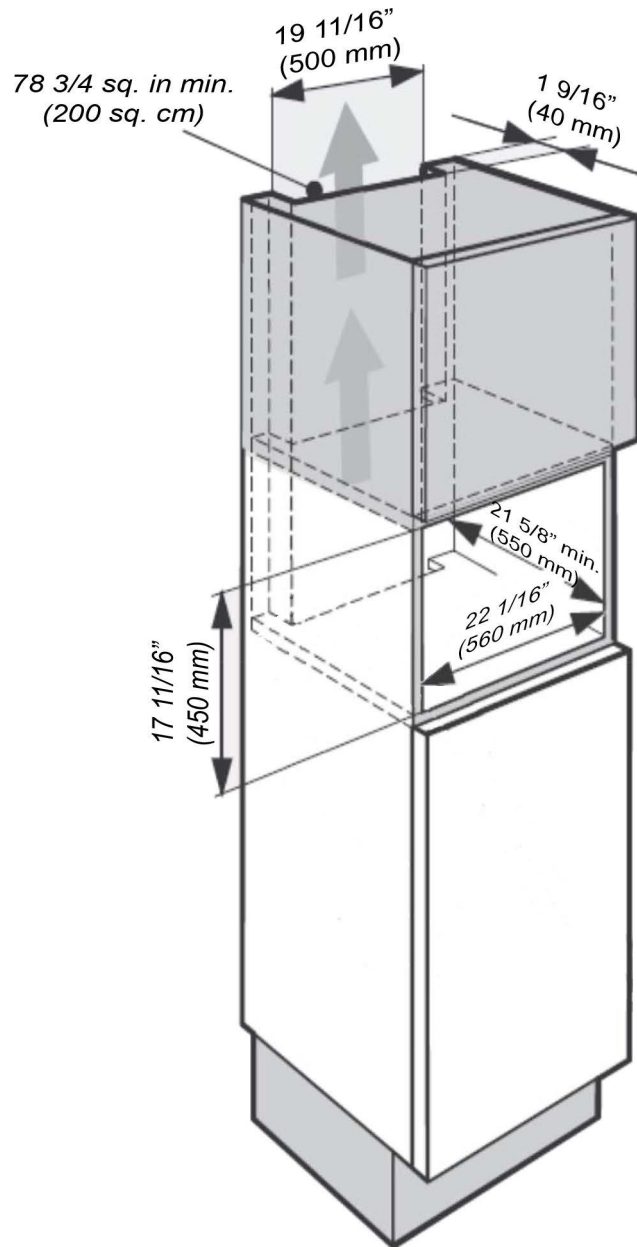


Lower gap adjustment detail when
solo installed.
(Adjusted by feet of CVA unit.)

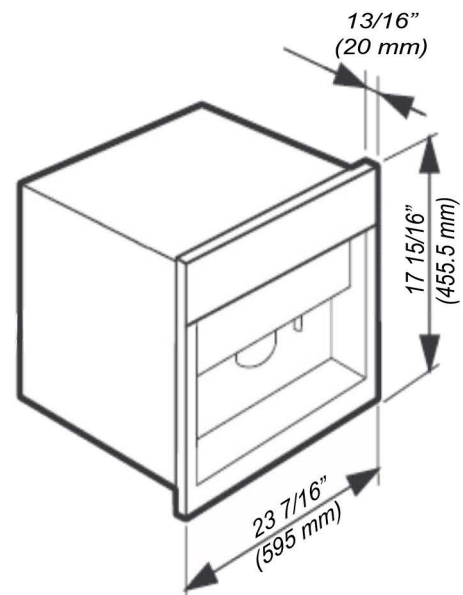

PLEASE NOTE: The vent cut out must only be at the top of the niche to prevent condensation inside the door and inner components that the customer can see when opening the door.

INSTALLATION SPECIFICATIONS

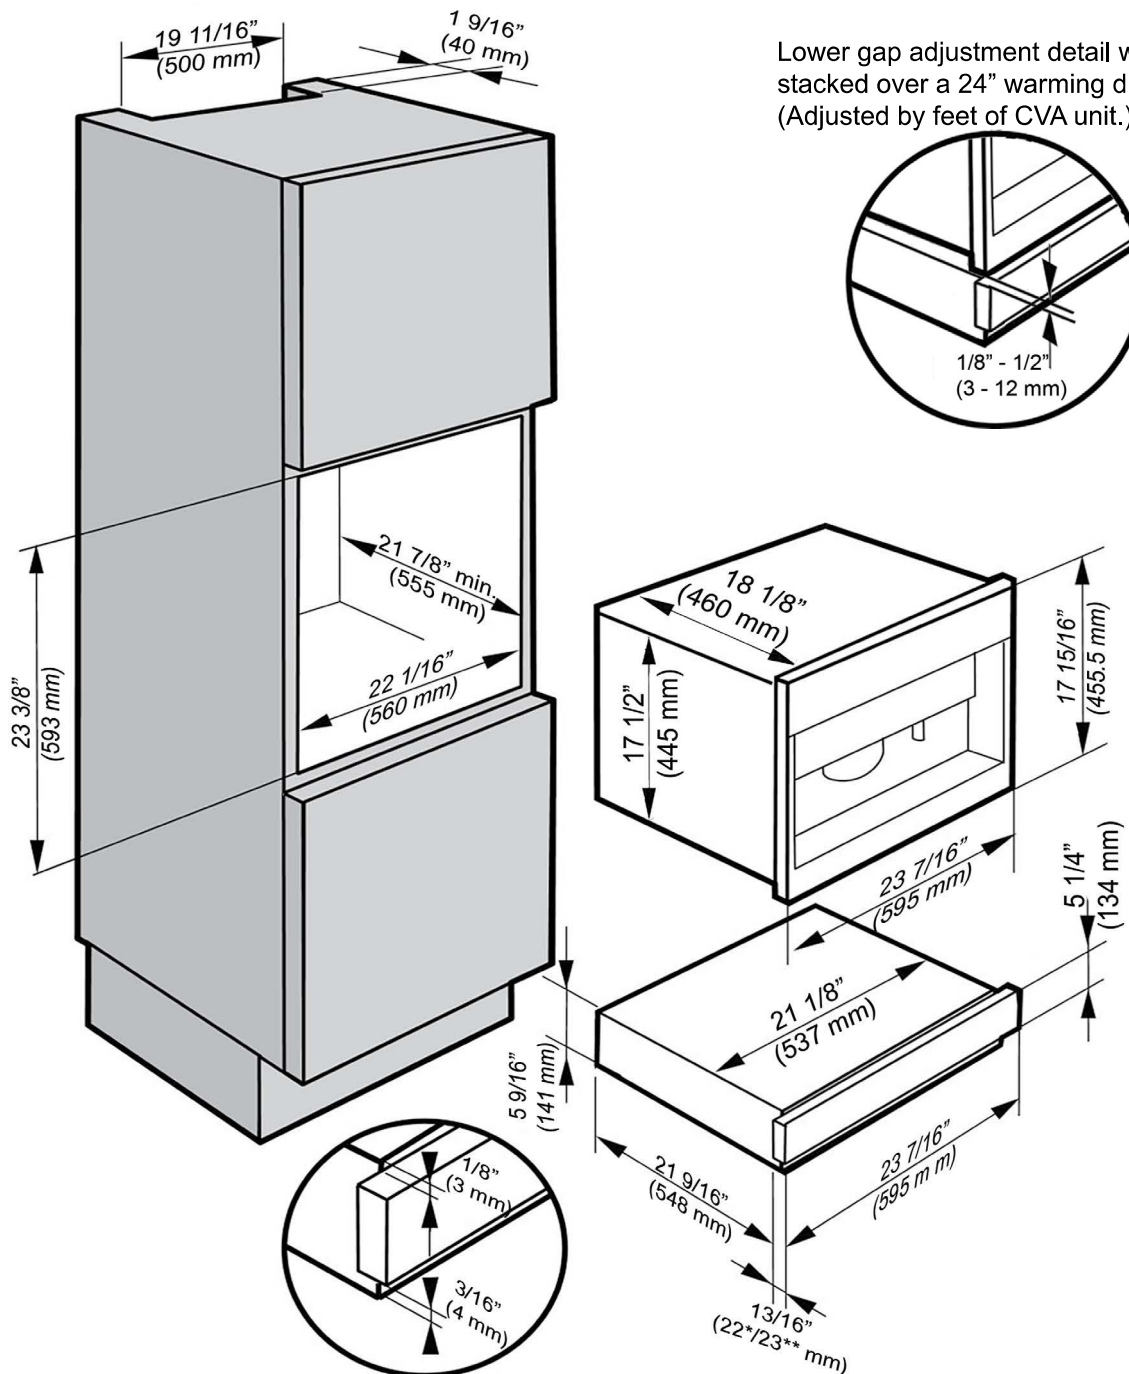

PLEASE NOTE: The vent cut out must only be at the top of the niche to prevent condensation inside the door and inner components that the customer can see when opening the door.