




# 24" INDUCTION COOKTOP

#### CTI24310

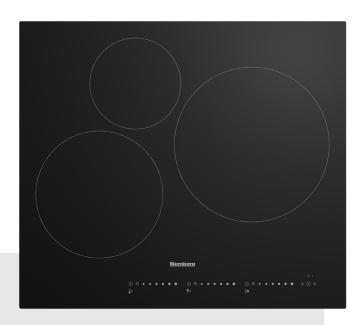

#### **FEATURES**

- Three Induction Cooking Zones
- Slide Touch Control with Independent Zone Timers
- Precise temperature control with 9 cooking levels
- Power boost for reaching the highest temperature quickly and efficiently.

Front Left (Standard / Boost)         8" - 2,300 W / 3,700 W           Rear Left (Standard / Max. Boost)         6" - 1,400 W / 2,200 W           Right (Standard / Max. Boost)         10" - 2,600 W / 3,700 W           On/Off Light         Yes           Digital Display for Power Level Indication         Yes           Timer Display         Yes           Boost Function         Yes           Automatic Pan Detection         Yes           Residual Heat Indicators         Yes           Independent Zone Timers         Yes           Child Lock         Yes           Display Lock         Yes           POWER / RATINGS           Total Power Consumption         7,400 W           Volts / Frequency         220/240 V, 60 Hz           Min. Circuit Breaker Size         40 A	GENE	RAL
LED Display - Touch Slider	Size	24 "
Display Lock	Finish	Frameless Black Glass
Ves	Control Type	LED Display – Touch Slider
Fuel Type    Induction	Display Lock	Yes
FEATURES & PERFORMANCE   9	Control Lock	Yes
Cooking Levels         9           Zone Configuration         3 Induction           Front Left (Standard / Boost)         8" – 2,300 W / 3,700 W           Rear Left (Standard / Max. Boost)         6" – 1,400 W / 2,200 W           Right (Standard / Max. Boost)         10" – 2,600 W / 3,700 W           On/Off Light         Yes           Digital Display for Power Level Indication         Yes           Timer Display         Yes           Boost Function         Yes           Automatic Pan Detection         Yes           Residual Heat Indicators         Yes           Independent Zone Timers         Yes           Child Lock         Yes           Display Lock         Yes           POWER / RATINGS           Total Power Consumption         7,400 W           Volts / Frequency         220/240 V, 60 Hz           Min. Circuit Breaker Size         40 A           Electrical Connection         Flexible Conduit, 3-Wire or 4-Win           DIMENSIONS / WEIGHT           Product (H x W x D) (in)         2 5/16 x 23 7/12 x 20 45/52           Required Cutout Size (W x D) (in)         22 1/16 x 19 5/16	Fuel Type	Induction
Zone Configuration 3 Induction  Front Left (Standard / Boost) 8" – 2,300 W / 3,700 W  Rear Left (Standard / Max. Boost) 6" – 1,400 W / 2,200 W  Right (Standard / Max. Boost) 10" – 2,600 W / 3,700 W  On/Off Light Yes  Digital Display for Power Level Indication Yes  Timer Display Yes  Boost Function Yes  Automatic Pan Detection Yes  Residual Heat Indicators Yes  Independent Zone Timers Yes  Child Lock Yes  Display Lock Yes  POWER / RATINGS  Total Power Consumption 7,400 W  Volts / Frequency 220/240 V, 60 Hz  Min. Circuit Breaker Size 40 A  Electrical Connection Flexible Conduit, 3-Wire or 4-Win DIMENSIONS / WEIGHT  Product (H x W x D) (in) 2 5 / 16 x 23 7 / 12 x 20 43 / 52  Required Cutout Size (W x D) (in) 22 1 / 16 x 19 5 / 16	FEATURES & PI	ERFORMANCE
Front Left (Standard / Boost)  Rear Left (Standard / Max. Boost)  Right (Standard / Max. Boost)  On/Off Light  Ves  Digital Display for Power Level Indication  Timer Display  Boost Function  Automatic Pan Detection  Residual Heat Indicators  Independent Zone Timers  Child Lock  Power Attings  Total Power Consumption  Volts / Frequency  Min. Circuit Breaker Size  Electrical Connection  Pin 2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in)  Residuel (M x X 9 2,000 W / 3,700 W)  10" - 2,300 W / 3,700 W  Yes  Pes  10" - 2,600 W / 3,700 W  Yes  Yes  Pes  Power Attings  Total Power Level Indication  Yes  Power Yes  Power / RATINGS  Total Power Consumption  7,400 W  Volts / Frequency  220/240 V, 60 Hz  Ho A  Electrical Connection  Elexible Conduit, 3-Wire or 4-Win  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  25/16 x 23 7/12 x 20 43/52  22 1/16 x 19 5/16	Cooking Levels	9
Rear Left (Standard / Max. Boost)  Right (Standard / Max. Boost)  On/Off Light  Yes  Digital Display for Power Level Indication  Yes  Timer Display  Boost Function  Automatic Pan Detection  Residual Heat Indicators  Independent Zone Timers  Child Lock  Power Attings  Total Power Consumption  Yolts / Frequency  Min. Circuit Breaker Size  Electrical Connection  Pinal Automatic Pan Detection  Residual Heat Indicators  Power Attings  Total Power Consumption  7,400 W  220/240 V, 60 Hz  Automatic Pan Detection  Flexible Conduit, 3-Wire or 4-Win DIMENSIONS / WEIGHT  Product (H x W x D) (in)  Required Cutout Size (W x D) (in)	Zone Configuration	3 Induction
Right (Standard / Max. Boost)  On/Off Light  Yes  Digital Display for Power Level Indication  Yes  Timer Display  Boost Function  Automatic Pan Detection  Residual Heat Indicators  Independent Zone Timers  Yes  Child Lock  Yes  Display Lock  POWER / RATINGS  Total Power Consumption  Yots  Frequency  Min. Circuit Breaker Size  Electrical Connection  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  Required Cutout Size (W x D) (in)  Pes  Yes  10" - 2,600 W / 3,700 W  Yes  Yes  Yes  Yes  Automatic Pan Detection  Yes  Yes  Power  Automatic Pan Detection  Yes  Yes  Power  Automatic Pan Detection  Yes  Yes  Power  Automatic Pan Detection  Yes  Automatic Pan Detection  Yes  Yes  Power  Automatic Pan Detection  Flexible Conduit, 3-Wire or 4-Wire  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  25 % 16 x 23 7/12 x 20 48/52  22 1/16 x 19 5/16	Front Left (Standard / Boost)	8" – 2,300 W / 3,700 W
On/Off Light  Digital Display for Power Level Indication  Yes  Timer Display  Boost Function  Automatic Pan Detection  Residual Heat Indicators  Independent Zone Timers  Child Lock  Yes  Display Lock  POWER / RATINGS  Total Power Consumption  7,400 W  Volts / Frequency  Min. Circuit Breaker Size  Electrical Connection  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  Required Cutout Size (W x D) (in)  Yes  Yes  40 A  Electrical Conduit, 3-Wire or 4-Wire  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  Required Cutout Size (W x D) (in)	Rear Left (Standard / Max. Boost)	6" - 1,400 W / 2,200 W
Digital Display for Power Level Indication  Yes  Timer Display  Boost Function  Automatic Pan Detection  Residual Heat Indicators  Independent Zone Timers  Child Lock  Yes  Display Lock  POWER / RATINGS  Total Power Consumption  7,400 W  Volts / Frequency  Min. Circuit Breaker Size  Electrical Connection  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  Required Cutout Size (W x D) (in)  Yes  Yes  Yes  Yes  Automatic Pan Detection  Yes  Yes  Yes  Yes  PoWER / RATINGS  Total Power Consumption  7,400 W  220/240 V, 60 Hz  40 A  Electrical Connection  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  Required Cutout Size (W x D) (in)	Right (Standard / Max. Boost)	10" - 2,600 W / 3,700 W
Timer Display Yes  Boost Function Yes  Automatic Pan Detection Yes  Residual Heat Indicators Yes  Independent Zone Timers Yes  Child Lock Yes  Display Lock Yes  POWER / RATINGS  Total Power Consumption 7,400 W  Volts / Frequency 220/240 V, 60 Hz  Min. Circuit Breaker Size 40 A  Electrical Connection Flexible Conduit, 3-Wire or 4-Win  DIMENSIONS / WEIGHT  Product (H x W x D) (in) 2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in) 22 1/16 x 19 5/16	On/Off Light	Yes
Boost Function   Yes	Digital Display for Power Level Indication	Yes
Automatic Pan Detection  Residual Heat Indicators  Independent Zone Timers  Child Lock  Yes  Child Lock  Yes  Display Lock  POWER / RATINGS  Total Power Consumption  7,400 W  Volts / Frequency  220/240 V, 60 Hz  Min. Circuit Breaker Size  40 A  Electrical Connection  Flexible Conduit, 3-Wire or 4-Wir  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in)  2 2 1/16 x 19 5/16	Timer Display	Yes
Nesidual Heat Indicators   Yes	Boost Function	Yes
Independent Zone Timers   Yes	Automatic Pan Detection	Yes
Child Lock         Yes           Display Lock         Yes           POWER / RATINGS           Total Power Consumption         7,400 W           Volts / Frequency         220/240 V, 60 Hz           Min. Circuit Breaker Size         40 A           Electrical Connection         Flexible Conduit, 3-Wire or 4-Windows           DIMENSIONS / WEIGHT           Product (H x W x D) (in)         2 5/16 x 23 7/12 x 20 43/52           Required Cutout Size (W x D) (in)         22 1/16 x 19 5/16	Residual Heat Indicators	Yes
Display Lock         Yes           POWER / RATINGS           Total Power Consumption         7,400 W           Volts / Frequency         220/240 V, 60 Hz           Min. Circuit Breaker Size         40 A           Electrical Connection         Flexible Conduit, 3-Wire or 4-Win           DIMENSIONS / WEIGHT           Product (H x W x D) (in)         2 5/16 x 23 7/12 x 20 43/52           Required Cutout Size (W x D) (in)         22 1/16 x 19 5/16	Independent Zone Timers	Yes
POWER / RATINGS           Total Power Consumption         7,400 W           Volts / Frequency         220/240 V, 60 Hz           Min. Circuit Breaker Size         40 A           Electrical Connection         Flexible Conduit, 3-Wire or 4-Win           DIMENSIONS / WEIGHT           Product (H x W x D) (in)         2 5/16 x 23 7/12 x 20 43/52           Required Cutout Size (W x D) (in)         22 1/16 x 19 5/16	Child Lock	Yes
Total Power Consumption         7,400 W           Volts / Frequency         220/240 V, 60 Hz           Min. Circuit Breaker Size         40 A           Electrical Connection         Flexible Conduit, 3-Wire or 4-Win           DIMENSIONS / WEIGHT           Product (H x W x D) (in)         2 5/16 x 23 7/12 x 20 43/52           Required Cutout Size (W x D) (in)         22 1/16 x 19 5/16	Display Lock	Yes
Volts / Frequency  220/240 V, 60 Hz  Min. Circuit Breaker Size  40 A  Electrical Connection  Flexible Conduit, 3-Wire or 4-Wire  DIMENSIONS / WEIGHT  Product (H x W x D) (in)  2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in)  22 1/16 x 19 5/16	POWER / I	RATINGS
Min. Circuit Breaker Size 40 A  Electrical Connection Flexible Conduit, 3-Wire or 4-Win  DIMENSIONS / WEIGHT  Product (H x W x D) (in) 2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in) 22 1/16 x 19 5/16	Total Power Consumption	7,400 W
Electrical Connection   Flexible Conduit, 3-Wire or 4-Win   DIMENSIONS / WEIGHT	Volts / Frequency	220/240 V, 60 Hz
DIMENSIONS / WEIGHT  Product (H x W x D) (in) 2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in) 22 1/16 x 19 5/16	Min. Circuit Breaker Size	40 A
Product (H x W x D) (in) 2 5/16 x 23 7/12 x 20 43/52  Required Cutout Size (W x D) (in) 22 1/16 x 19 5/16	Electrical Connection	Flexible Conduit, 3-Wire or 4-Wire
Required Cutout Size (W x D) (in) 22 1/16 x 19 5/16	DIMENSIONS	S / WEIGHT
	Product (H x W x D) (in)	2 <sup>5</sup> / <sub>16</sub> x 23 <sup>7</sup> / <sub>12</sub> x 20 <sup>43</sup> / <sub>52</sub>
Product Weight (lbs) 26.45	Required Cutout Size (W x D) (in)	22 <sup>1</sup> / <sub>16</sub> x 19 <sup>5</sup> / <sub>16</sub>
	Product Weight (lbs)	26.45








## 24" INDUCTION COOKTOP


CTI24310

## **Dimensions and Installation**


#### Top

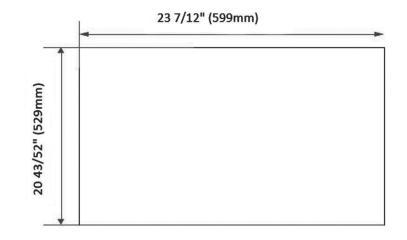


## **Countertop Cutout**

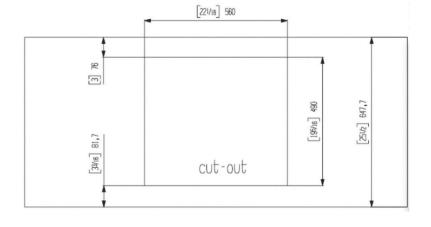

#### Side-Side View & Front Side View

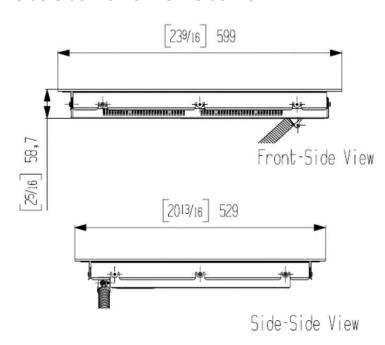

## **Under Counter - Side View**



NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.com or call 888-352-2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.

