

## KFN 7795 D

Built-in bottom-mount units, 70 in (178 cm) niche height

PerfectFresh Active, DynaCool, and IceMaker for outstanding appearance.



- Fresh 5x longer with active humidification – PerfectFresh Active
- Ice cubes thanks to the plumbed IceMaker
- Individually adjustable glass shelf lighting with FlexiLight 2.0
- No icing up of food and no need to defrost thanks to NoFrost
- Uniform temperature distribution inside the appliance – DynaCool

EAN: 4002516424925 / Material number: 11749900 /  
Old Material Number: 38779500USA

<b>General information</b>	
Model number	KFN 7795 D
Manufacturer material number	11749900
EAN number	4002516424925
Marketing class	Diamond
<b>Appliance category</b>	
Fridge-freezer	•
<b>Design</b>	
Built-in	•
Built-in integrated	•
Door hinge side	right
Convertible hinging	•
<b>Design</b>	
Freezer compartment lighting	LED
Fan lighting	•
Freshness system lighting	•
IceMaker lighting	•
<b>User convenience</b>	
Fridge zone lighting	FlexiLight 2.0
Networking with Miele@home	•
Freshness system	PerfectFresh Active
Fine adjustment inner door	•
ComfortClean	•
ComfortSize	•
DynaCool	•
Party mode	•
Holiday mode	•
NoFrost	•
DuplexCool	•
VarioRoom	•
SoftClose door closing damper	•
SelfClose	•
IceMaker with plumbed water connection	•
Ice/Water dispenser with plumbed water connection	No
<b>Control</b>	
Electronic temperature display and control	FreshTouch
Fridge compartment can be switched off	Yes
Independent temperature control of fridge and freezer compartments	Yes
SuperCool	•
SuperFrost	•
No. of temperature zones	3
Sabbath mode	•
<b>Fridge/fridge zone</b>	
No. of shelves	4
of which illuminated	2
No. of PerfectFresh drawers	2
Dry back wall	Clean Touch Steel

KFN 7795 D

Built-in bottom-mount units, 70 in (178 cm) niche height

PerfectFresh Active, DynaCool, and IceMaker for outstanding appearance.




EAN: 4002516424925 / Material number: 11749900 /  
Old Material Number: 38779500USA

FlexiTray	•
Number of door racks for cans	1
Door rack for bottles	1
Door shelves	2
<b>Freezer/freezer zone</b>	
Number of freezer drawers	3
of which on runners	2
<b>Efficiency and sustainability</b>	
Energy Star Qualified	•
<b>Safety</b>	
Lock function	•
Acoustic door alarm	•
Acoustic temperature alarm, freezer section	•
Optical door alarm	•
Optical temperature alarm	•
Power cut indication for freezer compartment	•
<b>Technical data</b>	
Niche width in inches (mm), min.	22 1/8 (560)
Niche width in inches (mm), max.	22 1/2 (570)
Niche height in inches (mm), min.	69 7/8 (1772)
Niche height in inches (mm), max.	70 1/2 (1788)
Niche depth in in.(mm)	21 3/4 (550)
Appliance width in in.(mm)	22 (559)
Appliance height in in.(mm)	69 5/8 (1770)
Appliance depth in in.(mm)	21 1/2 (546)
Weight in lbs.(kg)	165 (74.4)
Type of mounting	Fixed door
Maximum fridge compartment door front weight in lbs. (kg)	40 (18)
Maximum freezer compartment door front weight in lbs. (kg)	27 (12)
Climate range	SN-T
Fridge compartment volume in cu. ft. (l)	6.18 (175)
including PerfectFresh zone in l	2.51 (71)
4-star freezer compartment volume in cu. ft. (l)	2.51 (71)
Total usable capacity in cu. ft. (l)	8.69 (246)
Storage time in case of fault in h	9
Sound emissions in dB(A) re 1 pW	34
Current consumption in milliampere (mA)	3000
Voltage in V	115
Fuse rating in A	10
Number of phases	1
Frequency in Hz	60
Wire length in ft (m)	7 (2.2)
Replacing bulbs	Customer Service
<b>Standard accessories</b>	
Egg rack	•
Water filter	Nein
PerfectFresh organization box	•

## KFN 7795 D


Built-in bottom-mount units, 70 in (178 cm) niche height

PerfectFresh Active, DynaCool, and IceMaker for outstanding appearance.

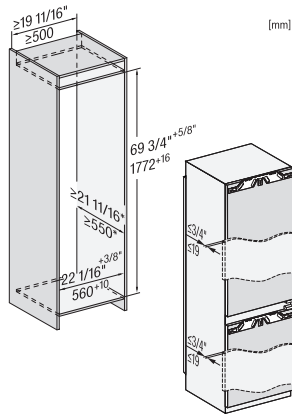


KFN7734D, KFN7734C, KFN7784D, KFN7795D, built-in (US)

\*The declared energy consumption was calculated in a 560 mm deep niche. The appliance is fully functional in a 550 mm niche but the energy consumption will be slightly higher.

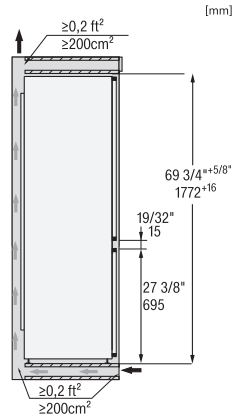

KFN7734D, KFN7734C, KFN7784D, KFN7795D, side view (US)

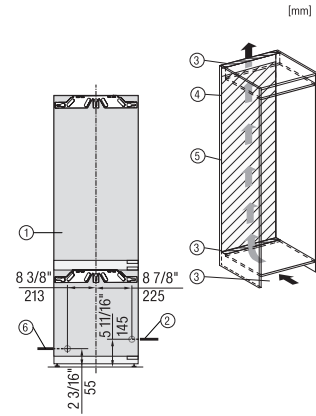

KFN7795D, installation (US)

1. View from the front, 2. Mains connection cable, L = 2100 mm, 3. Ventilation cut-out min. 200 cm<sup>2</sup>, 4. Ventilation, 5. No connections permitted in this area, 6. Water connection L = 2000 mm