
INSTALLATION INSTRUCTIONS

AMERICAN STANDARD

Dual Control Wall Mount Lavatory Rough
Model D35000450

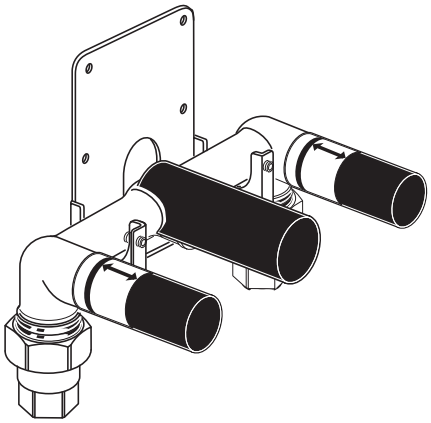

Thank you for selecting DXV by American Standard. To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.

SAVE FOR FUTURE USE

RECOMMENDED TOOLS AND MATERIALS

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing, supply stores. It is essential that the tools and materials be on hand before work is begun.




Channel Locks




Adjustable Wrench



Teflon Tape



Plumbers' Putty or Caulking





Phillips Screwdriver

Flat Blade Screwdriver

ROUGHING-IN DIMENSIONS:

- To assure proper positioning in relation to wall, note roughing-in dimensions.

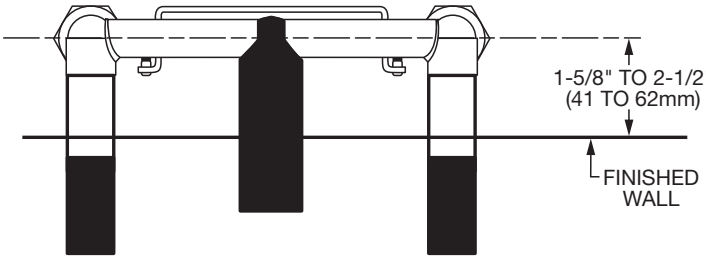

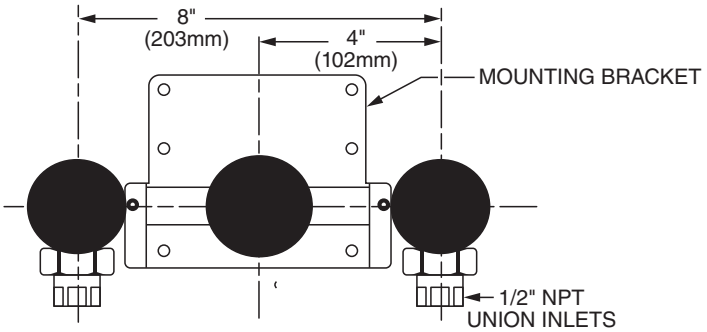

NOTE: MOUNTING HOLES ARE 1-3/8" D. (35mm)

In the United States:
DXV by American Standard
One Centennial Avenue
Piscataway, New Jersey 08855
Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734
www.DXV.com

In Canada:
DXV by American Standard
5900 Avebury Road
Mississauga, Ontario
L5R 3M3
Canada

Toll Free: 1-800-387-0369
Local: 905-306-1093
Fax: 1-800-395-1498
www.DXV.ca

In Mexico:
DXV by American Standard
Via Morelos 330
Col. Santa Clara Coatitla
Ecatepec, Estado de México 55540

Toll Free: 01-800-8391200
www.DXV.mx


Product names listed herein are trademarks of AS America, Inc.
© AS America, Inc. 2015

M965578 Rev. 1.2 (6/15)

1 INSTALL WALL BRACKET

- Determine where the finished wall location will be. ***This measurement is very important!*** Note: The rough-in measurement from the finished wall is; 1-9/16" (40mm) minimum and 2-7/16" (62mm) maximum. This is a 7/8" (22mm) tolerance. See rough-in illustration above.

- Secure WALL BRACKET **(1)** to cross brace of wall structure at required height using six wood screws.

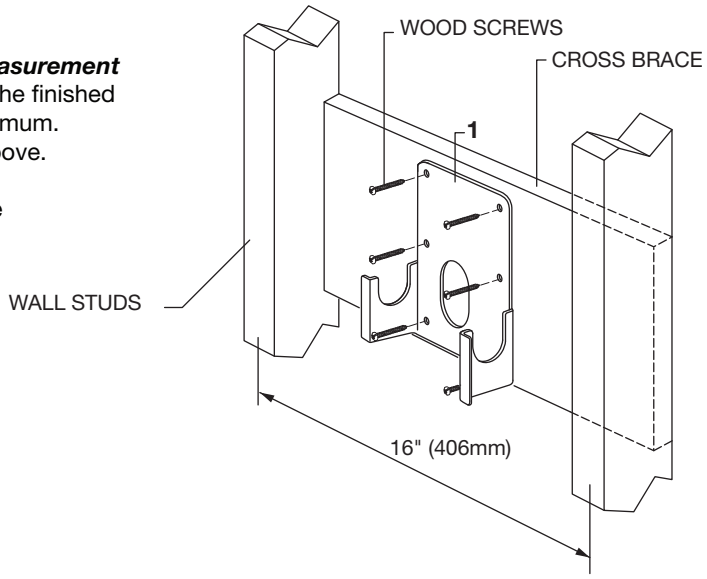


2 INSTALL VALVE BODY

- Mount VALVE BODY **(1)** to WALL BRACKET **(2)** as shown. Level and tighten SET SCREWS **(3)** to secure VALVE BODY **(1)** to WALL BRACKET **(2)**.

- Connect HOT water supply to LEFT INLET UNION **(4)** and COLD water supply to RIGHT INLET UNION **(5)**. Pipe connections are 1/2" (13mm)NPT. Use sealant or Teflon tape on pipe connections. Do not solder directly to valve body.

- With valves closed open supply lines and check for leaks. Remove PLASTER GUARDS **(6)** and open both valves and check for leaks.

- Close both valves and turn off water supplies. Replace PLASTER GUARDS **(6)** and finish wall construction.

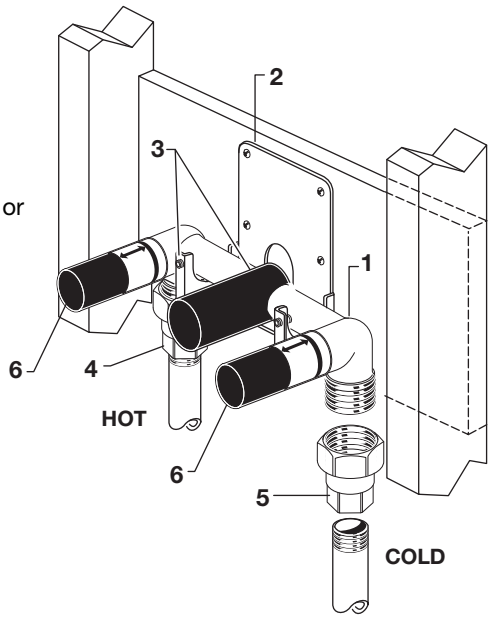


AMERICAN STANDARD

Dual Control Wall Mount Lavatory Rough

MODEL NUMBER

D35000450

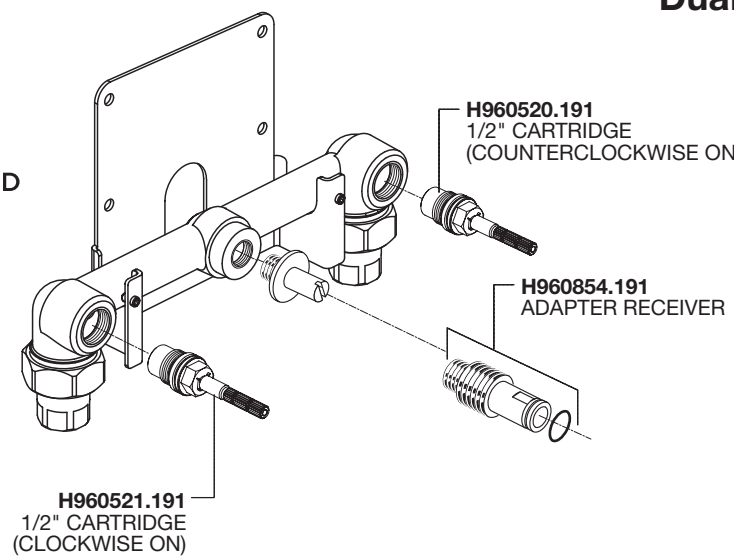

M965578 Rev. 1.2 (6/15)