



SPECIFICATIONS

AP-300

SERIES

RANGE HOOD



300 CFM/1.5 Sones @ 0.10" SP.

Hood Dimensions

Overall bottom projection - 24"
Available heights (without Soffit) - 10" and 18"
Available widths: 30" and 36"

Hood

Stainless steel. Wall mounted. Install at least 24" above the cooking surface.

Lighting

3 - PAR16, 3.125" in length, type A, screw-in base, 45 watt maximum Halogen lamps (included).

Ducting Options

Vertical outlet only. Vertical or Horizontal ducting transition achieved through vertical or horizontal duct adapter (included).

Filters





Aluminum grease filters (included).

Blower

Single speed, permanently split capacitor motor. Rated 120 volts, 60 hz.

Blower Wheel

Dual inlet, electronically balanced polymeric centrifugal blower wheels, 57/8" width 59 paddles.

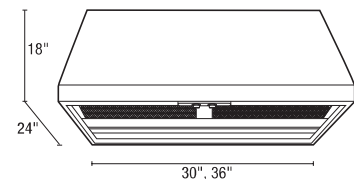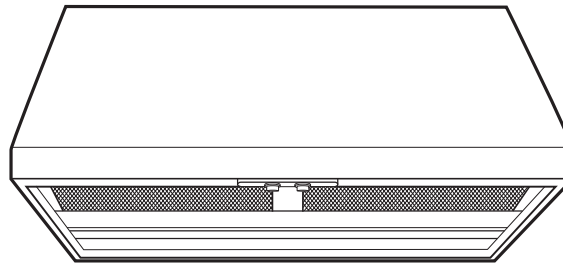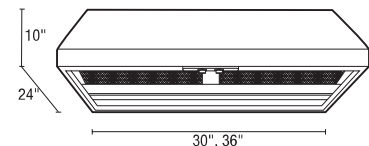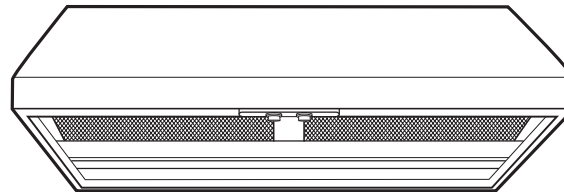

EXPANDED PERFORMANCE

	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Apms
	0	0.1	0.20	0.25	0.3	0.375				
Air Flow - CFM	317	300	279	267	253	229	1.5	798	95.0	.90

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada: 8 Edvac Drive
Brampton, Ontario L6S 5P2
Tel: (905) 456-2033 • 800-250-8767
Fax: (905) 456-1015