

Futura Series

Fully Integrated Dishwashers

CLASSIC PLUS G 4975 Vi, G 4975 Vi SF, G 4975 SCVi, G4975 SCVi SF

CRYSTAL G 6165 SCVi, G 6165 SCVi SF DIMENSION G 6365 SCVi, G 6365 SCVi SF

LUMEN G 6565 SCVi, G 6565 SCVi SF, G 6595 SCVi K20

DIAMOND G 6985 SCVi K20








| SPECIFICATIONS | | | | | |
|--------------------------------------|--|--|--|--|--|
| | | | | | |
| Overall Unit Width | 23 ⁹ / ₁₆ " (598mm) | | | | |
| Overall Unit Height | 33 ¹¹ / ₁₆ " - 36 ¹ / ₄ " (855 - 920mm) | | | | |
| Overall Unit Depth | 22 ⁷ / ₁₆ " (570mm) | | | | |
| Niche | | | | | |
| Minimum Cabinet Opening Width | 23 ⁵ / ₈ " (600mm) | | | | |
| Minimum Cabinet Opening Height | 33³/₄" (857mm) | | | | |
| Minimum Cabinet Opening Depth | 22 ⁷ / ₁₆ " (570mm) | | | | |
| Plumbing | | | | | |
| Water Supply Requirements | May be connected to a cold or hot water supply up to a maximum of 140°F/60°C. Must be connected to a shut-off valve with a male 3/8" compression. The water shut-off valve must be accessible after installation. The water pressure must be between 4.35 psi (0.3 bar) and may not exceed 145 psi (10 bar). If the pressure is higher than 145 psi (10 bar), a pressure reducing valve must be installed. | | | | |
| Water Connection Line | 4' 11" (1.5m) flexible water intake hose is supplied with a 3/8 compression connection. | | | | |
| Drain Hose | 4' 11" (1.5m) flexible drain hose is supplied. | | | | |
| Electrical | | | | | |
| Electrical Requirements - Volts/Amps | 110V / 120V, 60Hz, 15 Amps | | | | |
| Power Cord - Plug and length | Yes - NEMA 5-15 plug, 5' 6" (1.7m), Convertible to Hardwire | | | | |
| Shipping | | | | | |
| Shipping Weight | 118 lbs (53.5kg) | | | | |
| Support | | | | | |
| Call Miele | 800.843.7231 | | | | |
| Miele Website | ூwww.mieleusa.com | | | | |
| 20/20 Link | ⁴02020technologies.com | | | | |



INSTALLATION SPECIFICATIONS

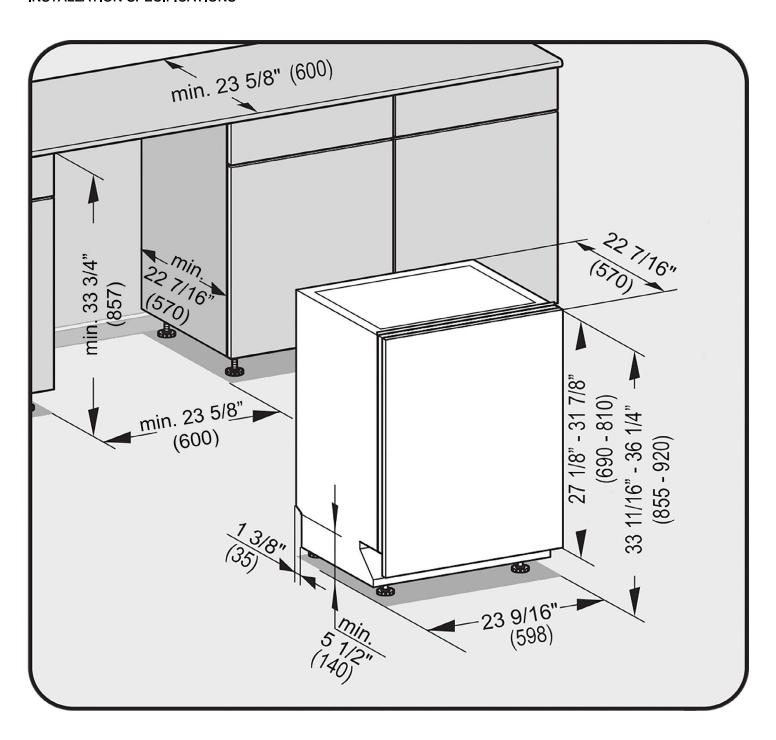


Futura Series

Fully Integrated Dishwashers



Custom Panel Istallation

Some Miele dishwashers do not come equipped with a front panel. These dishwashers are designed to accept a custom door panel supplied by a cabinet maker. Miele has a unique panel integration system which allows the dishwasher to align with the surrounding cabinets.

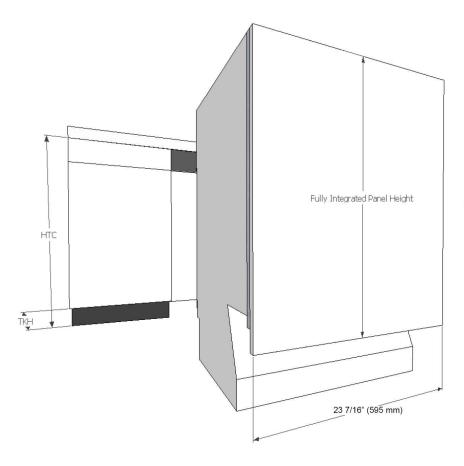

Width: 23 7/16" (595 mm) in all Cases
Thickness: 3/4" (19 mm) in all Cases
Height: Determined using the following

calculation:

Panel Height = HTC - TKH

HTC = Height to the underside of countertop

TKH = Toe kick height

Note: Control panel is along the top edge of the unit. It is not visible when the unit is closed. A handle MUST be located on front of panel in order to open unit. (Except K2o models).

Maximum panel height: 31 7/8" (810 mm)

Minimum panel height: 27 1/8" (690 mm)

Maximum panel weight: 21 lbs (9.5 kg)

GFVI Installations

Miele offers pre-fabricated stainless steel panels for all fully integrated units. These panels are designed for various toe-kick heights and offer a choice of handel options. See Miele Product Brochure for more info.

Futura Series Fully Integrated Dishwashers



Acceptable Height Istallation

| | | Height to underside of countertop | | | | | | | | | |
|-------|---|--|--|--|--|---|---|---|---|---|-------|
| | 33 3/4 | 34 | 34 1/4 | 34 1/2 | 34 3/4 | 35 | 35 1/4 | 35 1/2 | 35 3/4 | 36 | |
| 2 1/2 | | | | | | | | | | | |
| 3 | | | | | | | | | | | |
| 3 1/2 | | | | | | | | | | | |
| 4 | | | | | | | | | | | |
| 4 1/2 | | | | | | | | | | | |
| 5 | | | | | | | | | | | |
| 5 1/2 | | | | | | | | | | | |
| 6 | | | | | | | | | | | |
| 6 1/2 | | | | | | | | | | | |
| 7 | | | | | | | | | | | |
| 7 1/2 | | | | | | | | | | | |
| 8 | | | | | | | | | | | |
| 8 1/2 | | | | | | | | | | | |
| | | | | Acconta | blo comi | oination | | | | | |
| | | | | Accepta | DIE COIII | JillatiOII | • | | | | |
| | | | | Typical | Americar | n installa | tion | | | | |
| 3 | 3 3 1/2 4 4 1/2 5 5 1/2 6 5 1/2 7 7 1/2 8 | 2 1/2 3 3 1/2 4 4 1/2 5 5 1/2 6 5 1/2 7 7 1/2 8 | 2 1/2 3 3 1/2 4 4 1/2 5 5 1/2 6 5 1/2 7 7 1/2 8 | 2 1/2 3 3 1/2 4 4 1/2 5 5 1/2 6 6 1/2 7 7 1/2 8 | 2 1/2 3 3 1/2 4 4 1/2 5 5 1/2 6 6 1/2 7 7 1/2 8 8 3 1/2 Accepta | 2 1/2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 | 2 1/2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 | 2 1/2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 | 2 1/2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 | 2 1/2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 | 2 1/2 |