

SONAMP® DSP AMPLIFIERS

DSP 2-150, DSP 8-130 & DSP 2-750 MULTI-CHANNEL POWER AMPLIFIERS



Product Overview

Building on the legacy of the SONAMP 260, the industry's first purpose-built distributed audio amplifier, Sonance is pleased to announce the next generation of class-leading amplifiers. The new DSP amplifier line delivers game changing features, audiophile grade circuitry, robust power and unrivaled installation flexibility.

At the heart of the SONAMP DSP amplifier is the SONARC (Sonance Advanced Room Correction) web interface featuring 100+ **Sonance designed DSP presets**, preloaded for effortless DSP without the need for additional hardware or calibration and a built in 10-band parametric EQ allows for optional DSP customization.


Features and Benefits

- High resolution 24 bit/96 kHz processing DAC capable of 4608 KBPS audio playback.
- IP and IR controllable via SONARC for the ultimate in installation flexibility.
- Powerful, audiophile grade Class-D amplification, rated and certified at 8 and 4 ohms & stable to 2 ohms.
- Convection cooled, fanless* design allows for direct stacking with no air gap for even greater power density.
*(DSP 2-750 has a variable speed fan)
- Compact form factor allows for space savings in the equipment rack with ample power to the speakers.
- Class-D design is 93% efficient for maximum power output with minimal power usage. Meets EU power saving standards.
- Full array of input/output connectivity for maximum installation flexibility: Line input/loop outputs; IP, IR, audio and voltage triggers; Ethernet jack for network connectivity.
- Terminal blocks will accept up to 12AWG speaker cable for longer runs and higher performance.
- Bridgeable channels for applications when even more power is required.
- Certified to worldwide safety standards. (TUV to UL standards, CE, RCM, C-Tick, RoHS, WEEE). Meets FCC standards.
- Rack ears and removable feet included.

DSP 2-150



DSP 8-130

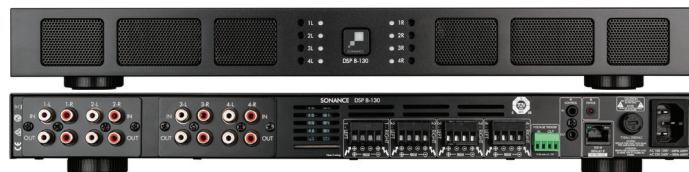

DSP 2-750






DSP 2-150 Dimensions

Dimensions with Feet


Width: 8 5/8" (219mm)
 Height: 2 1/8" (54mm)
 Depth: 16 13/16" (427mm)

Dimensions with Rack Ears & without Feet

Width: 19" (482mm)
 Height: 1 3/4" (44mm)
 Depth: 16 13/16" (427mm)

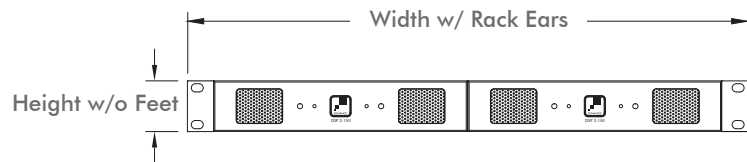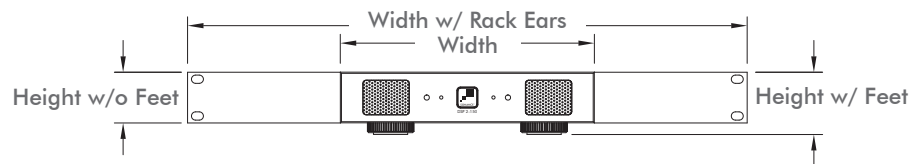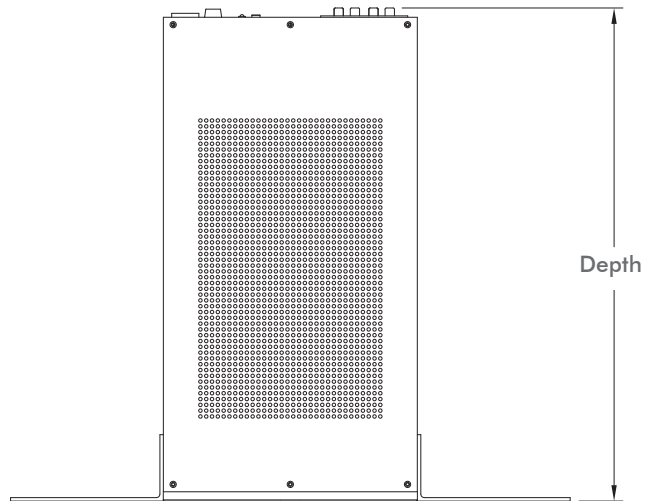

(2) DSP 2-150 amplifiers shown
 with optional Rack Mount Bracket

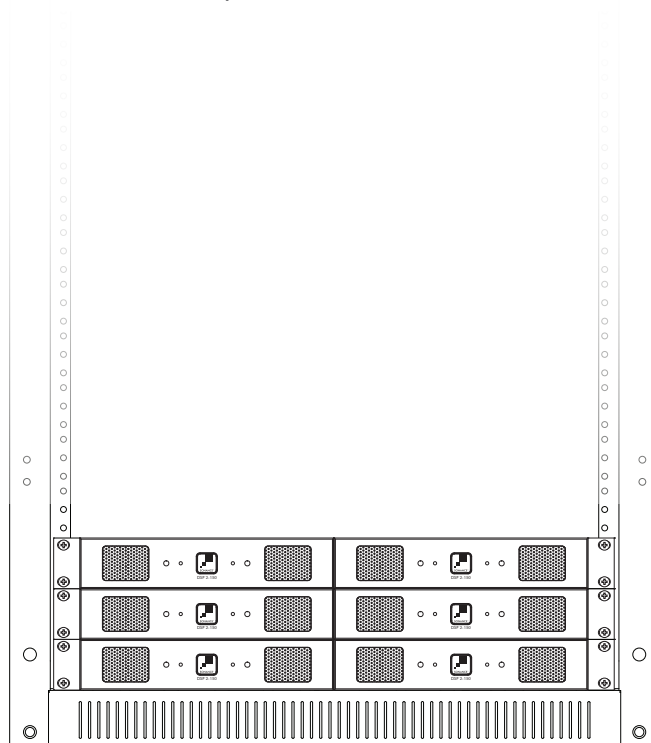

- Compact form factor allows for space savings in the equipment rack with ample power to the speakers
- Convection cooled, fanless design allows for direct stacking with no air gap for even greater power density.
- Class-D design is 93% efficient for maximum power output with minimal power usage.
- Rack ears and feet included.


Shown with optional Rack Mount Bracket



SPECIFICATIONS

DSP 2-150

SKU	93093
UOM	Each
Number of Channels	2 (1 stereo pair)
Power Output (RMS):	
RMS per channel @ 8 ohms	150 Watts (2 channels driven)
RMS per channel @ 4 ohms	224 Watts (2 channels driven)
RMS per channel Bridged @ 8 ohms	473 Watts
Frequency Response	5Hz – 50kHz
Total Harmonic Distortion (THD):	
(1kHz) @ 8 ohms	0.07%
(1kHz) @ 4 ohms	0.06%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	5A (T5-AL ~ 250V)
Dimensions w/ Feet (W x H x D)	8 5/8" x 2 1/8" x 16 13/16" (219mm x 54mm x 427mm)
Dimensions w/ Rack Ears w/o Feet (W x H x D)	19" x 1 3/4" x 16 13/16" (482mm x 44mm x 427mm)
Rack Space Requirement	1U
Shipping Weight	11 lbs (5.0kg)

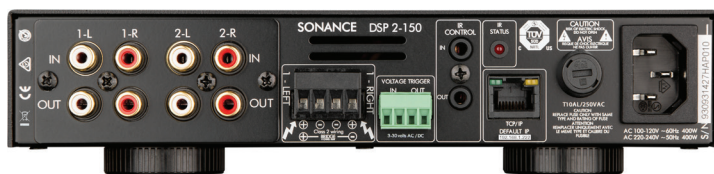


DSP 8-130 Dimensions

Dimensions with Feet

Width: 17 1/4" (438mm)
Height: 2 1/8" (54mm)
Depth: 16 13/16" (427mm)

Dimensions with Rack Ears & without Feet

Width: 19" (482mm)
Height: 1 3/4" (44mm)
Depth: 16 13/16" (427mm)

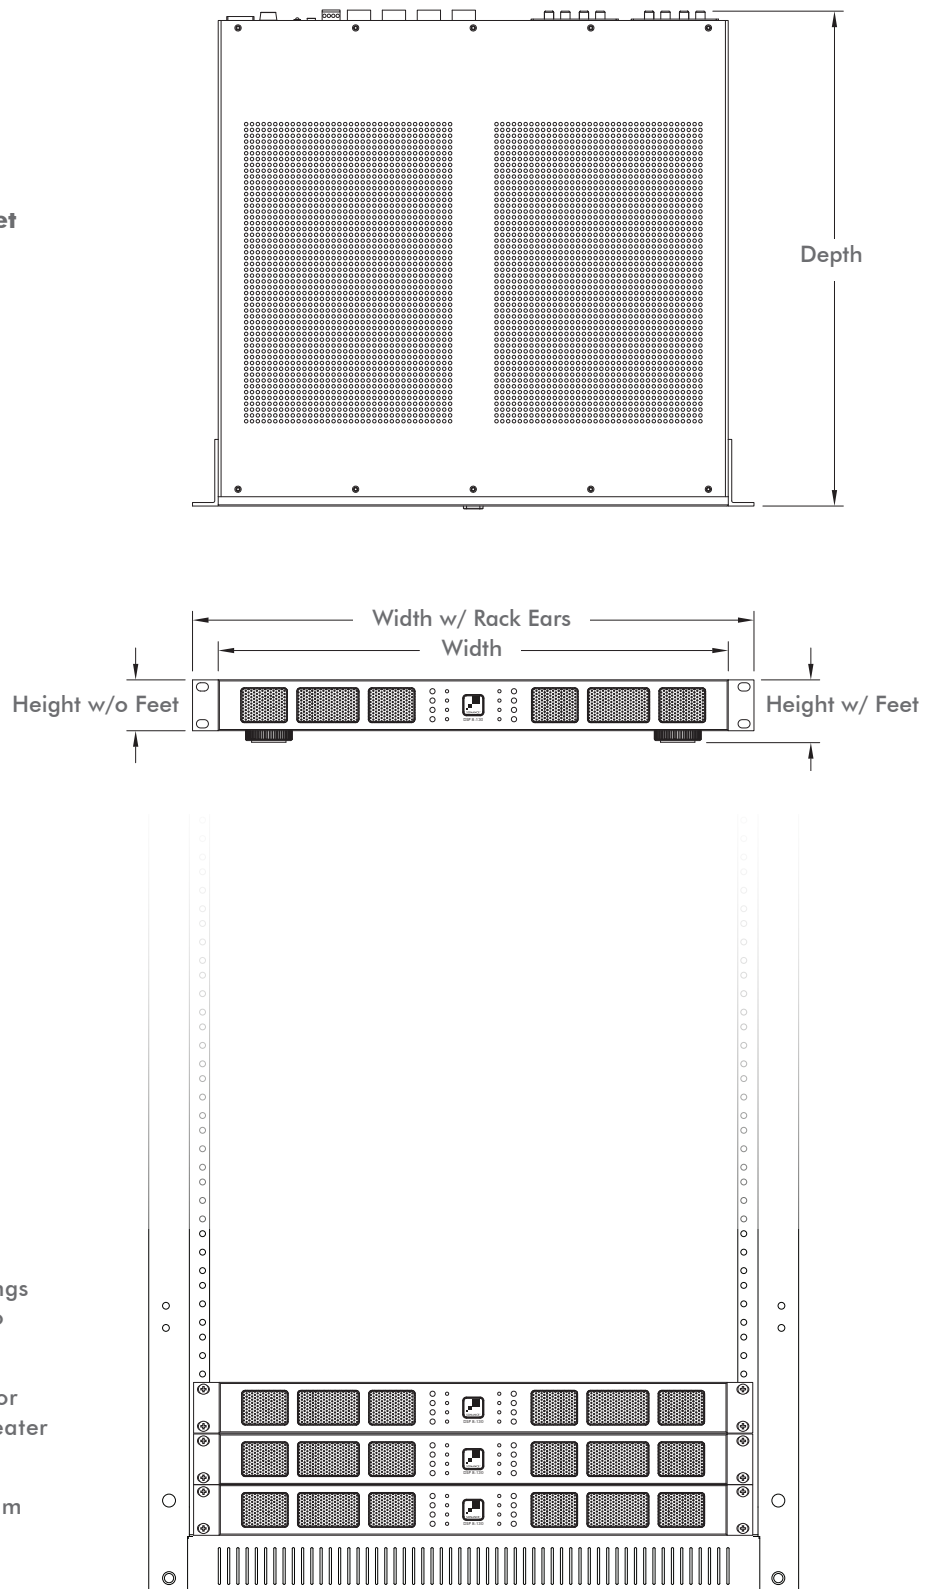

- Compact form factor allows for space savings in the equipment rack with ample power to the speakers
- Convection cooled, fanless design allows for direct stacking with no air gap for even greater power density.
- Class-D design is 93% efficient for maximum power output with minimal power usage.
- Rack ears and feet included.



SPECIFICATIONS

DSP 8-130

SKU	93094
UOM	Each
Number of Channels	8 (4 stereo pairs)
Power Output (RMS):	
RMS per channel @ 8 ohms	130 Watts (8 channels driven)
RMS per channel @ 4 ohms	145 Watts (8 channels driven)
RMS per channel Bridged @ 8 ohms	300 Watts
Frequency Response	5Hz – 50kHz
Total Harmonic Distortion (THD):	
(1kHz) @ 8 ohms	0.1%
(1kHz) @ 4 ohms	0.03%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	15A (T15-AL ~ 250V)
Dimensions w/ Feet (W x H x D)	17 1/4" x 2 1/8" x 16 13/16" (438mm x 54mm x 427mm)
Dimensions w/ Rack Ears w/o Feet (W x H x D)	19" x 1 3/4" x 16 13/16" (482mm x 44mm x 427mm)
Rack Space Requirement	1U
Shipping Weight	18 lbs (8.2kg)




DSP 2-750 Dimensions

Dimensions with Feet


Width: 17 1/4" (438mm)
Height: 3 7/8" (98mm)
Depth: 17 7/32" (437mm)

Dimensions with Rack Ears & without Feet

Width: 19" (482mm)
Height: 3 1/2" (88mm)
Depth: 17 7/32" (437mm)

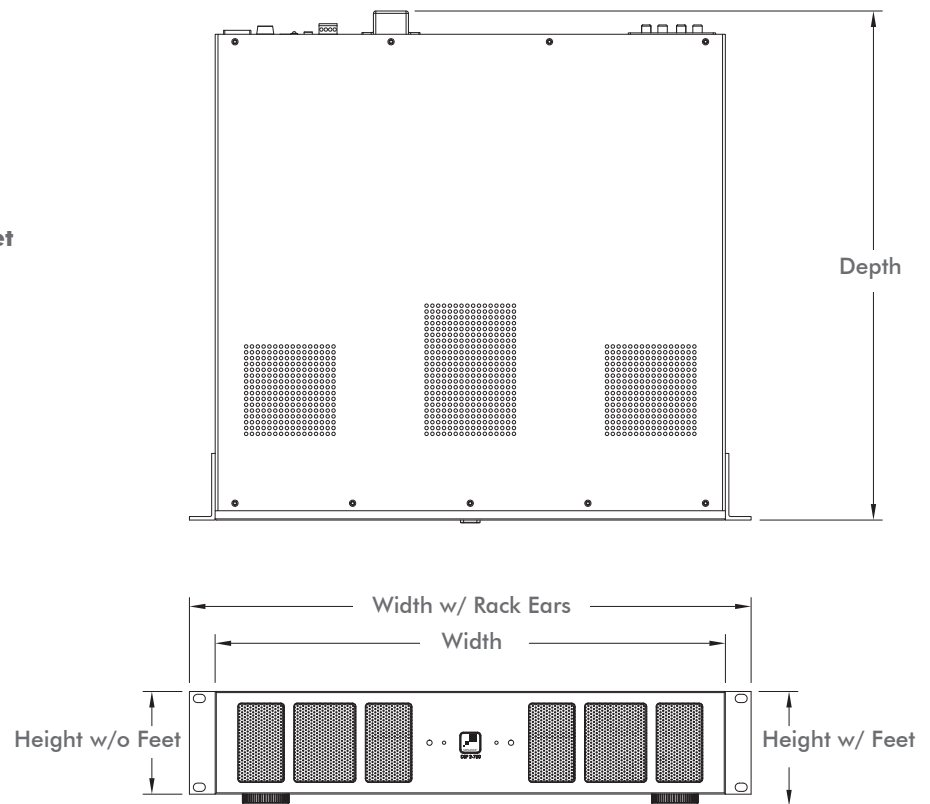

- Compact form factor allows for space savings in the equipment rack with ample power to the speakers
- Direct stacking with no air gap for even greater power density.
- Class-D design is 93% efficient for maximum power output with minimal power usage.
- Rack ears and feet included.

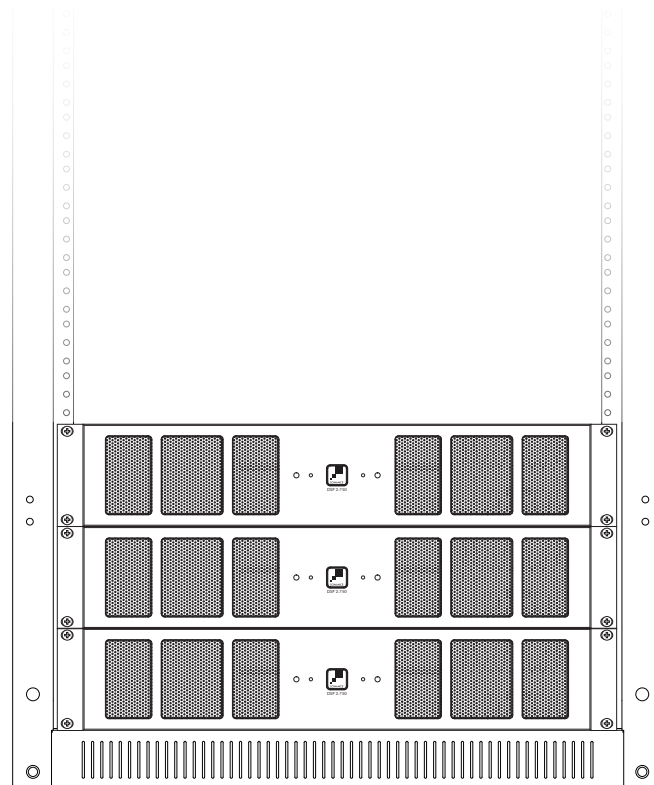



SPECIFICATIONS

DSP 2-750

SKU	93095
UOM	Each
Number of Channels	2 (1 stereo pair)
Power Output (RMS):	
RMS per channel @ 8 ohms	500 Watts (2 channels driven)
RMS per channel @ 4 ohms / 70V	750 Watts (2 channels driven)
RMS per channel Bridged @ 8 ohms	2000 Watts
Frequency Response	5Hz – 50kHz
Total Harmonic Distortion (THD):	
(1kHz) @ 8 ohms	0.4%
(1kHz) @ 4 ohms	0.3%
AC Voltage	100-120V@60Hz, 220-240V@50Hz
AC Fuse	15A (T15-AL ~ 250V)
Dimensions w/ Feet (W x H x D)	17 1/4" x 3 7/8" x 17 7/32" (438mm x 98mm x 437mm)
Dimensions w/ Rack Ears w/o Feet (W x H x D)	19" x 3 1/2" x 17 7/32" (482mm x 88mm x 437mm)
Rack Space Requirement	2U
Shipping Weight	23.3 lbs (10.6kg)






Associated Products

Rack Mount Bracket for
Sonamp 2-100 & DSP 2-150

SKU# 93098

*Note: Allows two 1/2 rack width amps to be
rack mounted together in a 1U rack space.*



ASAP3D SE
(Special Applications Amplifier)



SONAMP DIGITAL AMPLIFIERS

2-100



12-50



LIMITED TWO (2) YEAR WARRANTY

Sonance warrants to the first end-user purchaser that this Sonance-brand product ("Product"), when purchased from an authorized Sonance Dealer/Distributor, will be free from defective workmanship and materials for two (2) years. Sonance will at its option and expense during the warranty period, either repair the defect or replace the Product with a new or remanufactured Product or a reasonable equivalent.



©2015 Sonance. All rights reserved.

Sonance and Sonamp are registered trademarks of Dana Innovations.

Due to continuous product improvement, all features and specifications are subject to change without notice.
For the latest Sonance product specification information visit our website: www.sonance.com

SONANCE • 212 Avenida Fabricante • San Clemente, CA 92672-7531 USA
(949) 492-7777 • FAX: (949) 361-5151 • Technical Support: (949) 492-7777
www.sonance.com

SONARC

05.01.15