



36" Gas Drop-In, Deep Sump Cooktop Specifications

- Product Weight – 53 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amp
- Always consult local and/or national electric and gas codes.
- Access to the underside of cooktop and junction box must be provided for inspection and service.
- Cooktop ships with 3/4" factory regulator.
- Overhead cabinetry should not exceed a 13" maximum depth.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- The absolute minimum horizontal distance between overhead cabinets installed to either side of the appliance must be no less than the maximum width of the appliance.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Recommended distance from rear edge of cooktop to nearest vertical combustible surface is 2-1/2" to backsplash or 3-1/8" to rear wall.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Allow 2-1/2" minimum clearance between bottom of cooktop chassis and all combustible surfaces including upper edge of drawer installed beneath cooktop.
- Beneath cooktop, allow 35-1/4" minimum width between cabinet sidewalls.
- A fixed shelf should not be installed beneath cooktop.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

NOTE: Refer to Product Installation Guide for detailed instructions on the web at electroluxusa.com.

5 Sealed Burner Configuration

Five burners, one 17,000 BTU, one 16,000 BTU, two 9,500 BTU and one 5,000 BTU provide the capacity to cook nearly any meal entirely on the cooktop. The burners are sealed for easy cleanup.

Interlocking Grates

Designed for cooking multiple dishes at varying temperatures on a single cooktop. Interlocking grates spread weight over a broad area providing a stable cooking surface.

Deep Sump Cooktop

The deep sump design of this cooktop contains spills for easy cleanup and creates a countertop-level cooking surface that simplifies maneuvering of oversized pots and pans.

Optional Accessories

Griddle

Heavy-duty, cast iron for durability and easy cleaning, it is ideal for cooking numerous foods simultaneously.

Simmer Plate

Coated with a porcelain matte finish, it is used with the simmer setting to help distribute heat evenly to the bottom of your cookware.

Wok Ring

Round black matte porcelain wok ring is strong and rigid to help stabilize a cooking wok on the grate.

36" GAS DROP-IN, DEEP SUMP COOKTOP

Configuration	5 Sealed Burners
---------------	------------------

FEATURES

Deep Sump Formed Stainless Steel Platform	Yes
Stainless Steel Finish Knobs	5
Sealed Power Burner™ – 17,000 BTU	1
Sealed Power Burner™ – 16,000 BTU	1
Sealed Burner – 9,500 BTU	2
Sealed Precision Burner™ – 5,000-750 BTU	1
Linear Flow Burner Valves	5
Interlocking Grates	3

ACCESSORIES

Griddle - 318251603	Optional
Wok Ring - 318254301	Optional
Simmer Plate - 318254200	Optional
Black Textured Knob Kit - 318242223	Optional

SPECIFICATIONS

Cutout Dimensions –	
Height	8" min.
Width	33-7/8" min. 34-1/4" max.
Depth	19-1/8" min. 19-3/4" max
Gas Inlet Location	Right Rear
LP Conversion Kit	Included
Voltage Rating	120V/15 Amp
Electrical Cable	Included
Product Weight	53 Lbs.
Shipping Weight	58 Lbs.
UPC (0-57112-)	09451-9


NOTE: Always consult local and/or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxusa.com.




Wok Ring



Simmer Plate



Griddle

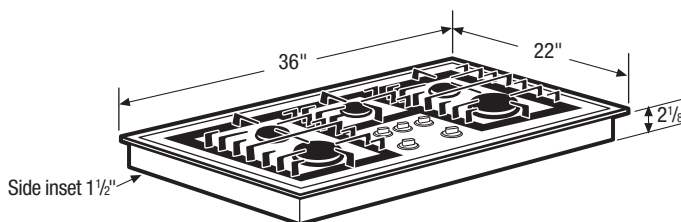

USA • 250 Bobby Jones Expressway • Augusta, GA 30907
1-877-4electrolux (1-877-435-3287) • electroluxusa.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4
1-800-668-4606 • electroluxca.com