

## QUICK REFERENCE GUIDE

HC24PHTX1

# 24" WALL CHIMNEY PYRAMID RANGEHOOD



This wall chimney pyramid vent hood has four speeds and quietly and effectively removes steam, smoke and smells from your kitchen. Soft-touch controls and easy to read settings make this simple to use. Bright halogen lighting ensures the entire cook surface is illuminated.



### A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W [fisherpaykel.com](http://fisherpaykel.com)

## FEATURES & BENEFITS

<b>Sized to Suit</b>	Designed to fit easily in your kitchen, you can select the right sized vent hood for your range or cooktop. Available in 24" width, this vent hood suits small kitchens.
<b>Effective and Quiet</b>	Odors can linger in the kitchen well after cooking is finished. Four fan speeds with up to 600CFM air movement ensure steam and smells are quickly removed.
<b>Designed to Match</b>	This vent hood is designed for durability and finished in stainless steel with a smooth, streamlined aesthetic that matches the rest of Fisher & Paykel's family of appliances.
<b>Easy Cleaning</b>	An interior, wipeable plate makes cleaning effortless and multi-layered filters trap grease effectively. Designed for simple removal, the filters are easy to clean and dishwasher safe.

<b>SKU Code</b>	50025
<b>UPC Code</b>	822843500253

## SPECIFICATIONS

<b>Finish</b>	Stainless steel
<b>Dimensions</b>	H(25 13/16" - 43 1/16") x W23 9/16" x D19 11/16"
<b>Fan ratings</b>	
Max. air movement	600CFM
Max. decibel rating	67dBA
<b>Performance</b>	
Extraction type	Surface
Fan speeds	4
<b>Cleaning</b>	
Dishwasher safe aluminium mesh filters	2
Stainless steel filter cover	●
<b>Installation</b>	
Two-piece height adjustable flue	●
Air outlet	6"
Ducted — top extraction	●
Recirculation — top extraction	●
<b>Controls</b>	
Control type	Soft-touch
Timer function	●
Light type	Halogen 2 x 50W
Supply voltage	120V
<b>Accessories</b>	
Ducting solution	●
Recirculation diverter	●
Recirculation carbon filter	●
<b>Manufacturer's warranty</b>	2 years




For full specifications visit [fisherpaykel.com](http://fisherpaykel.com)

**Fisher & Paykel**

Model no:

HC24PHTX1

Product Dimensions	in
Ⓐ Maximum height of rangehood	43 1/16"
Ⓑ Minimum overall height - recirculating	29 1/8"
Ⓒ Minimum overall height - ducted	26 3/4"
Ⓓ Overall width of rangehood	23 9/16"
Ⓔ Depth of rangehood chassis	19 11/16"
Ⓕ Height from bottom datum to top of lower chimney section	25 13/16"
Ⓖ Height of canopy	4 1/2"
Ⓗ Height of control panel	2 1/16"
Ⓘ Width of chimney	12 5/8"
Ⓛ Depth of chimney including rear bracket	11 7/16"
Ⓚ Ducting outlet diameter	6"
Ⓜ Distance from center of ducting outlet to rear datum	3 3/4"
Ⓝ Rear bracket depth	1/8"

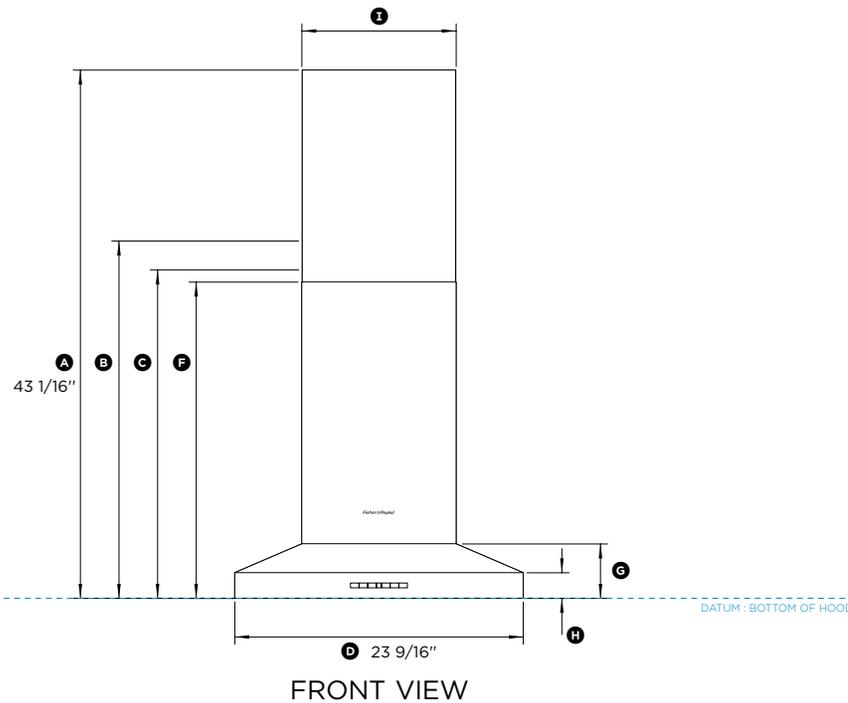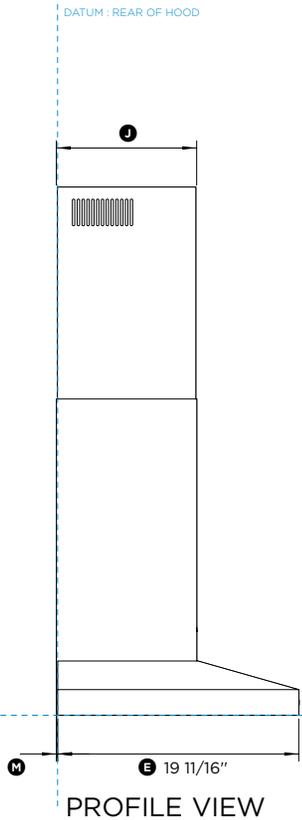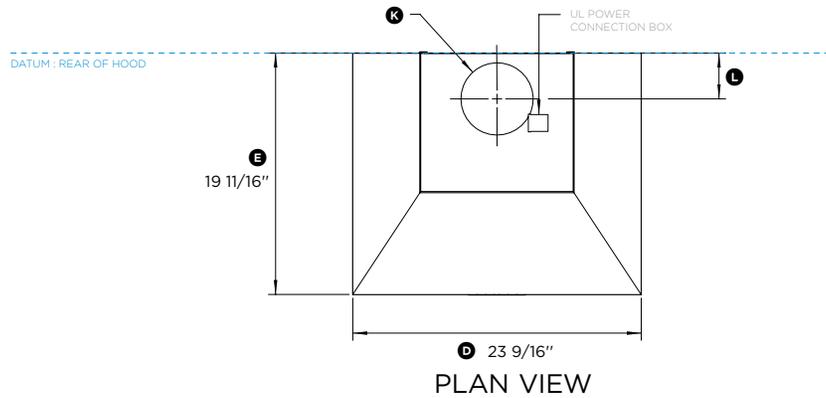

INDICATES PRODUCT DATUM -----


DATE: 12.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

Model no:

**HC24PHTX1**

Product Dimensions	in
Ⓐ Overall width of rangehood	23 9/16"
Ⓑ Depth of rangehood chassis	19 11/16"
Ⓒ Distance between light centers	16 1/4"
Ⓓ Distance from center of lights to rear of chassis	1 5/8"
Ⓔ Rear bracket depth	1/8"

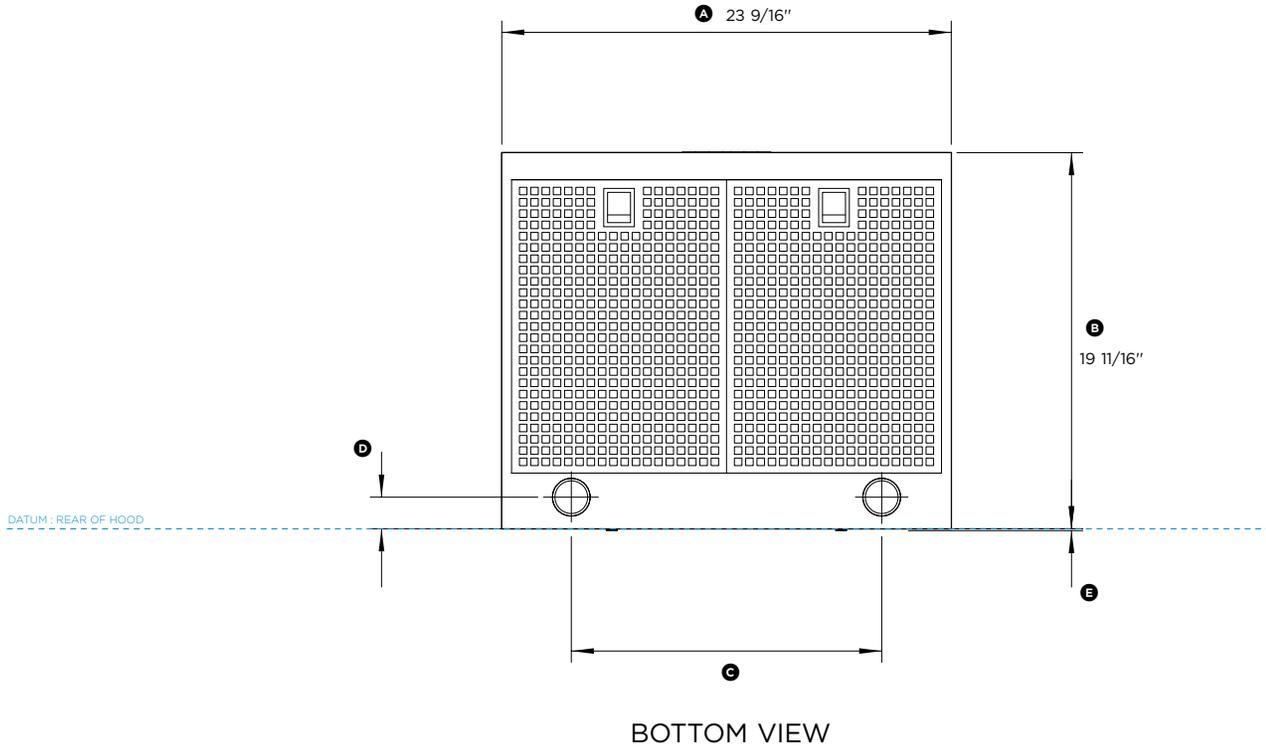

INDICATES PRODUCT DATUM -----

DATE: 12.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)