

## 30" Downdraft Hood Flush Mounting

DA 6881 Levantar



# 30" Downdraft Hood - Flush Installation

## DA 6881 Levantar



### DA 6881

#### Features:

- Very sleek and modern look
- Touch on glass controls
- LED ClearView lighting with dimmer functionality (1 x 6W)
- Telescopic downdraft system raises 16" over cooktop surface
- Four fan speeds (incl. intensive)
- Dishwasher-safe stainless steel filter hidden behind black glass panels
- Option of 500 CFM (DAG 600) internal blower or 1000 CFM (DAG 1000) external blower
- Vented or recirculating
- Delayed shutdown 5 or 15 minutes

#### SPECIFICATIONS

DA 6881 w/DAG600 — Item DA6881+internal

DA 6881 w/DAG1000 — Item DA6881+external

Overall Unit Width	30" (762 mm)
Overall Unit Height (Unextended)	25 <sup>11</sup> / <sub>16</sub> " (652 mm)
Overall Unit Height (Extended)	41 <sup>11</sup> / <sub>16</sub> " (1,058 mm)
Overall Canopy Height	16" (406 mm)
Overall Unit Depth	4 <sup>3</sup> / <sub>4</sub> " (120 mm)

#### Built-In

Minimum Opening Width	25 <sup>15</sup> / <sub>16</sub> " (659 mm)
Minimum Opening Depth	4 <sup>1</sup> / <sub>4</sub> " (108 mm)
Minimum Opening Height (Including Countertop)	25 <sup>13</sup> / <sub>16</sub> " (656 mm)

#### Fan

Fan Speeds	4
Maximum CFM	DA 6881 w/DAG 600 → 500 CFM DA 6881 w/DAG 1000 → 1000 CFM

#### Duct

Duct Diameter	DAG 600 → 6" (150 mm) DAG 1000 → 10" (254 mm)
---------------	--

#### Electrical

Electrical Requirements	120V, 60Hz, 15A
Power Cable	Ventilation system must be hard wired

#### Shipping


Shipping Weight	63 lbs (28.6 kg)
Shipping Dimensions	36 <sup>7</sup> / <sub>8</sub> " W x 30 <sup>5</sup> / <sub>8</sub> " H x 10 <sup>7</sup> / <sub>8</sub> " D

#### Support


Call Miele	800.843.7231
Miele Website	<a href="http://www.mieleusa.com">www.mieleusa.com</a>
20/20 Link	<a href="http://2020technologies.com">2020technologies.com</a>

If you are planning to install an oven in front of the appliance, the appropriate installation advice and dimensions regarding cool air circulation must be observed.

### STANDARD ACCESSORIES



Single Support Bracket for One Cutout Installation



Two Support Brackets for One or Two Cutout(s) Installation

# 30" Downdraft Hood - Flush Installation DA 6881 Levantar



## OPTIONAL ACCESSORIES



DAG 600

500 CFM Internal Blower



DAG 1000

1000 CFM External Blower



R2000

Reducing collar limits air flow to less than 300 CFM with DAG 600



DUU 2900

Recirculation kit for use with DAG 600




DKF18-1

Replacement OdorFree charcoal filter for DUU 2900

# 30" Downdraft Hood - Flush Installation DA 6881 Levantar



## PRODUCT SPECIFICATIONS

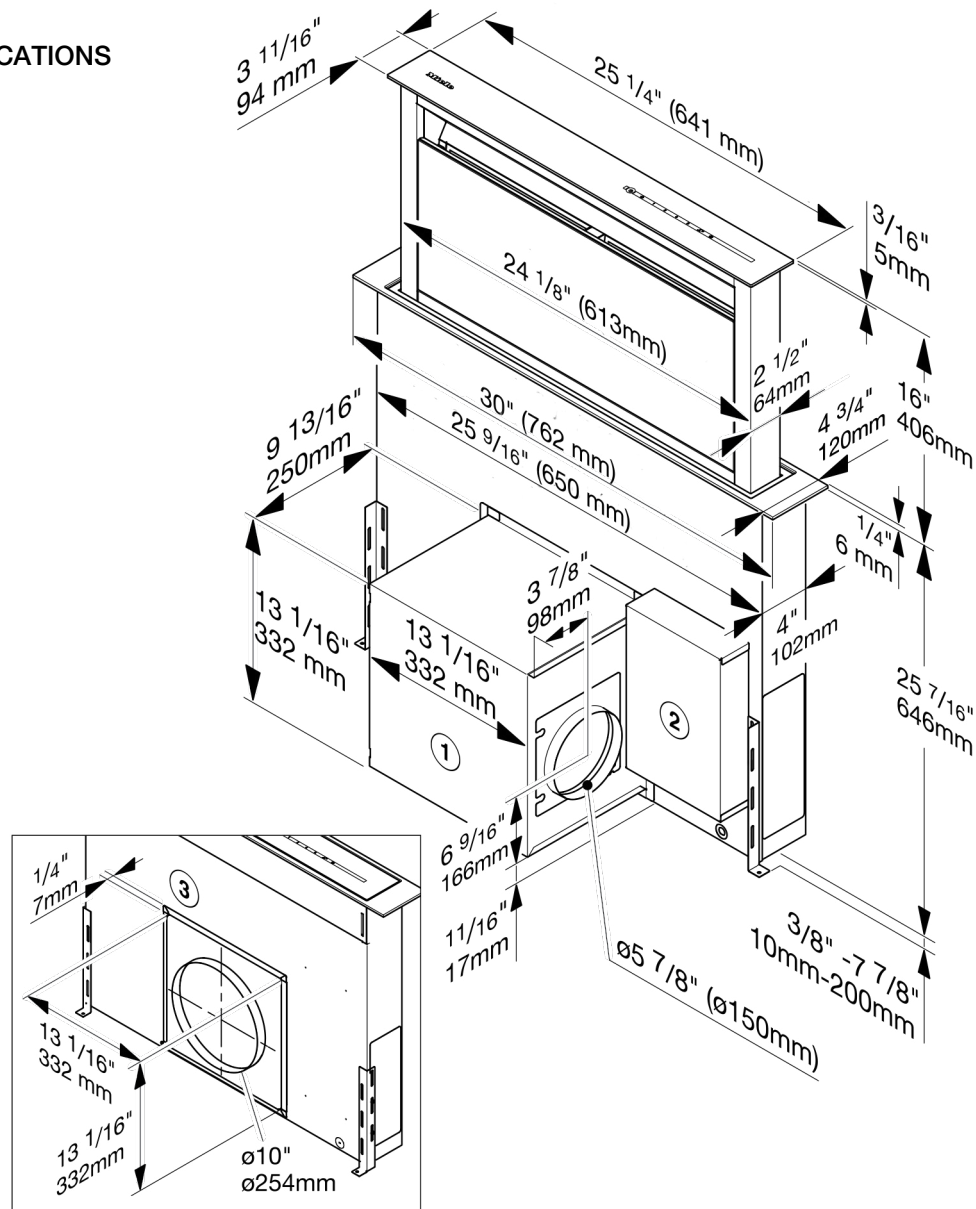

- ① The DAG 600 blower can be rotated and mounted with the exhaust air direction pointing up, to the left, to the right or down.
- ② The connection box can be positioned anywhere in the cabinet.
- ③ Cover for use with the DAG 1000 external blower.

The DAG 600 blower or the cover for the DAG 1000 blower can also be installed in the same position at the back of the appliance.

### Exhaust connection:

with internal DAG 600 blower: Ø 6" (150 mm).

with external DAG 1000 blower: Ø 10" (254 mm).

Please refer to the cooktop manufacturer's instructions when installing in combination with a cooktop. The installation and safety distance requirements must be maintained.

The total output of a multi-burner gas cooktop must not exceed 73,800 BTU, with no single burner exceeding 16,500 BTU. Gas cooktops with a greater output cannot be used in combination with this downdraft.

# 30" Downdraft Hood - Flush Installation


## DA 6881 Levantar



### TWO INDIVIDUAL CUTOUTS INSTALLATION SPECIFICATIONS

Cutout Dimensions for Two (2) Cutouts

- Flush Mount Installation
- Allows for Installation with Flush Mounted Downdraft in Combination with Flush or Proud Mounted Combisets and Cooktops

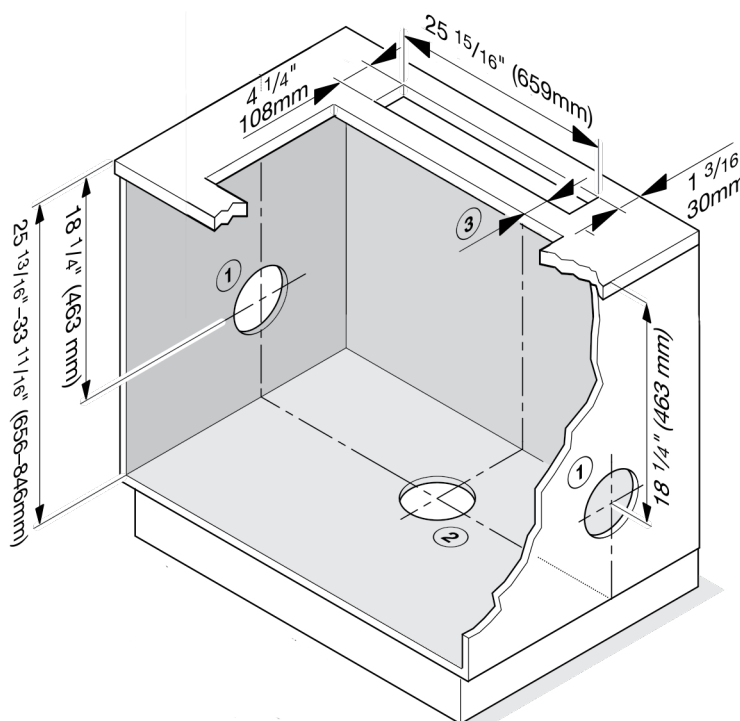

Exhaust or recirculation mode with DAG 600 blower installed at the front of the downdraft. Exhaust ducting (Ø 6" (150 mm))

- ① Exhaust ducting to the right or left.
- ② Exhaust ducting downwards.
- a) Overhang of the cooktop
- b) Cooktop cutout
- ③ If the downdraft and cooktop are installed in separate cutouts, ensure adequate stability of the strip in between.

If the blower is to be installed at the back of the downdraft, ensure that there is adequate space for installation.


# 30" Downdraft Hood - Flush Installation DA 6881 Levantar



## TWO INDIVIDUAL CUTOUTS INSTALLATION SPECIFICATIONS

Cutout Dimensions for Two (2) Cutouts


- Flush Mount Installation
- Allows for Installation with Flush Mounted Downdraft in Combination with Flush or Proud Mounted Combisets and Cooktops

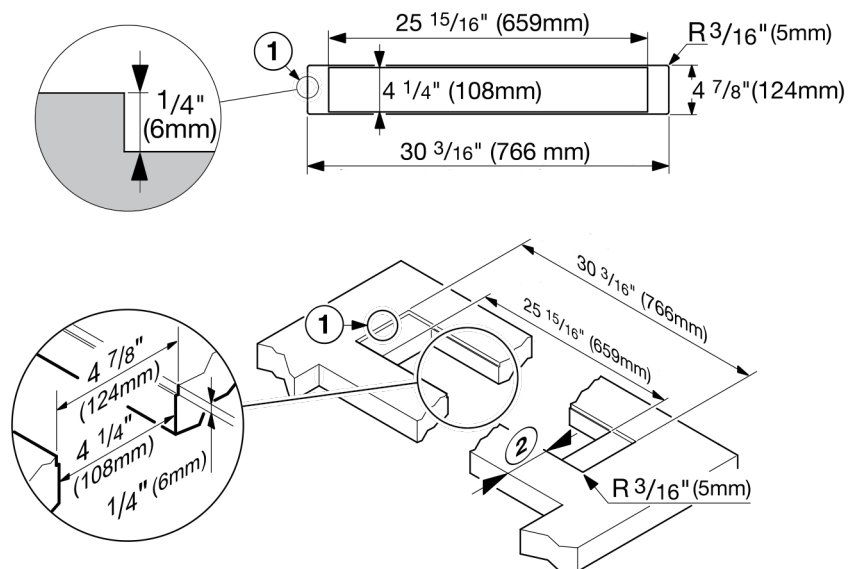

- ① Stepped cutout for flush-fit installation in stone worktops (granite, marble)
- ② If the downdraft and cooktop are installed in separate cutouts, ensure adequate stability of the strip in between.

## INSTALLATION SPECIFICATIONS

Two (2) Individual Cutout Support  
Brackets (Included)

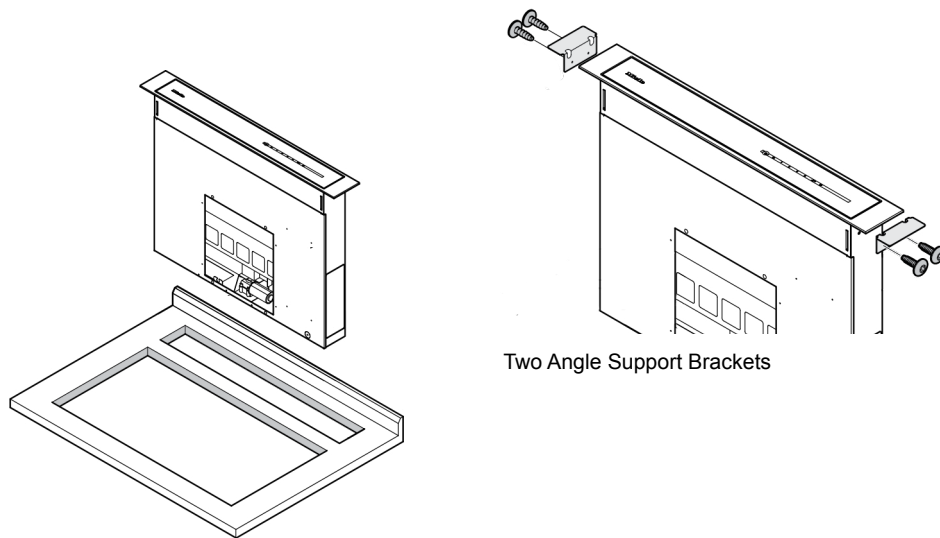


Two small angle brackets are mounted on the downdraft extractor. They serve as a support for the downdraft extractor when the downdraft extractor and cooktop are installed in two separate cutouts.

# 30" Downdraft Hood - Flush Installation DA 6881 Levantar



## EXTERNAL BLOWER DAG 1000 (Optional Accessory)

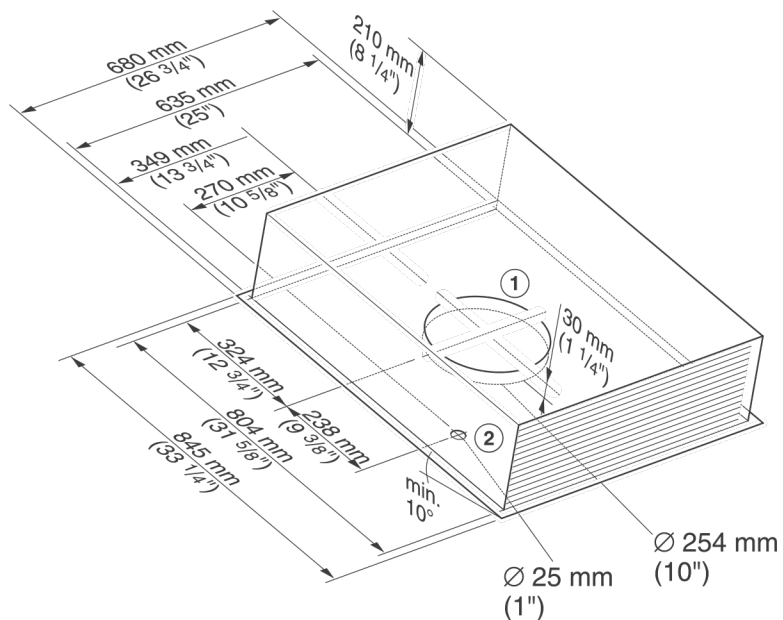

- ① Exhaust air connection
- ② Power cord feed-through (strain relief)


# 30" Downdraft Hood - Flush Installation

## DA 6881 Levantar




### EXTERNAL BLOWER DAG 1000 - CONTINUED

(Optional Accessory)

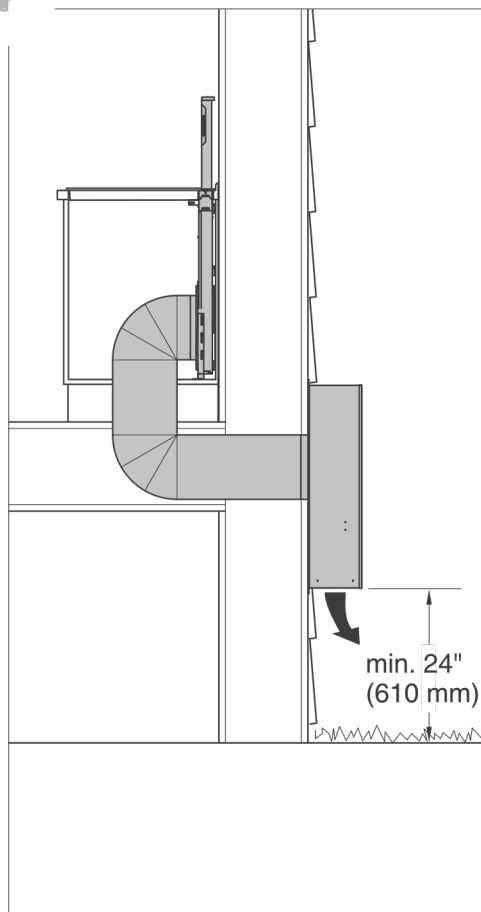

Example: Installation on an external wall

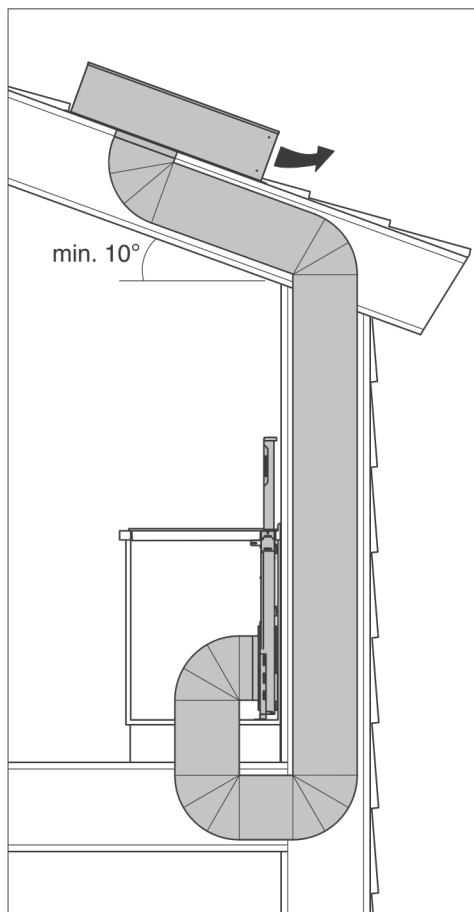


Example: Installation on a roof

The exhaust connection can be connected to either the front or back of the downdraft. For more information see the installation diagram for the downdraft.

# 30" Downdraft Hood - Flush Installation DA 6881 Levantar





## RECIRCULATION KIT DUU 2900 (Optional Accessory)

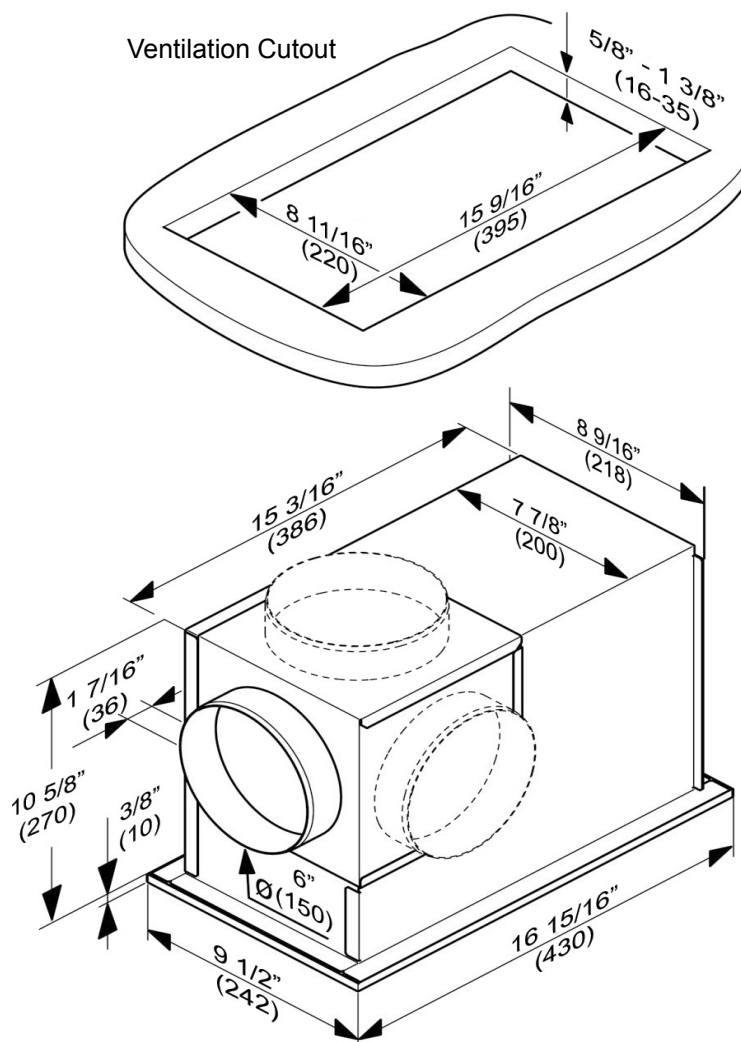

# 30" Downdraft Hood - Flush Installation DA 6881 Levantar



**R2000**  
(Optional Accessory)

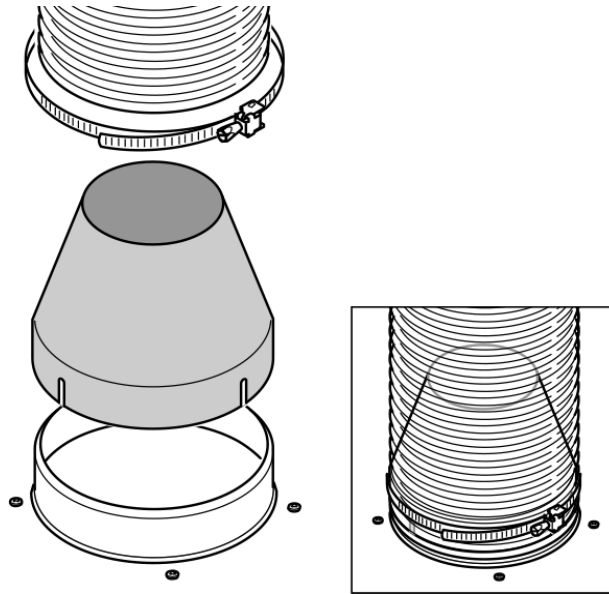

If you would like to reduce the environmental impact of your ventilation system by limiting the CFM output the Reducing Collar can be installed. It reduces the air flow to less than 300 CFM in use with DAG 600. Check local building codes for maximum CFM requirements.