


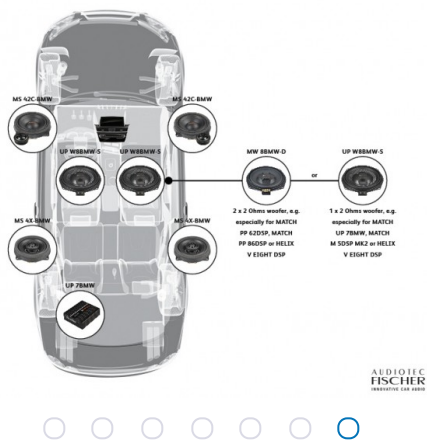

Order number: M122423
WEEE-Reg.-Nr. DE 29323089

Downloads

- > [BDA / Manual](#)
- > [Do you have any questions concerning this product?](#)

Specifications

Power RMS / max. 60 / 120 Watts Frequency response 100 Hz - 25,000 Hz...

Power RMS / max.	60 / 120 Watts
Frequency response	100 Hz - 25,000 Hz
Impedance	4 Ω
Efficiency 1 W / 1 m	90 dB
Cone material	TW: Silk dome M: - W: Coated paper
Crossover	Separate, 6 dB / 12 dB slope with bandstop filter
Outer diameter	TW: 43.3 mm / 1.71" M: - W: 119 mm / 4.69"
Installation diameter	TW: 41 mm / 1.61" M: - W: 80 mm / 3.15"
Installation depth	TW: 9.6 mm / 0.38" M: - W: 26.8 mm / 1.06"

Accessories 3 +



MW 8BMW-D



UP 7BMW



UP W8BMW-S

Similar products



MS 4X-BMW.1

* Unverbindliche Preisempfehlung des Herstellers