

COMMERCIAL

Refrigeration Equipment Merchandiser Freezer, 72 cu. ft, 3 Glass Door, black (R404a)



738310 (KCHGM72F)

3-glass door merchandiser freezer, black, 72 cubic feet, R404a refrigerant gas, -9°F

Short Form Specification

Item No.

3-glass door freezer with exterior back and bottom panel in galvanized steel, exterior side, and top in painted steel; interior back, side top and bottom panels in 304 stainless steel. Electronic control.

R404A gas in refrigeration circuit. ETL Safety and Sanitation certified. 3/5 Years warranty.

| | <u>୍</u> |
|---------|----------|
| | |
| TERA // | OMIM |
| TEM # | < |
| | |
| | Sector 1 |
| NODEL # | |
| | ш |
| | |
| NAME # | |
| | <u></u> |
| | |
| SIS # | Þ |
| bio # | |
| | - |
| | |
| NA # | |
| | |

Main Features

- External temperature display.
- Interior LED light to save energy and for best internal visibility.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
 Automatic Defrect Cooling System provides werry-free
- Automatic Defrost Cooling System provides worry-free performance.
- Heavy duty Vinyl coated steel shelves.
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Lockable door.
- Refrigerant type: R404a.
- Electronic control to select temperatures.
- Pre-wired heavy duty power cord.
- Heavy duty door hinges.
- Magnetic gasket removable without tools for easy cleaning.

Optional Accessories

| shelf for 48" and 72" (left/right) merchandiser | PNC 880594 | |
|---|------------|--|
| • middle shelf for 72" merchandiser | PNC 880595 | |

• shelf clips PNC 880611

APPROVAL:







| Supply voltage: | |
|------------------------|------------------|
| 738310 (KCHGM72F) | 220 V/1 ph/60 Hz |
| Electrical power, max: | 1 kW |
| Current consumption: | 1 Amps |
| Plug type: | USA NEMA L14-20P |
| | |

72

Key Information:

Capacity (Cu.Ft.) Door hinges: External dimensions, Width: External dimensions, Depth: External dimensions, Height: Number and type of doors: Internal Dimensions (depth): Internal Dimensions (height): Internal Dimensions (width): Shipping height: Shipping weight: Shipping volume: Number and type of grids (included): Type of external material: Type of internal material: Warranty:

Refrigeration Data


Compressor Horsepower: Refrigerant type: Refrigerant weight: Operating temperature min.: Operating temperature max.: Condenser type: Defrost type: Right Side 76 7/16" (1941 mm) 27 9/16" (700 mm) 59 1/16" (1501 mm) 3 Glass 27 9/16" 59 1/16" 76 7/16" 85 13/16" (2180 mm) 820 lbs (372 kg) 142.86 ft³ (4.05 m³)

12 - Vinyl-Coated Steel Black Prepainted Steel White Prepainted Aluminium 3 / 5 years

3/4 R404A 819 g -7.6 °F -4 °F Fin & tube Auto Defrost



The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

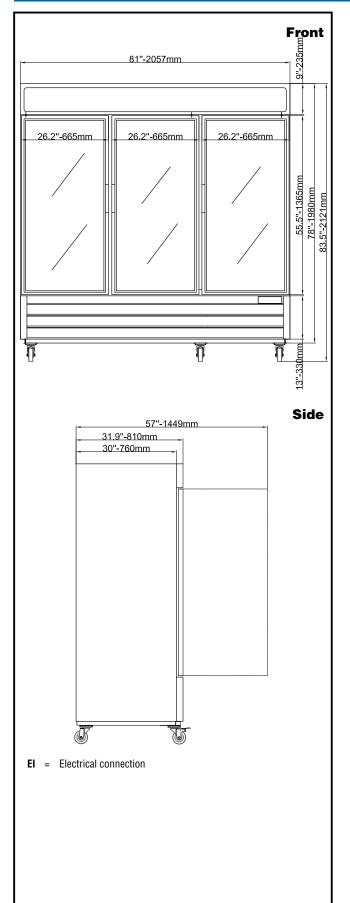

L25/250 NEMA-L14-20P