GAGGENAU



200 series flex induction cooktop
CI 292

CI 292 602M
Frameless, matte glass surface with black magnetic twist control knob.
Width 36″ (90 cm).

Optional accessories

CA 051 301
Teppan Yaki plate made of multi-ply material. For flex induction cooktop.

CA 230 100
Black magnetic twist control knob. For flex induction cooktop.

Combinable with:

AL 400 792
AW 442 720
AI 230 700
AW 230 790
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights

- Frameless for flush mounting only.
- Flex function for combining the rectangular cooking areas.
- Free positioning of cookware inside combined cooking areas.
- Frying sensor function for temperature control in pans.
- Large cooking zone for pots up to ø 13″.
- The matte finish glass enhances the visual appeal by minimizing reflections while offering a surface that effectively reduces the visibility of fingerprints and scratches.
- Twist-Pad control – the maneuverable magnetic knob sets cooking zone and temperature.
- Easy control of all functions with bi-colored display.

Cooking zones
2 flex induction cooking areas
9″ × 7½″ (23 × 19 cm)
(2,200 W, with booster 3,700 W),
linked together 9″ × 15″ (23 × 38 cm)
(3,300 W, with booster 3,700 W).
2 flex induction cooking areas
9″ × 7½″ (23 × 19 cm)
(2,200 W, with booster 3,700 W),
linked together 9″ × 15″ (23 × 38 cm)
(3,300 W, with booster 3,700 W).
1 induction cooking zone ø 8¼″ (21 cm)
(2,200 W, with booster 3,700 W),
automatically switches to ø 10¼″ (26 cm)
(2,600 W, with booster 3,700 W) and to
ø 12⅝″ (32 cm) (3,300 W, with booster 3,700 W).

Operation
Twist-Pad control with removable magnetic knob.
User-friendly control with bi-colored display (white / orange).
Cooking zone, and cooking area marking.
Electronic power control in 17 output levels.


Features
Flex function for rectangular cooking areas.
Frying sensor function.
Booster function for pots.
Booster function for pans.
Keep warm function.
Stopwatch.
Options menu.
Power management.

Safety
Main switch.
Operation indication.
Pan detection.
2-stage residual heat indication.
Child lock.
Safety shut-off.

Planning notes
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of flat bottom cookware is recommended.
Minimum countertop thickness 1 3/16″ (30 mm) for flush installation.
The wok pan WP 400 001 cannot be used with this appliance.
Immersion depth depending on installation situation, 2¾″ for flush mount.
To insure that the appliance works correctly, the cooktop must be sufficiently ventilated either from the rear or base of the cabinet.
Appliance must be fixed from underneath. Hardware required.
Cooktop clamping range: 1 3/16″ – 1 9/16″.
Appliance weight: approx. 54 lbs.


Please read the installation details regarding air ducting on page 127.

Rating
Total rating: 9,360 W (208 / 220 V) / 10,800 W (240 V).
Total amps: 50.
208 / 220–240 V / 60 Hz.
Electrical connection:
Hardwire required, 37″ cable length.

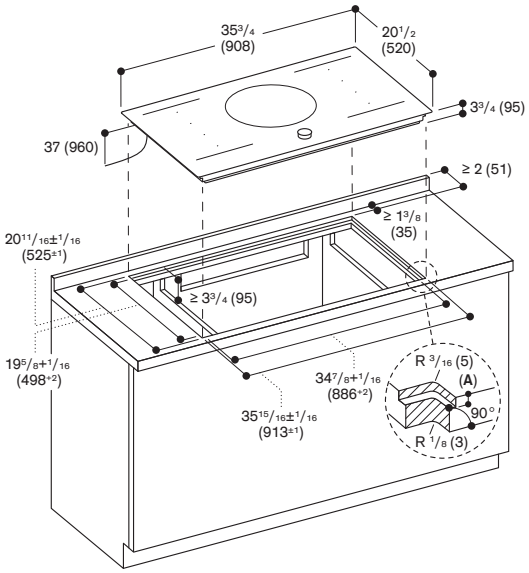


A: 1/4″ (6.5+0.5 mm)
Minimum countertop thickness 1 3/16″ (30 mm) for flush installation

View from above

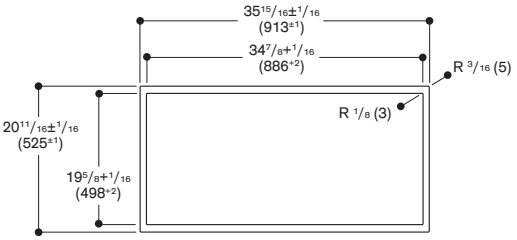


Longitudinal section

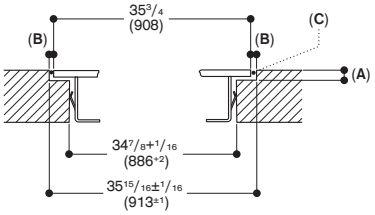

A: 1/4″ (6.5+0.5 mm)
B: 1/8″ (2.5 mm)
C: Fill with silicone

Cross-section

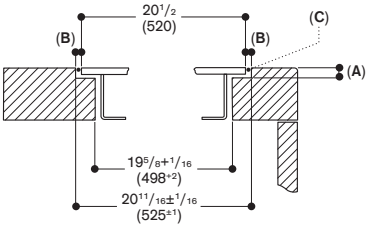

A: 1/4″ (6.5+0.5 mm)
B: 1/8″ (2.5 mm)
C: Fill with silicone

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.