# 24" Pocket Handle Dishwasher

800 Series - Stainless Steel SHPM78Z55N





SHPM78Z55N Stainless Steel

Also available in:

Black SHPM78Z54N Stainless

White SHPM78Z52N Black SHPM78Z56N

Patented CrystalDry™ technology transforms moisture into heat to get dishes, including plastics, 60% drier.\*

### Features & Benefits

42 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

The Flexible 3rd Rack with fold down sides adds 30% more\*\* loading area, perfect for utensils and ramekins.

The AquaStop® leak protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are

General Properties	
Number of wash cycles	6
Number of options	5
dBA	42
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Touch Control
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Water softener	No
Five-level wash	Yes
ChildLock	No
Special features	InfoLight®, CrystalDry™ Option
Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5
Capacity	
Number of place settings	16







	away or at nome.	ENERGY SIAR	
*Based on aggregate average drying performance of Bosch Dishwashers with CrystalDry on combined h load including plastics, glass, steel, and porcelain as compared to Bosch Dishwashers with PureDry. Dr			
	porformanco may yary by dish typo		

\*\*Compared to a Bosch dishwasher with 2 racks. Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST). Sat 6 am to 3 pm PST). Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

Technical Details			
Watts (W)	1440 W		
Current (A)	12 Amps		
Volts (V)	120 V		
Frequency (Hz)	60 Hz		
Power cord length	67"		
- Install length from corner of unit	45"		
Minimum water pressure (lb/sin)	14		
Length outlet hose (in)	79"		
Dimensions & Weight			
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"		
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"		
Adjustable feet	Yes		
Net weight (lbs)	102 lbs		
Accessories-Optional			
Junction Box	SMZPCJB1UC		
Bosch Dishwasher Water Supply Hose	SMZSH002UC		
Drain Hose Extension Kit	SGZ1010UC		
Dishwasher Accessory Kit	SMZ5000		
Anti-Tarnish Silverware Cassette	SMZ5002UC		



SMZEP001UC

**Edge Protector** 


For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904 © BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.


# 24" Pocket Handle Dishwasher


800 Series - Stainless Steel SHPM78Z55N





#### **Installation Details**

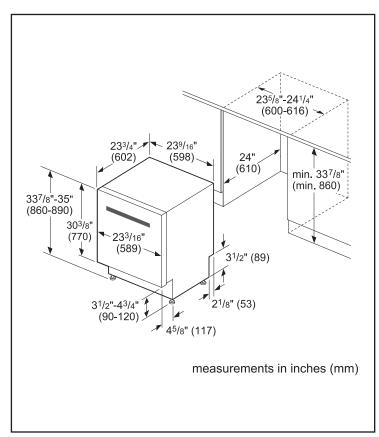

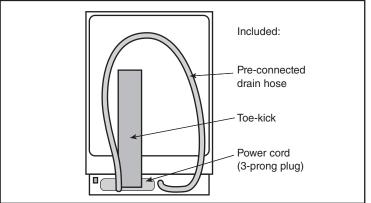

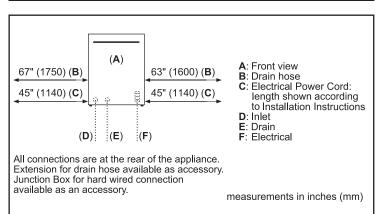

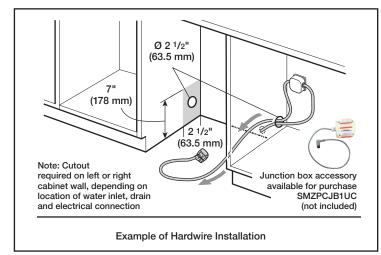

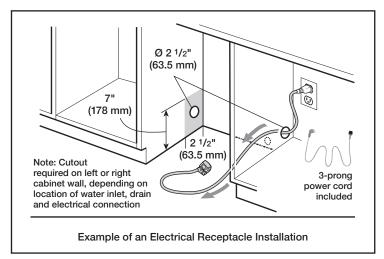

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.


# 24" Pocket Handle Dishwasher

800 Series - Stainless Steel SHPM78Z55N



### **Installation Details**





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.