



Vacuumping drawer

Gaggenau Expressive series
GV 451

GV 451 720

Stainless steel behind smoked glass.
Push-to-open.
Width 24" (60 cm),
Height 5 1/2" (14 cm).

Included accessories

- 50 vacuumping bag, small.
- 50 vacuumping bag, large.
- 1 raised vacuumping platform.
- 1 adaptor f. vacuumping outside the chamber.
- 1 vacuumping hose.
- 1 adaptor for bottle plugs.
- 3 plugs for vacuumping of bottles.

Optional accessories

Part No. 00578813

Vacuumping bags, small.
7" x 11", 100 pcs.

Part No. 00578814

Vacuumping bags, large.
9 1/2" x 14", 100 pcs.

Highlights

- Integrable in 5 1/4" (14 cm) high niche.
- Hygienic stainless steel vacuumping chamber, applicable height up to 3 1/8" (80 mm).
- 3 vacuumping levels for vacuumping in the chamber, max. 99%.
- 3 vacuumping levels for vacuumping outside the chamber, max. 90%.
- Automatic connection recognition for vacuumping outside the chamber.
- Handleless drawer.
- Push-to-open function.

Application

Vacuumping for sous-vide cooking.
Vacuumping for fast marinating and flavoring.
Vacuumping for extended storage.
Vacuumping of vacuumping containers outside the chamber.
Vacuumping of liquids in bottles outside the chamber.

Operation

Touch key operation.

Features


Oven cavity size 0.25 cu.ft. (7 liters).
Capacity load max. 22 lbs. (10 kg).
Maximum size of vacuumping bags W 9 7/16" (240 mm) x L 13 3/4" (350 mm).
3 heat-sealing levels for different strengths of bag material.
Sealing bar, non-stick coating, removable.
Safety glass cover, opens automatically after vacuumping.
Raised vacuumping platform, 1 3/8" (44 mm), deployable.
Utility space in vacuumping chamber, W 8 1/4" (210 mm) x L 10 13/16" (275 mm).
Membrane for avoiding reflow of liquids during vacuumping outside the chamber.
Drying programme for vacuumping pump.

Planning notes

Plan the cutout without back wall.
Protrusion from appliance front to cabinet 1 5/8" (42 mm).
Consider the overhang when planning to open drawers next to the appliance.
Installation of GS/GM/GC directly above GV without intermediate shelf.
The electrical box must be accessible and located outside the built-in cutout.
The electrical box can be planned behind the appliance.

Rating

Total rating: 520 W (120 V).
Total amps: 4.3 A.
Minimum fuse protection: 10 A.
120 V, 60 Hz.
Plug (NEMA 5-15P), 71" cable.

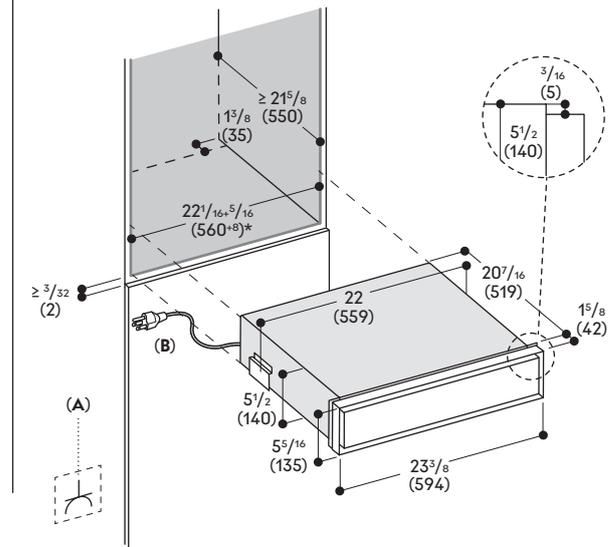

A: Accessible electrical connection

B: Fixed cable

* The width tolerance as shown in the drawing indicated by the + 5/16" (+8 mm) is the adjustment possible within the cabinet. Adjustments can be made between 5/8" - 13/16" (16-20 mm) for installation using the "centering parts" within the cabinet for perfect alignment. See installation instructions for details.