# **30" M SERIES TRANSITIONAL CONVECTION STEAM OVEN - PLUMBED**

CSOP3050TM/S/T

## **FEATURES**

The elegant, modern aesthetics pair perfectly with a full suite of similarly styled Sub-Zero, Wolf, and Cove appliances.

Plumbed and non-plumbed options for maximum installation flexibility.

Full-color touchscreen simplifies use

Save up to 50 personalized favorite recipe presets.

Cooking modes include Steam, Convection, Broil, Slow Roast

1750-Watt recessed broil element.

2.4 cubic-foot oven cavity allows multiple dishes to be placed side by side at once.

1889-Watt dual convection system ensures even, multi-rack baking and consistent results.

Three full-extension rack positions and one standard position allow easy access and increased cooking flexibility.

The temperature probe alerts you when your dish has reached the desired temperature.

### ACCESSORIES

Broil Rack

**Descaling Solution** 

Perforated Pan - 12 3/4" x 1 1/2" x 7"

Porcelain Steam Enameled Broil Pan

Solid Pan - 12 3/4" x 1 1/2" x 7"

Solid Pan - 24 3/4" x 1 3/8" x 14 1/2"

Standard Oven Rack

**Temperature Probe** 

Accessories available through an authorized dealer. For local dealer information, visit <u>subzero-wolf.com/locator</u>.



#### Specifications are subject to change without notice. This information was generated on October 6, 2022. Verify specifications prior to finalizing your cabinetry/enclosures.

2<sup>3</sup>/4" (70) TO 5" (127)

2" (51)


TO 27<sup>1</sup>/2"


(699)

## **PRODUCT SPECIFICATIONS**


Model	CSOP3050TM/S/T
Dimensions	29 7/8"W x 17 7/8"H x 22 1/2"D
Oven Interior Dimensions	25 1/4"W x 10 3/4"H x 15 1/8"D
Overall Capacity	2.4 cu. ft.
Usable Capacity	1.8 cu. ft.
Door Clearance	14 3/16"
Weight	91 lbs
Electrical Supply	240/208 VAC, 60 Hz
Electrical Service	20 amp dedicated circuit
Plumbing Supply	3/8" OD copper, braided stainless steel or PEX tubing
Plumbing Pressure	15–145 psi
Conduit Length	4 Feet

# DIMENSIONS






# **STANDARD INSTALLATION**



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

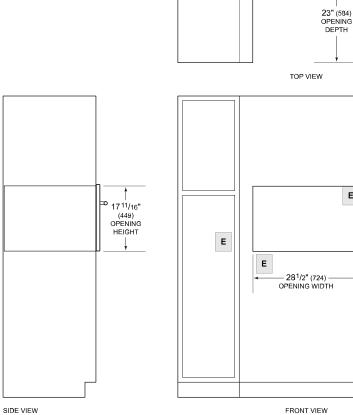

FRONT VIEW

Е

NOTE: Location of electrical supply within opening may require additional cabinet depth.