



Kitchenaid® 30" Electric Downdraft Cooktop with 4 Elements

KCED600GSS

Available Finishes/Colours

KCED600GSS
Stainless Steel

KCED600GBL
Black

This 30" electric cooktop features Downdraft, an integrated ventilation system that doesn't require a separate hood. A 10-inch Even-Heat™ Ultra element provides versatility for both high- and low-temperature cooking, and has multiple simmer settings. And with a 3-speed fan with 300 CFM exhaust rating, the venting can keep up with your culinary feats.

Top Features

Downdraft Ventilation

10" Even-Heat™ Ultra Element with Simmer Setting

6" Even-Heat™ Element with Melt Setting

Manuals & Literature:

 [Dimension Guide](#)  [Energy Guide](#)

 [Installation Instruction](#)

Dimensions		Cooktop Details	
Depth	22.06	Number Of Cooking Element Burners	4
Height	3.63	Right Front Element Burner Power	1200W
Width	30.88	Right Front Element Burner Size	6in.
Energy		Right Front Element Burner Type	Standard
Annual Energy Usage Kwh	195	Right Rear Element Burner Power	3000W/1400W
Cooktop Details		Right Rear Element Burner Size	9in./6in.
Left Front Element Burner Type	Even-Heat™ Ultra	Right Rear Element Burner Type	Dual
Left Rear Element Burner Power	1300W		
Left Rear Element Burner Size	6in.		
Left Rear Element Burner Type	Even-Heat™		

KitchenAid® 30" (76.2 cm) and 36" (91.4 cm) Electric Downdraft Cooktop

PRODUCT MODEL NUMBERS

KCED600G KCED606G


ELECTRICAL REQUIREMENTS

To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.


- A 4-wire or 3-wire, single-phase, 120-/240-volt, 60 Hz., AC-only electrical supply on a separate, 40-amp circuit breaker is required for both 30" (76.2 cm) and 36" (91.4 cm) models. If a fused system is used, fuse both sides of the line.
- The cooktop should be connected directly to the junction box through the flexible metal conduit. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.

PRODUCT DIMENSIONS

30" (76.2 cm) Cooktop - for standard and electric models

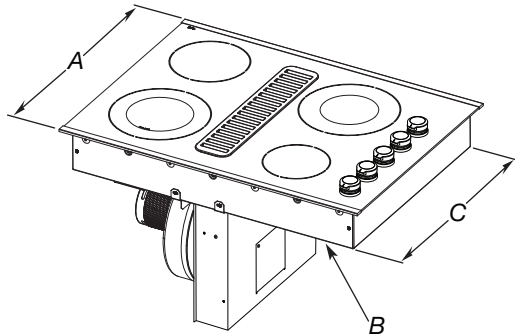


- A. 22¹/₁₆" (56.0 cm) without stainless steel trim or 22¹/₂" (57.2 cm) or 23" (58.5 cm) with stainless steel trim (depending on model)
 B. Model/serial/rating/clearance plate location
 C. 20³/₄" (52.7 cm) screw head to screw head

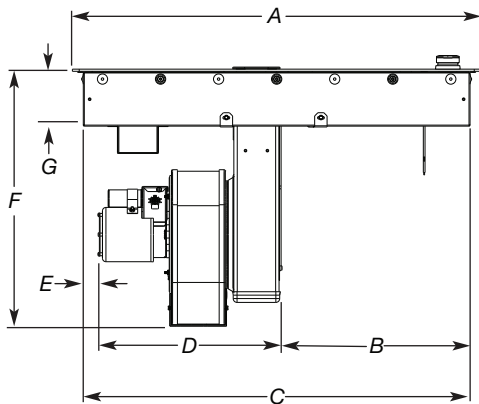


- A. 30⁷/₈" (78.4 cm)
 B. 12³/₁₆" (31.0 cm)
 C. 28¹³/₆₄" (72.3 cm)
 D. 14²³/₃₂" (37.4 cm)
 E. 2" (5.1 cm) recommended minimum cabinet to motor clearance
 F. 18²³/₃₂" (47.6 cm)
 G. 3²¹/₃₂" (9.3 cm)

36" (91.4 cm) Cooktop - for standard and electric models

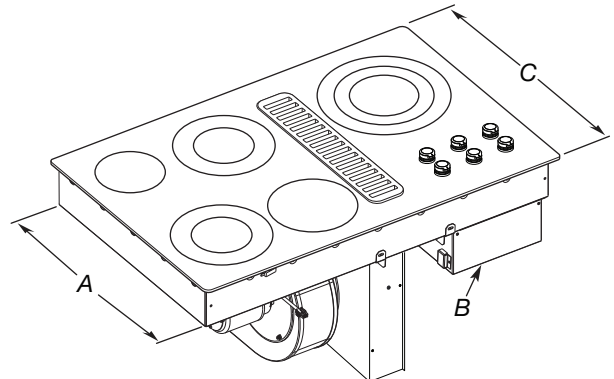


- A. 20³/₄" (52.7 cm) screw head to screw head
 B. Model/serial/rating/clearance plate location
 C. 22¹/₁₆" (56.0 cm) without stainless steel trim or 22¹/₂" (57.2 cm) or 23" (58.5 cm) with stainless steel trim (depending on model)

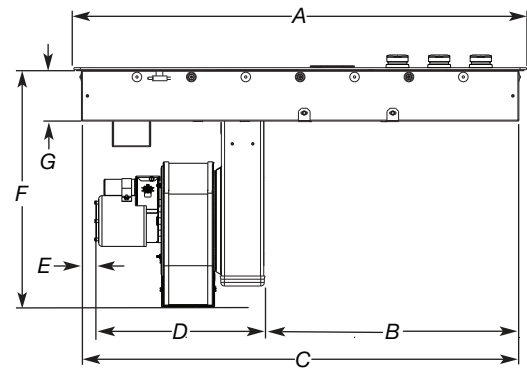

- A. 36⁵/₁₆" (92.3 cm)
 B. 11¹⁹/₃₂" (29.4 cm)
 C. 34¹¹/₆₄" (86.8 cm)
 D. 14²³/₃₂" (37.4 cm)
 E. 2" (5.1 cm) recommended minimum cabinet to motor clearance
 F. 18²³/₃₂" (47.6 cm)
 G. 3²¹/₃₂" (9.3 cm)

CABINET DIMENSIONS

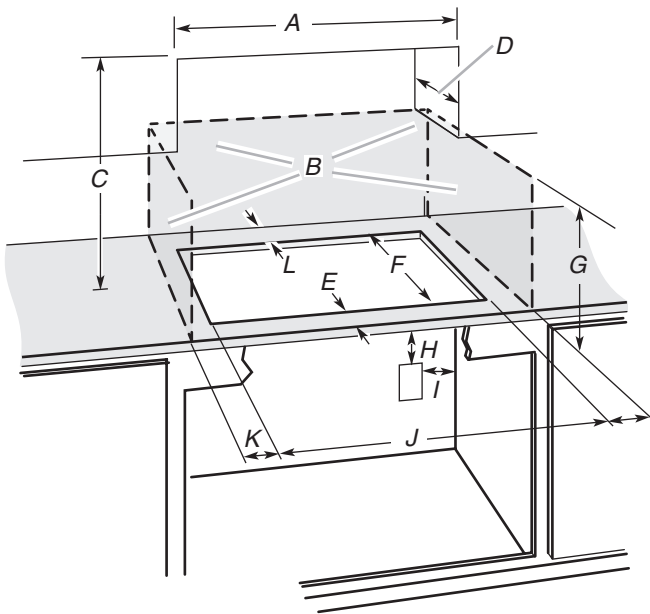


- A. 30" (76.2 cm) on 30" (76.2 cm) models
36" (91.4 cm) on 36" (91.4 cm) models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/8" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, 0.024" [0.06 cm] aluminum, or 0.020" [0.05 cm] copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F. 21 1/8" (53.7 cm)
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet: 12" (30.5 cm) minimum from bottom of countertop
- I. Junction box or outlet: 10" (25.4 cm) from right-hand side of cabinet
- J. 28 7/8" (73.3 cm) on 30" (76.2 cm) models
34 9/16" (87.8 cm) on 36" (91.4 cm) models
- K. 2 1/8" (6.4 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 1 1/2" (3.8 cm) minimum clearance between back wall and countertop

NOTE: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

- A minimum side clearance of 6" (15.2 cm) is recommended between side of cooktop and side wall for maximum ventilation performance.

CUTOUT DIMENSIONS

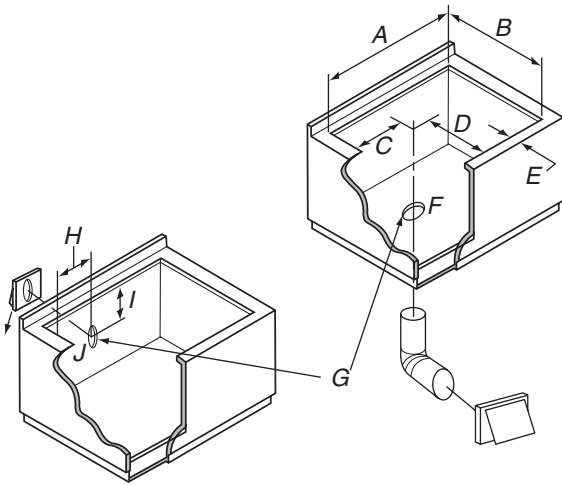

- A. 28 7/8" (73.3 cm) maximum on 30" (76.2 cm) models
34 9/16" (87.8 cm) maximum on 36" (91.4 cm) models
- B. 21 1/8" (50.6 cm) maximum on both 30" (76.2 cm) and 36" (91.4 cm) models
- C. 8 19/32" (21.8 cm) on 30" (76.2 cm) models
15 7/16" (39.2 cm) on 36" (91.4 cm) models
- D. 6 19/64" (16.0 cm) on both 30" (76.2 cm) and 36" (91.4 cm) models
- E. 2" (5.1 cm) minimum space to front edge of cooktop
- F. Floor exhaust option
- G. 6 1/8" (15.6 cm) for 6" (15.2 cm) vent system
5 1/8" (13 cm) for 5" (12.7 cm) vent system
- H. 8 19/32" (21.8 cm) on 30" (76.2 cm) models
15 7/16" (39.2 cm) on 36" (91.4 cm) models
- I. 16" (40.6 cm) on both 30" (76.2 cm) and 36" (91.4 cm) models
- J. Wall exhaust option